



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

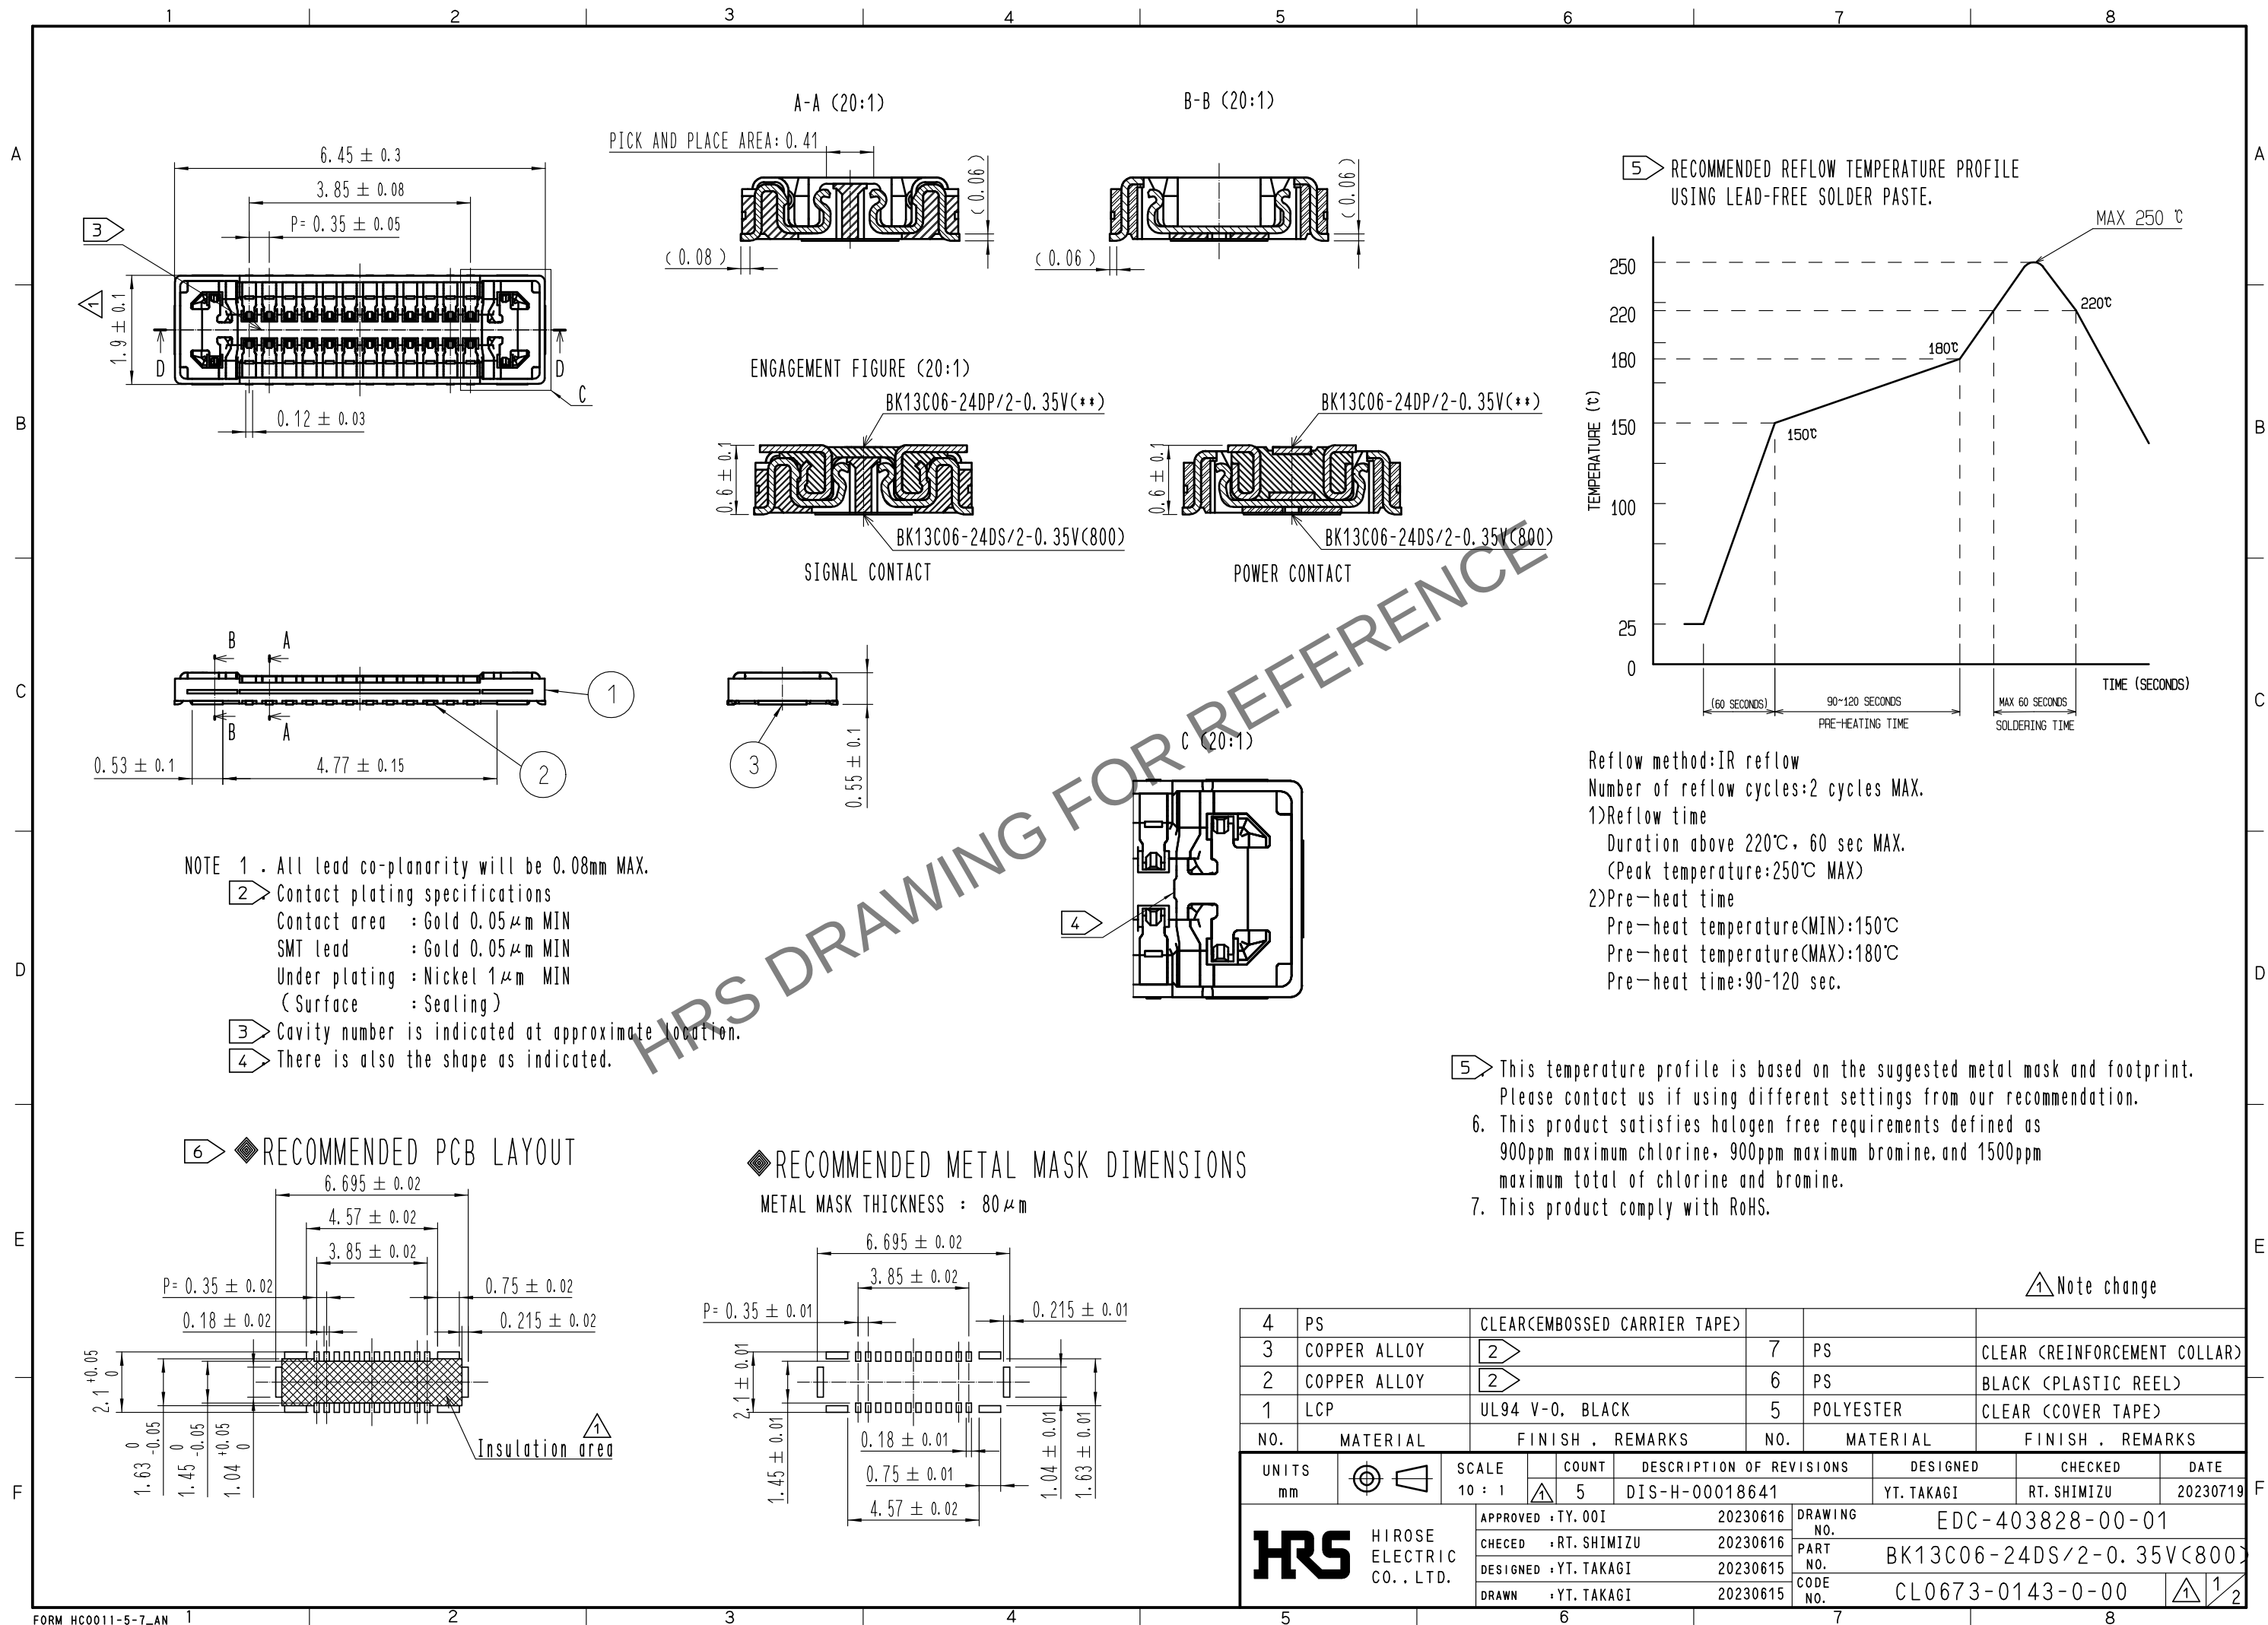


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)

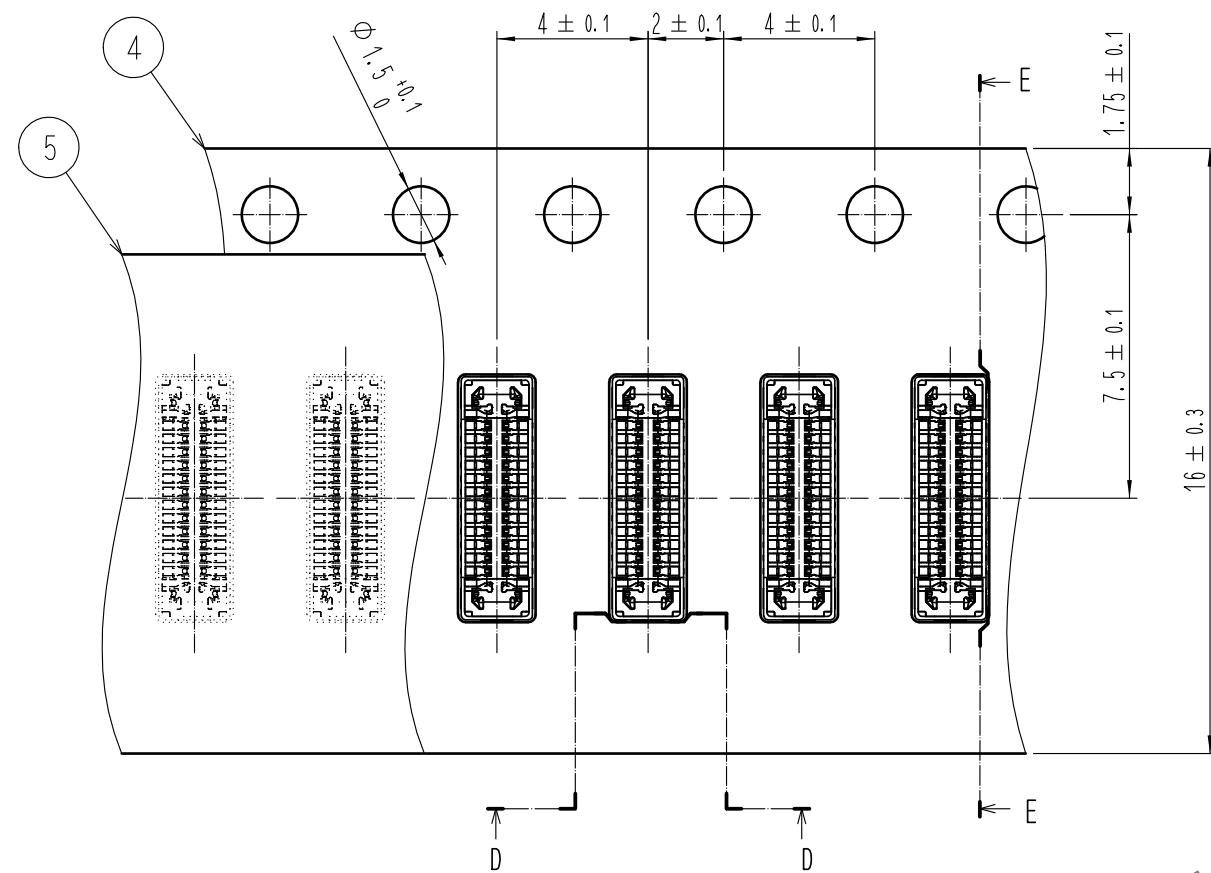


D-D (5:1)




DIRECTION OF UNREELING

E-E (5:1)

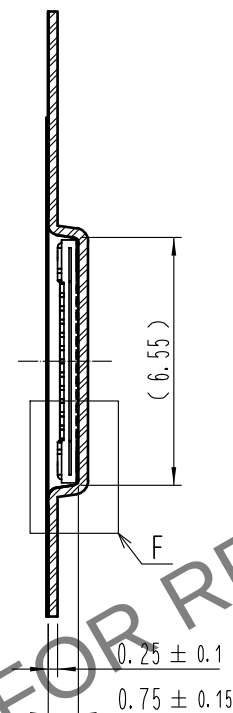


D-D (5:1)




DIRECTION OF UNREELING


E-E (5:1)

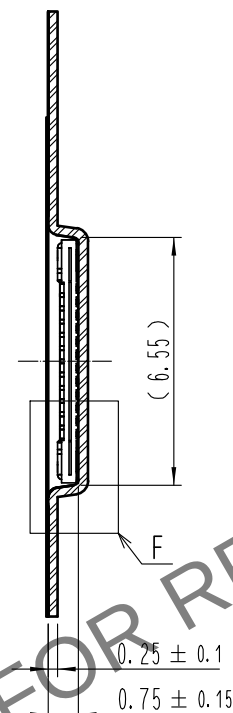



STYLE AND DIMENSION OF REEL (FREE)

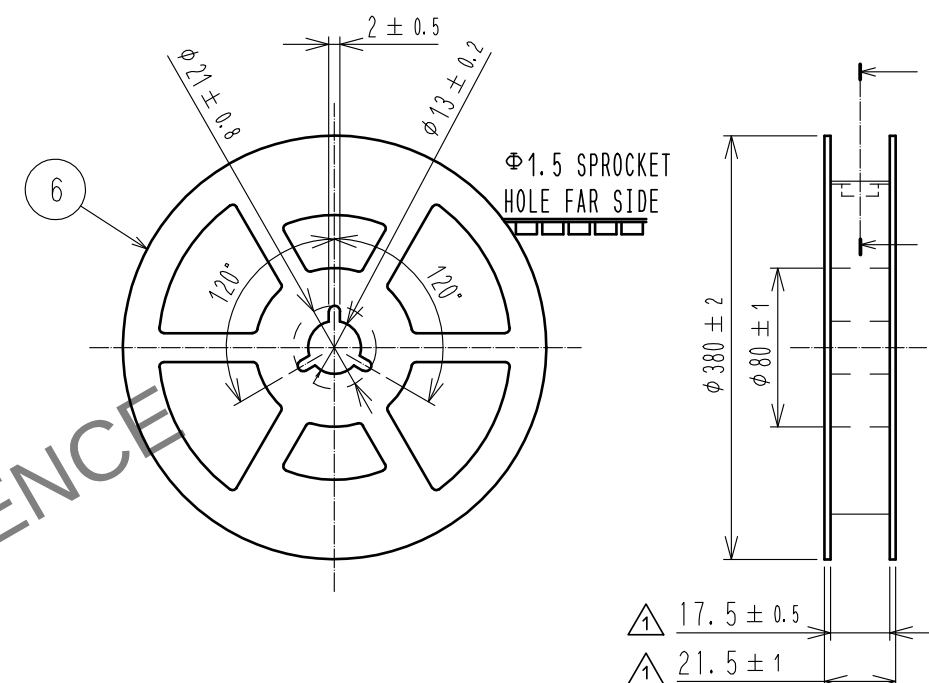

G-G (FREE)

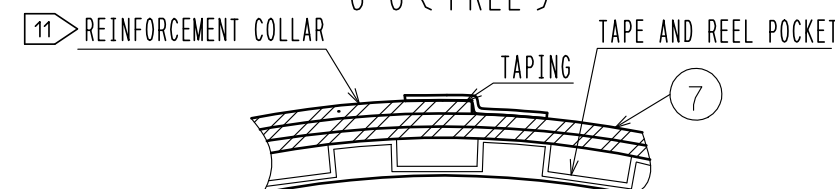

F (10:1)

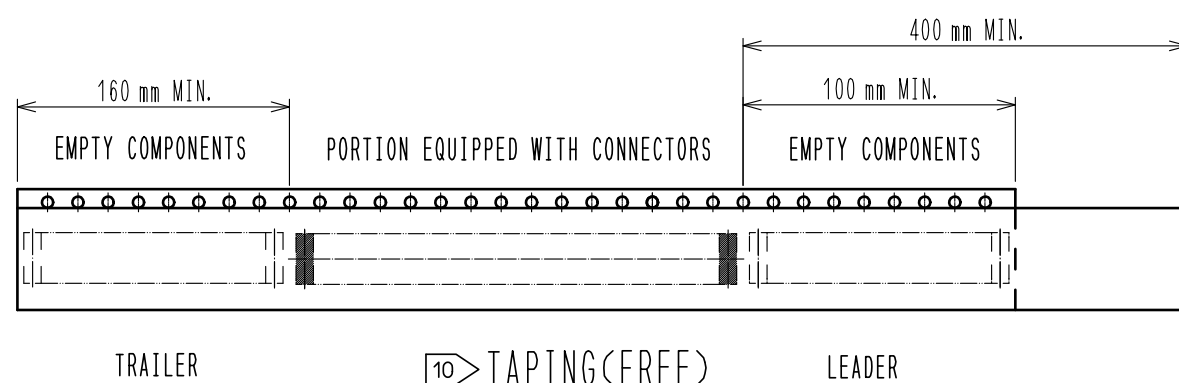

- 8 . 20,000 connectors per reel.
- 9 . The dimensions in parentheses are for reference.
- 10 . Refer to IEC 60286-3 (packaging of components for automatic handling)
- 11 . The reinforcing collar is wrapped around the emboss tape and taped down at the end of the collar.

HRS

DRAWING NO.	EDC-403828-00-01
PART NO.	BK13C06-24DS/2-0.35V(800)
CODE NO.	CL0673-0143-0-00

1/2