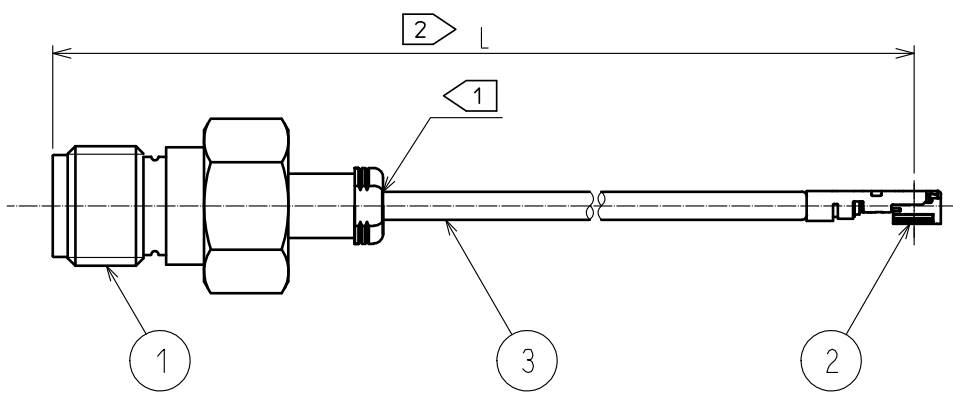
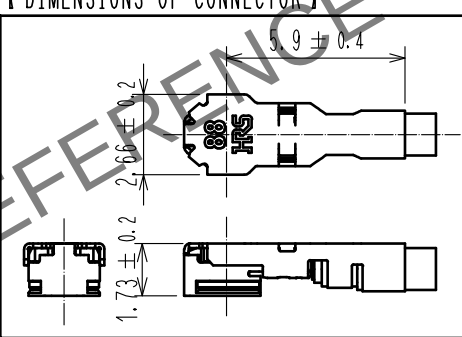

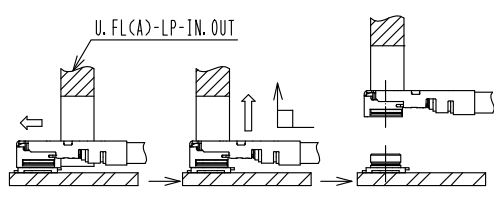
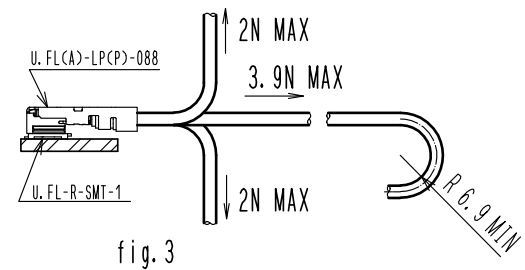


1		2		3		4							
													
NOTE 1 Do not apply any excessive stress to the cable assembly position. 2 We indicate the length of the harness on the last of product name. 'L' part. Tolerance for [L] <table border="1"><thead><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>$50 \leq L \leq 200$</td><td>± 4</td></tr><tr><td>$200 < L \leq 400$</td><td>± 8</td></tr></tbody></table> 3. Specifications are subject to change without notice.								Length L [mm]	Tolerance [mm]	$50 \leq L \leq 200$	± 4	$200 < L \leq 400$	± 8
Length L [mm]	Tolerance [mm]												
$50 \leq L \leq 200$	± 4												
$200 < L \leq 400$	± 8												
				<table border="1"><thead><tr><th>Part No.</th><th>Cable color</th></tr></thead><tbody><tr><td>~088Y1T~</td><td>GRAY</td></tr><tr><td>~088Y2T~</td><td>BLACK</td></tr></tbody></table>				Part No.	Cable color	~088Y1T~	GRAY	~088Y2T~	BLACK
Part No.	Cable color												
~088Y1T~	GRAY												
~088Y2T~	BLACK												
				【 DIMENSIONS OF CONNECTOR 】 									
【 PRECAUTIONS FOR HANDLING 】 1. Connector insertion and extraction (1) Insert the connector as perpendicularly to the mating surface as possible with aligning the mating axes of both connectors by specialised insertion JIG. Part No. :U.FL(A)-LP-IN.OUT(CL331-2401-0) (fig.1) ◆ Do not excessively slant the connectors when inserting. (2) Connector shall be extracted by specialised extraction JIG. Part No. :U.FL(A)-LP-IN.OUT(CL331-2401-0) (fig.2) ◆ Never hold the cable when extracting the cable because it damages the connector. 2. Allowable loads on the cable after the connectors are mated. The below figures show the maximum allowable loads on the cable. (fig.3) ◆ Do not apply loads exceeding these values to the cable.													
  													
2 U.FL(A)-LP(P)-088		CL331-2400-0-00											
1 HRM(G)-200-088JBN		CL323-0960-0-00		3 RF-1.37/50 SY137/50		Shenyu Communication							
N o. PART NO.		CODE NO.		N o. PART NO.		MANUFACTURER							
UNITS mm		SCALE FREE		COUNT 1		DESCRIPTION OF REVISIONS							
						DIS-D-00005051							
				DESIGNED MK. INOUE		CHECKED TO. KATAYAMA							
						DATE 20200616							
F		APPROVED :TO. KATAYAMA 20200615		DRAWING NO.									
		CHECKED :TO. KATAYAMA 20200615		PART NO.									
		DESIGNED :MK. INOUE 20200615		CODE NO.									
		DRAWN :MK. INOUE 20200615		HRMGJ-UFLA-088Y*T-A-L									
				1/1									

FORM HC0011-5-1