


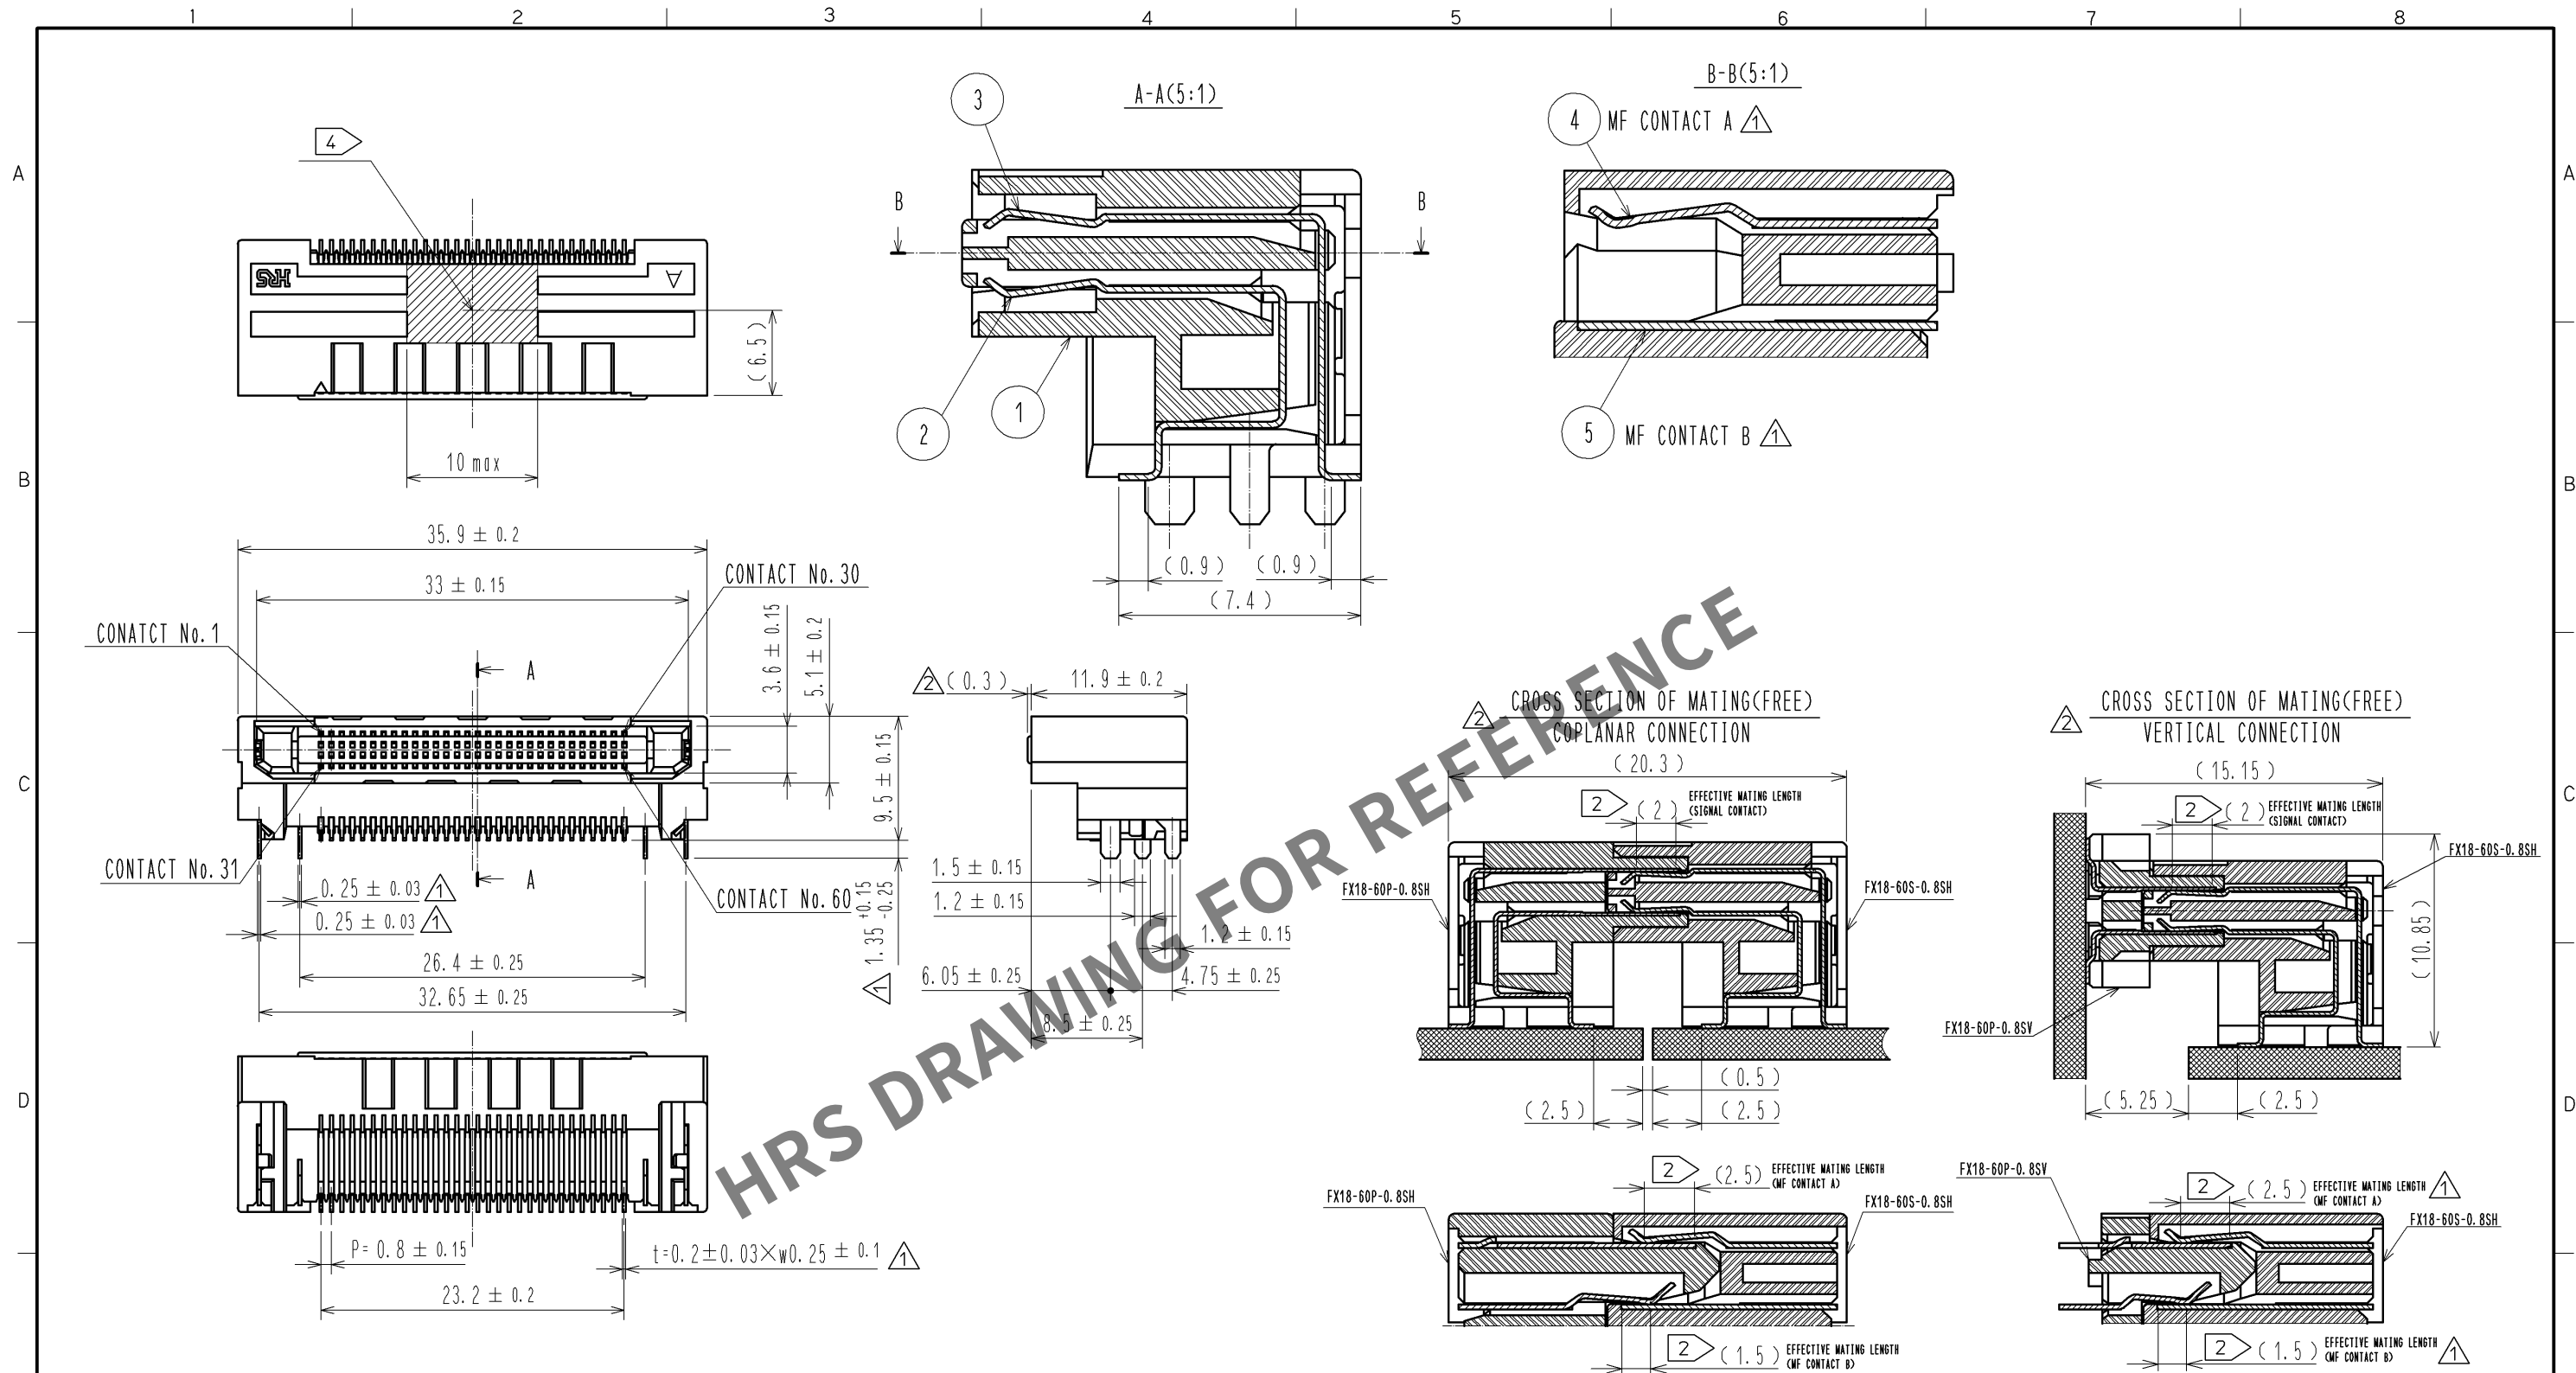


①② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.

4 IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.

6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.

7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm	6	POLYSTYRENE	
		LEAD AREA:GOLD 0.03μm			CONTACT AREA:GOLD 0.1μm
		UNDER PLATING:NICKEL 1.3μm 	5	PHOSPHOR BRONZE	LEAD AREA:TIN-PLATING 1μm
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm			UNDER PLATING:NICKEL 1.3μm 
		LEAD AREA:GOLD 0.03μm			CONTACT AREA:GOLD 0.1μm
		UNDER PLATING:NICKEL 1.3μm 	4	PHOSPHOR BRONZE	LEAD AREA:TIN-PLATING 1μm
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3μm 
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT  7	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO	CHECKED KI. HIROKAWA	DATE 11. 07. 21
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA 09. 04. 24 CHECED : HS. OZAWA 09. 04. 24 DESIGNED : KI. HIROKAWA 09. 04. 24 DRAWN : KI. HIROKAWA 09. 04. 24	DRAWING NO. EDC3-159082-00 PART NO. FX18-60S-0. 8SH CODE NO. CL579-0010-3-00		

