


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

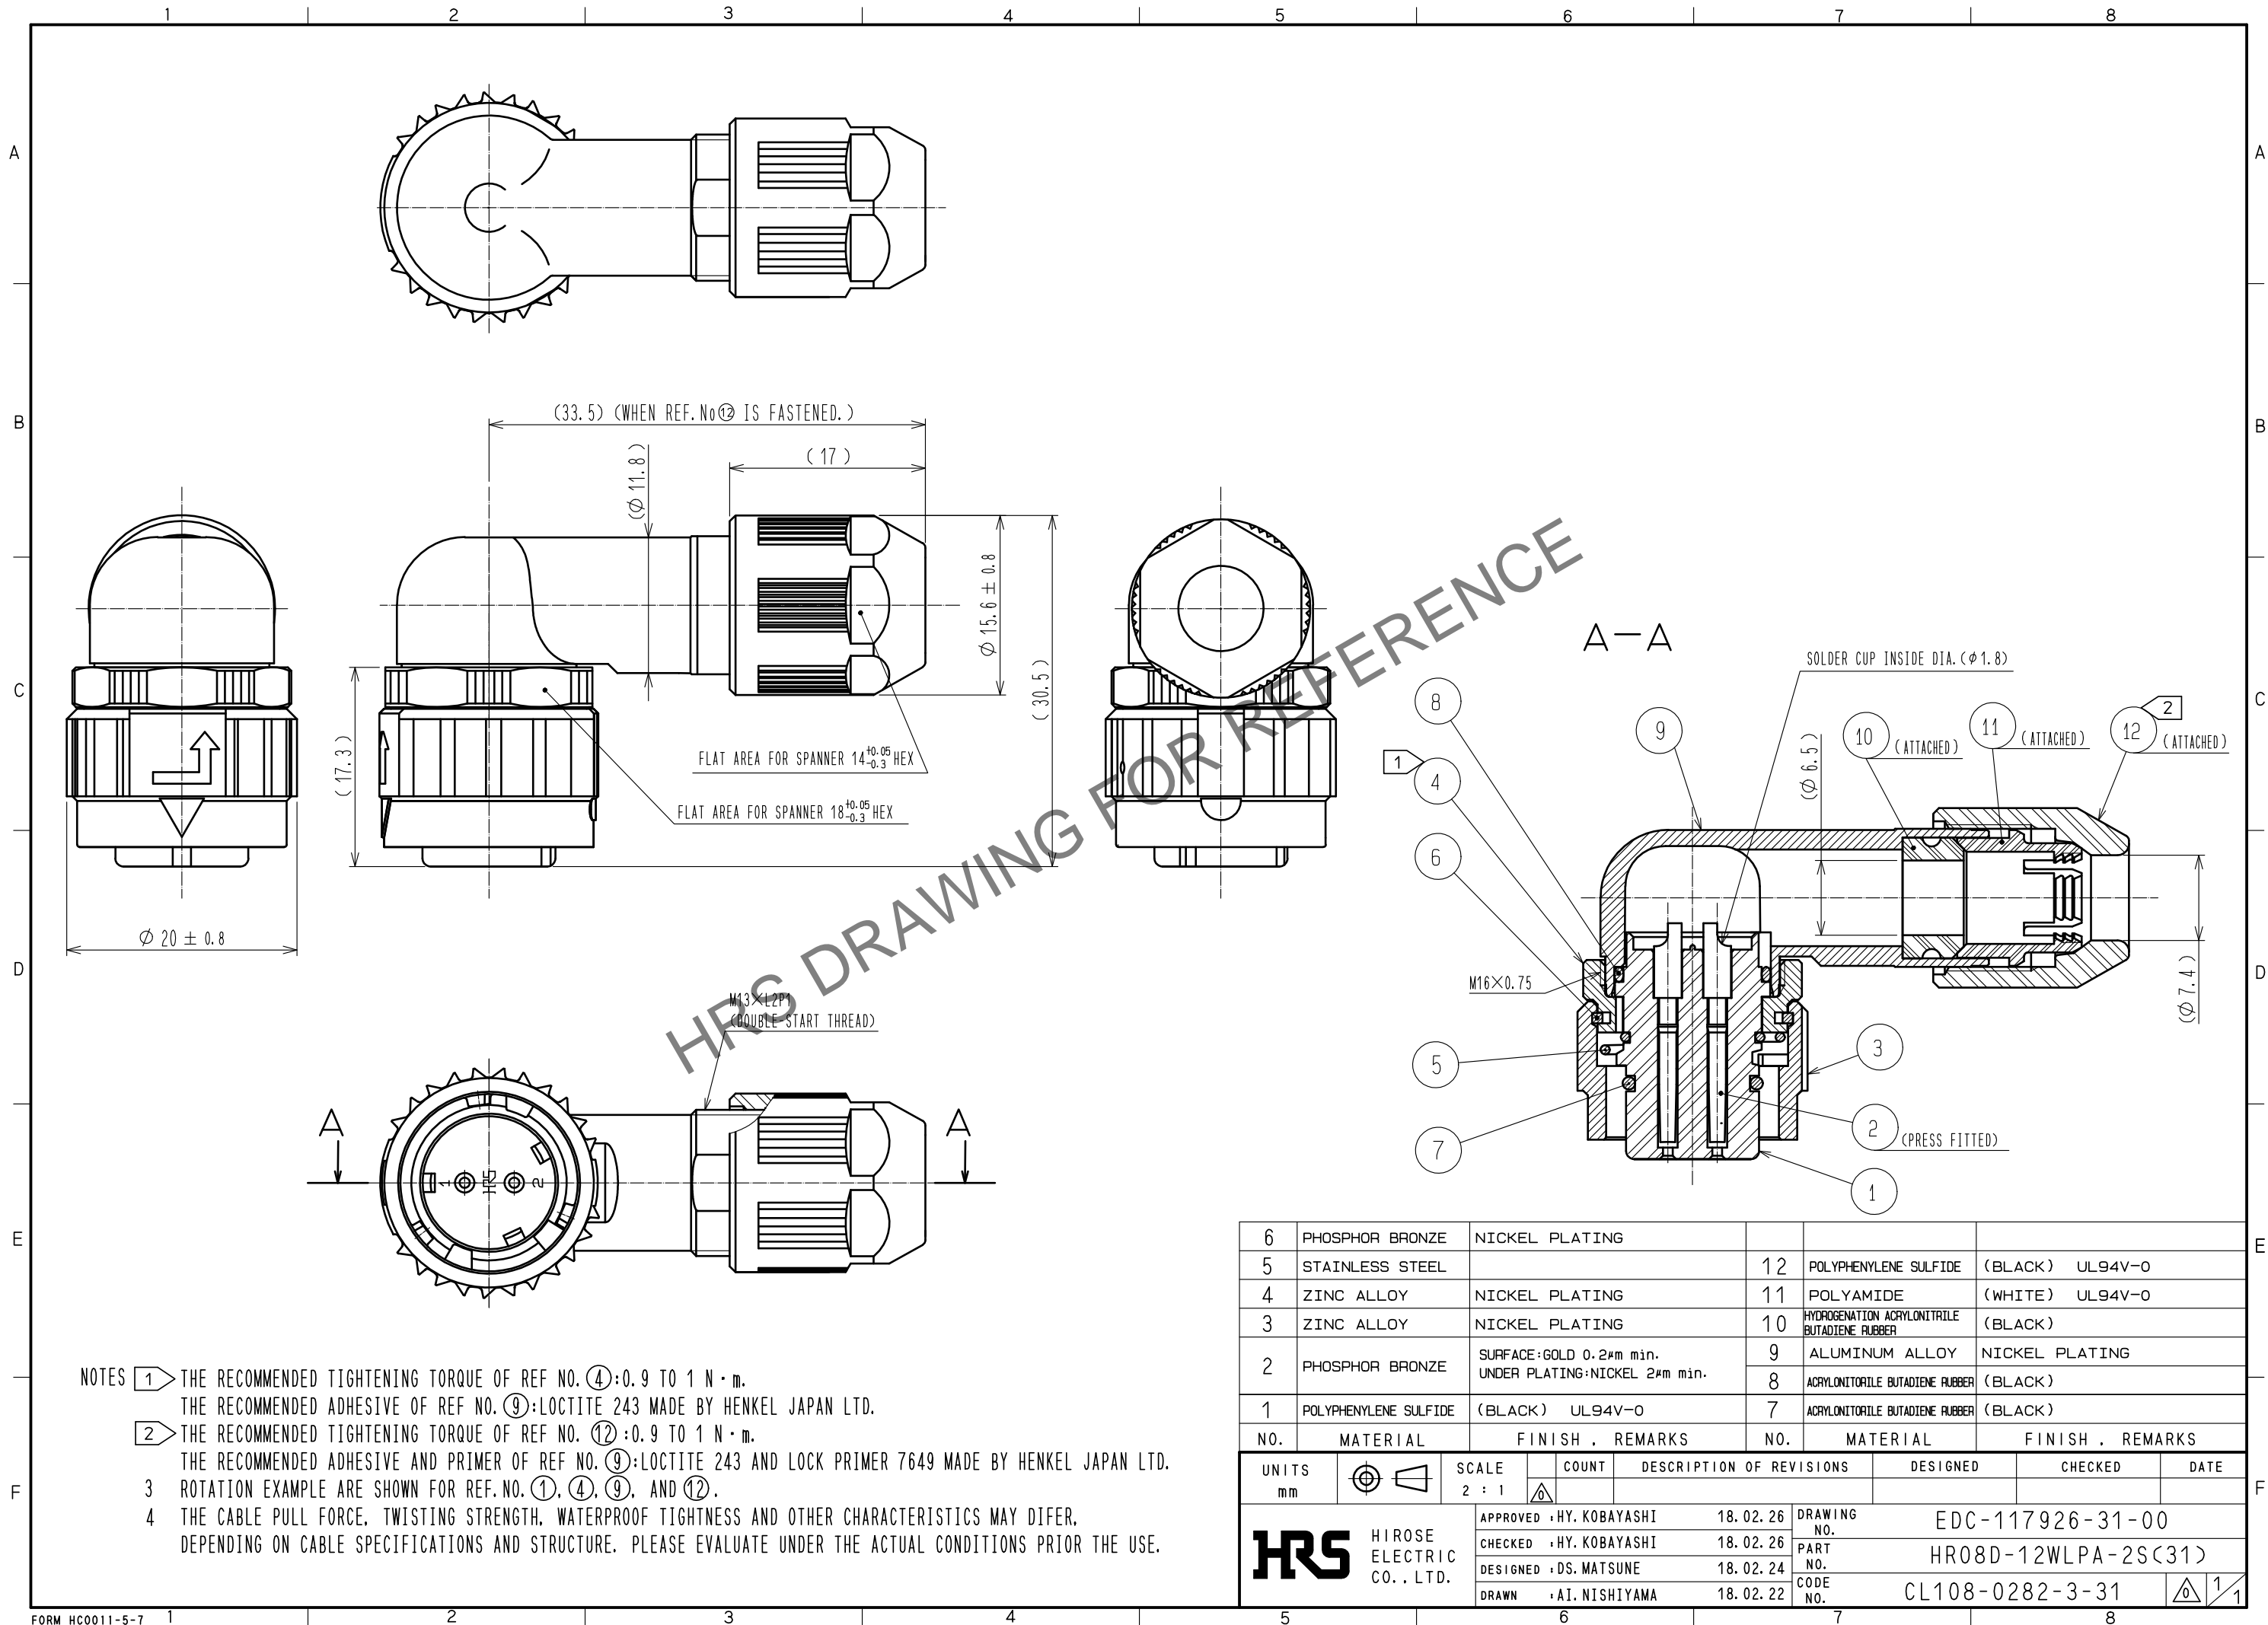

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ④: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE OF REF. NO. ⑨: LOCTITE 243 MADE BY HENKEL JAPAN LTD.
② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑫: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑨: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
3 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
4 THE CABLE PULL FORCE, TWISTING STRENGTH, WATERPROOF TIGHTNESS AND OTHER CHARACTERISTICS MAY DIFER,
DEPENDING ON CABLE SPECIFICATIONS AND STRUCTURE. PLEASE EVALUATE UNDER THE ACTUAL CONDITIONS PRIOR THE USE.

6	PHOSPHOR BRONZE	NICKEL PLATING			
5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE	(WHITE) UL94V-0
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	PHOSPHOR BRONZE	SURFACE: GOLD 0.2μm min. UNDER PLATING: NICKEL 2μm min.	9	ALUMINUM ALLOY	NICKEL PLATING
			8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	18.02.26	DRAWING NO. EDC-117926-31-00
		CHECKED	HY. KOBAYASHI	18.02.26	PART NO. HR08D-12WLPA-2S(31)
		DESIGNED	DS. MATSUNE	18.02.24	CODE NO. CL108-0282-3-31
		DRAWN	AI. NISHIYAMA	18.02.22	
				1	1