



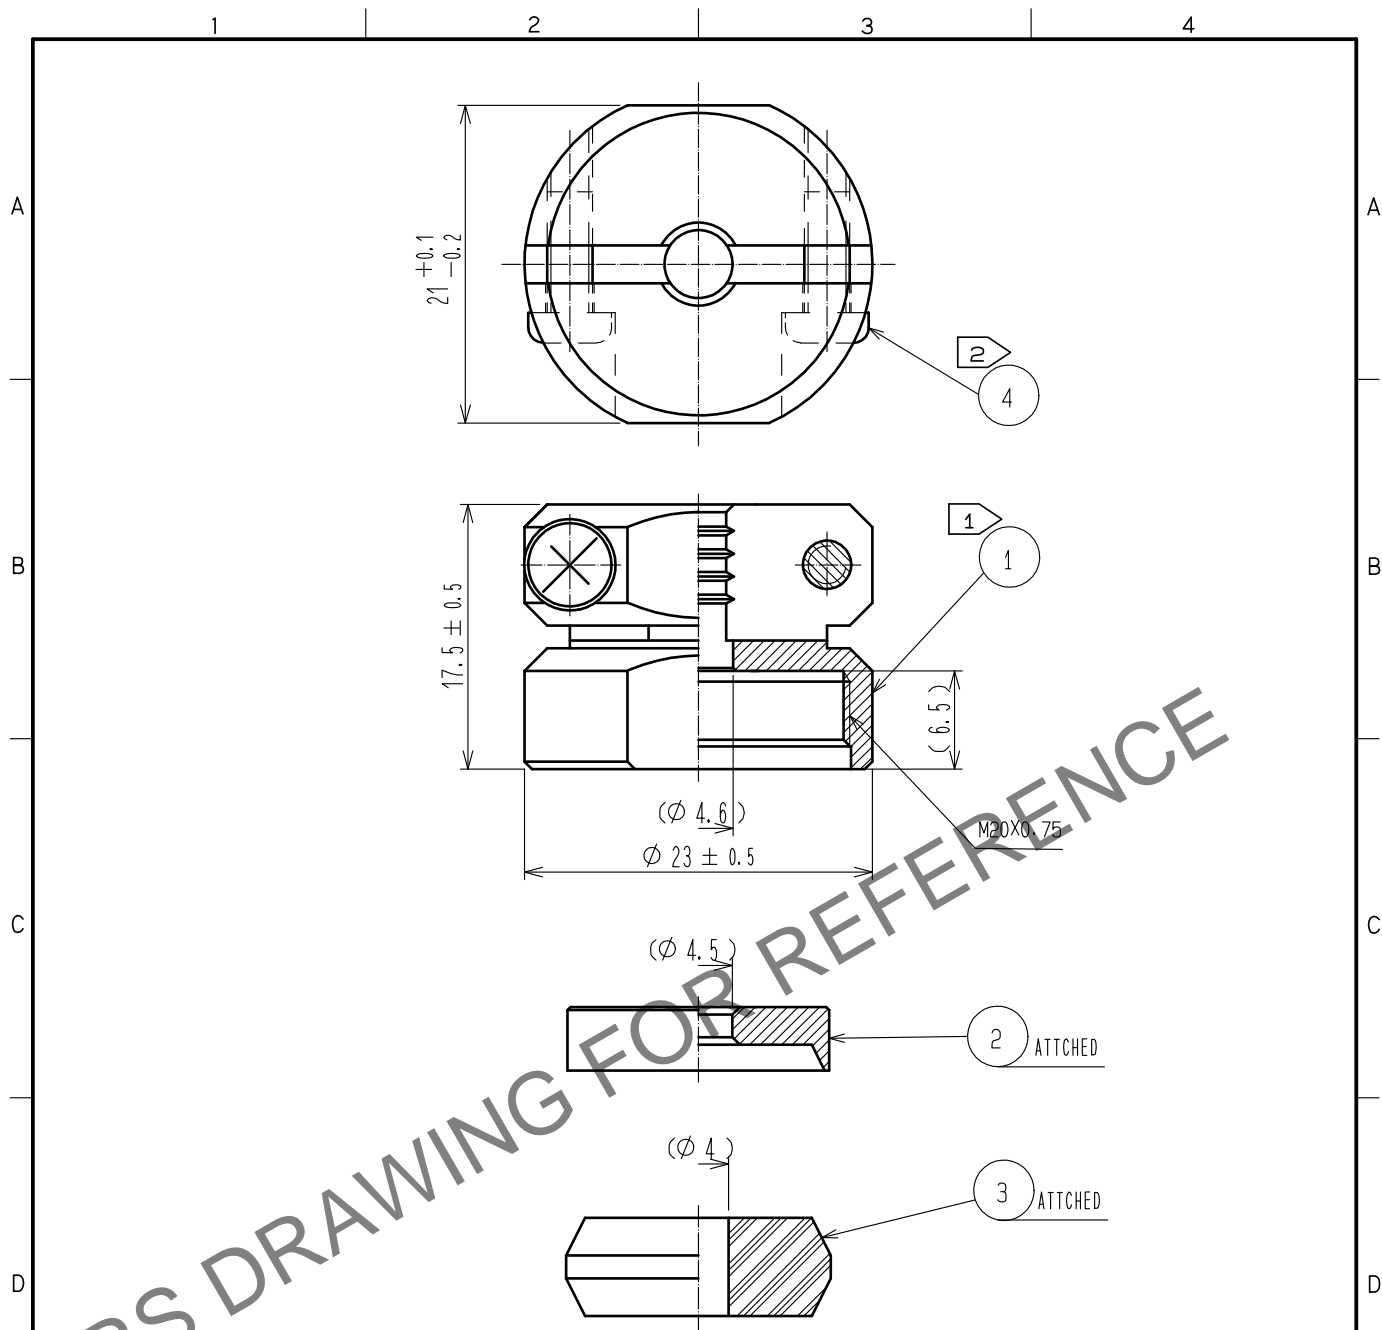


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- ① The recommended clamp torque of REF. No. ① to be 3 to 3.5 N·m. LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent REF. No. ① from loosening.
 - ② The recommended clamp torque of REF. No. ④ to be 0.65 to 0.7 N·m.
 - ③ Sealing and airtightness and oil resisting shall be tested under mated condition with an applicable connector.

2	BRASS	NICKEL PLATING		4	STAINLESS STEEL	M3×0.5×8			
1	BRASS	CHROME PLATING		3	SILICONE RUBBER	(BLACK)			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
<div>HIROSE ELECTRIC CO., LTD.</div>		APPROVED		HY. KOBAYASHI	15.08.05	DRAWING NO. EDC-110600-72-00			
		CHECKED		HY. KOBAYASHI	15.08.05	PART NO. JR16WCC-4(72)			
		DESIGNED		HY. KISHI	15.08.05	CODE NO. CL114-2052-6-72			
		DRAWN		HY. KISHI	15.08.05	 1			