
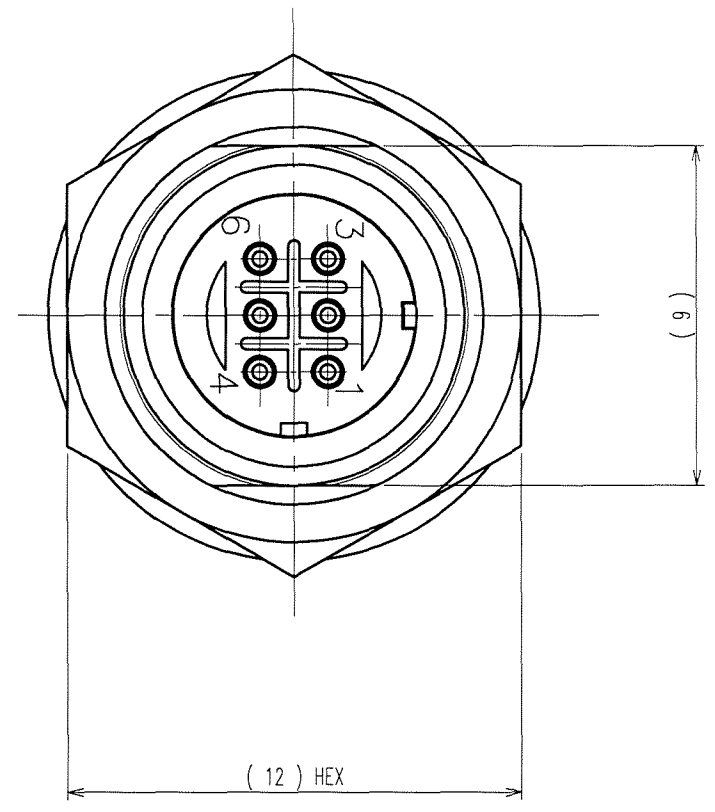
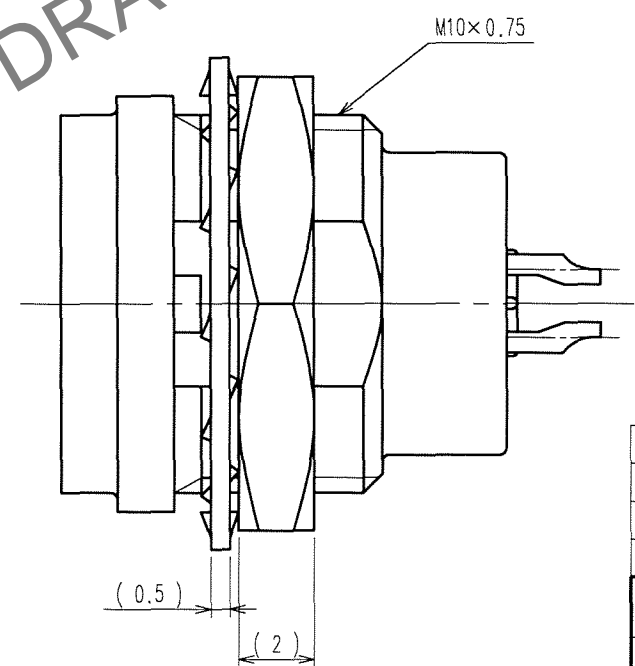
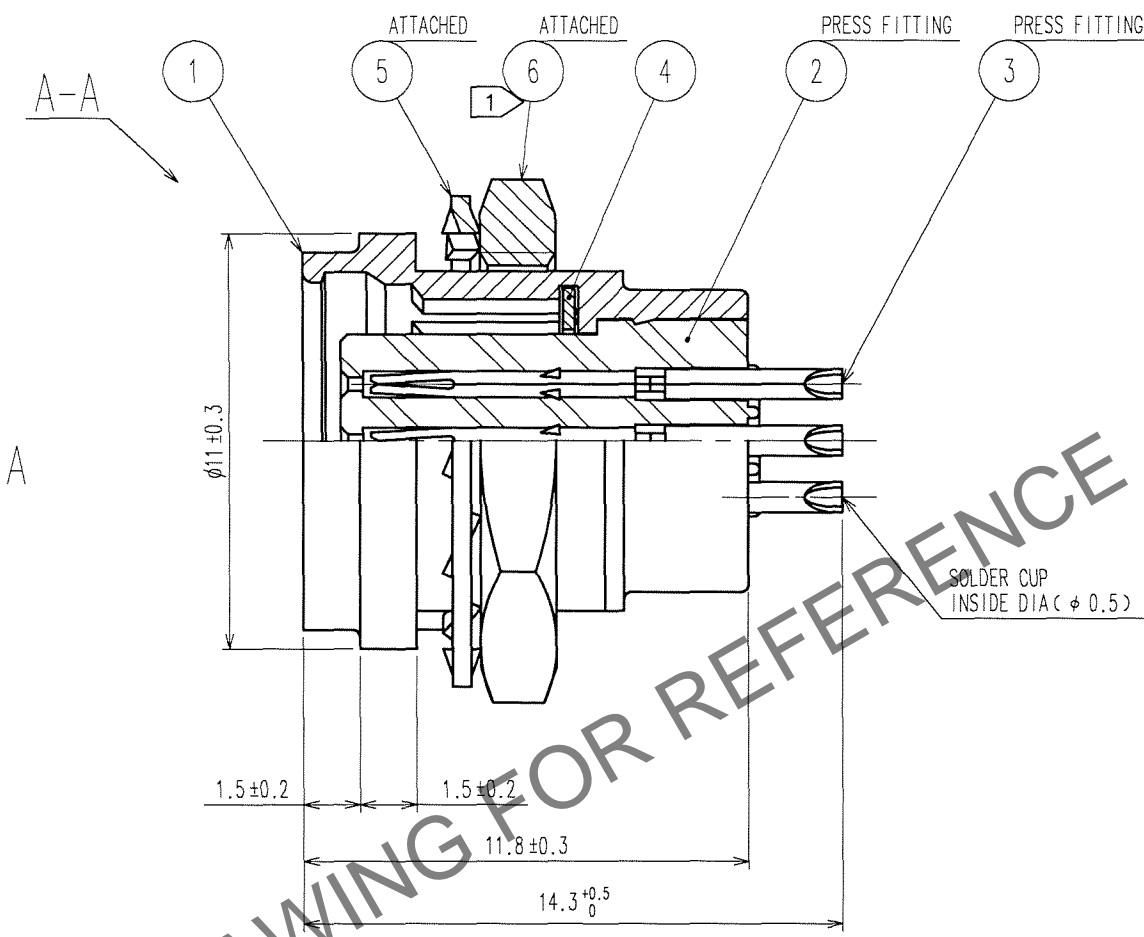


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

A
B
C
D
E
F

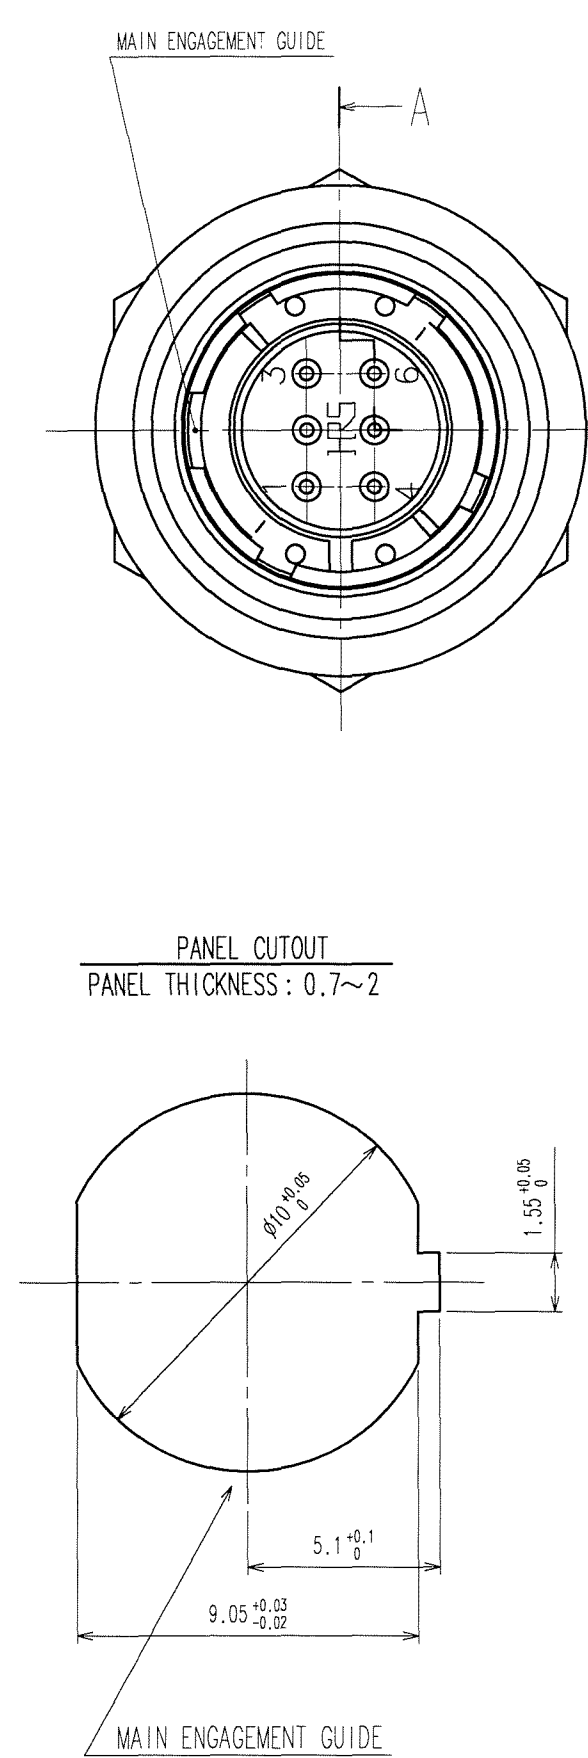

- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
 - 2 CONTACT AREA : GOLD 0.2μm min. TERMINAL AREA : GOLD FLASH. UNDER PLATING : NICKEL 2μm min

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

3	PHOSPHOR BRONZE	2	6	BRASS 1	NICKEL PLATED
2	PPS	(BLACK) 94V-0	5	PHOSPHOR BRONZE	NICKEL PLATED
1	ZINC ALLOY	MATE FINISH NICKEL PLATED	4	BERYLLIUM COPPER	NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			Y.YAMADA	Y.YAMADA	T.AKIYAMA
			'05 11 05	'05 11 05	'05 11 05
					M.SATO
					'05 11 05
DRAWING NO. EDC3-114769			PART NO. HR25A-7R-6S		
SCALE 5 : 1			CODE NO. CL125-0603-0		
UNITS mm					
HRS HIROSE ELECTRIC CO., LTD					

A
B
C
D
E
F