
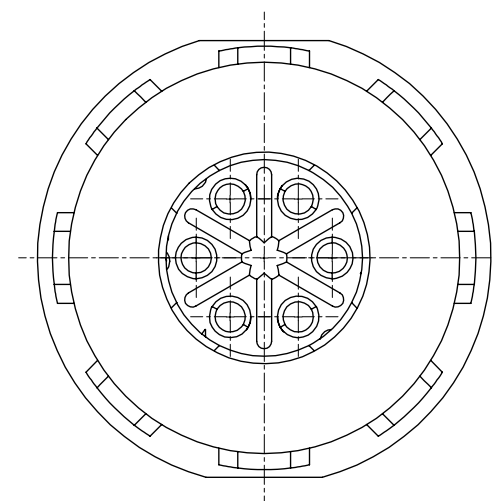
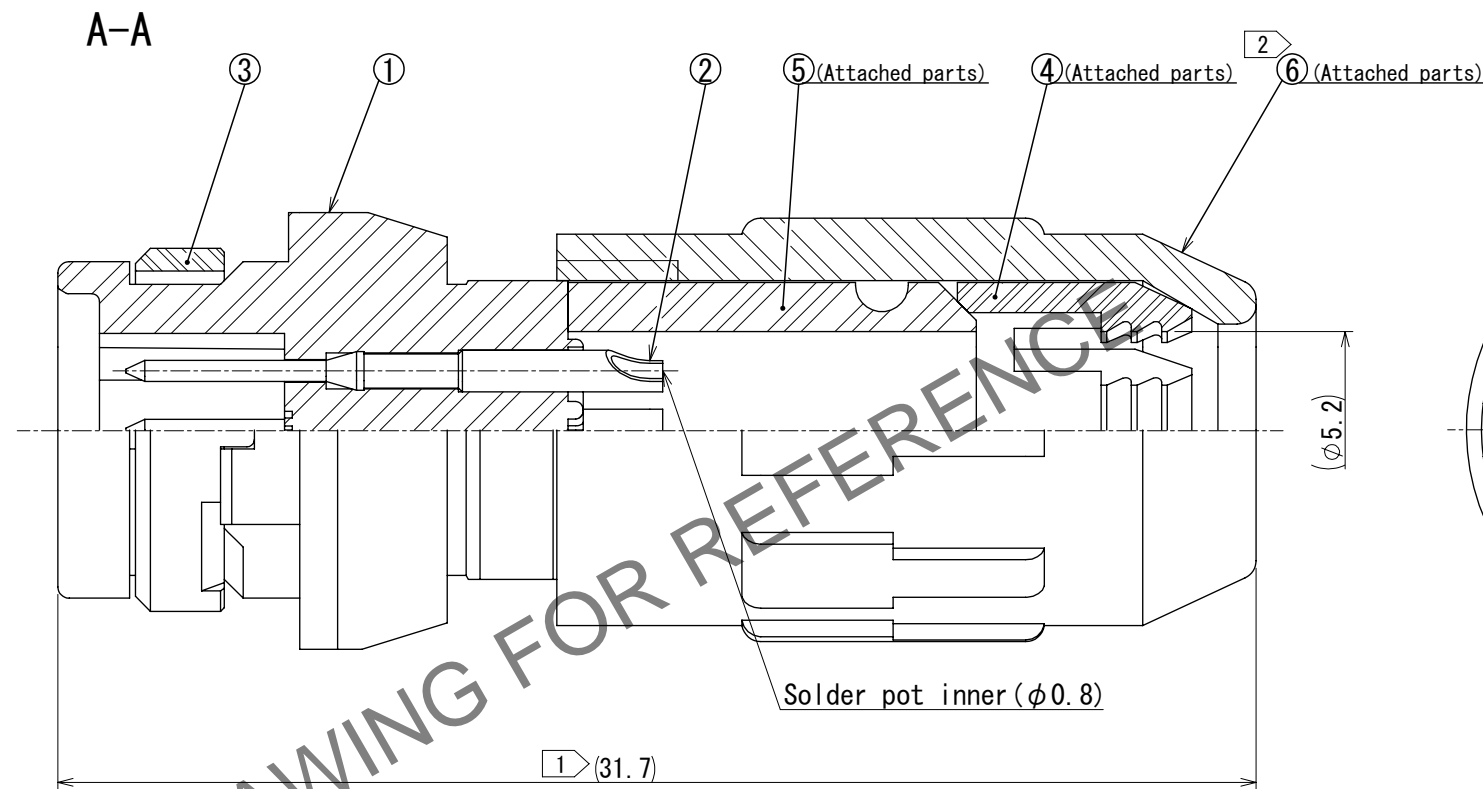


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

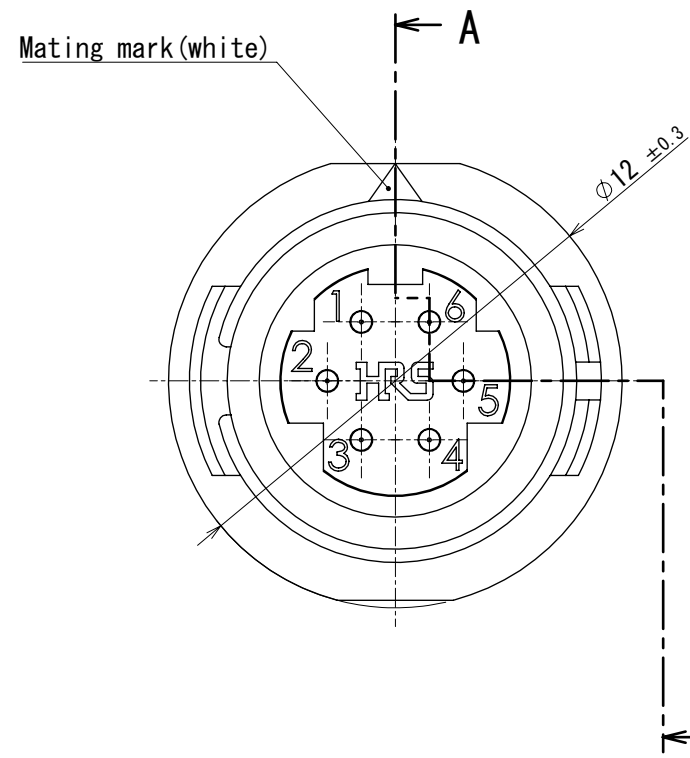

- Notes
- 1 Total length becomes  $28.8 \pm 1$  when Ref.No. 6 is screwed into Ref.No. 1 completely.
  - 2 The recommended clump torque of Ref.No. 6 to be  $0.45 \sim 0.5 \text{ N} \cdot \text{m}$ .  
To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).  
Spacer for assembly is available HR30-6P-T02.
  - 3 Table for assembly and soldering is available HR30-6R-6P-T01.
  - 4 Surface plating : gold plating  $0.2 \mu\text{m}$  min.  
Under plating : nickel plating  $2 \mu\text{m}$  min.
  - 5 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.  
Please confirm before the use.
  - 6 The assembly this product applies to the manual ETAD-C0476-00.

3 CAD change

3	PPS	(Black) UL94V-0	6	PBT	(Black) UL94V-0
2	Brass	4	5	CR	(Black)
1	PPS	(Black) UL94V-0	4	Polyacetal	(Natural:Milky white) 3
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00014690	DESIGNED HY. KISHI
		APPROVED : HY. KOBAYASHI	2018. 02. 26	DRAWING NO.	EDC-112103-31-00
		CHECKED : HY. KOBAYASHI	2018. 02. 26	PART NO.	HR30-6J-6P (31)
		DESIGNED : DS. MATSUNE	2018. 02. 26	CODE NO.	CL0130-2009-6-31
		DRAWN : DS. MATSUNE	2018. 02. 26		
					DATE 2023. 08. 29