
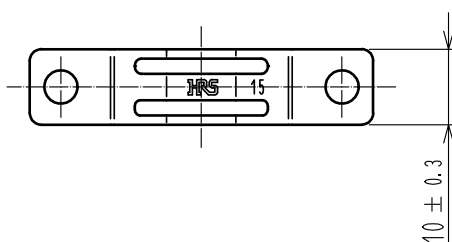
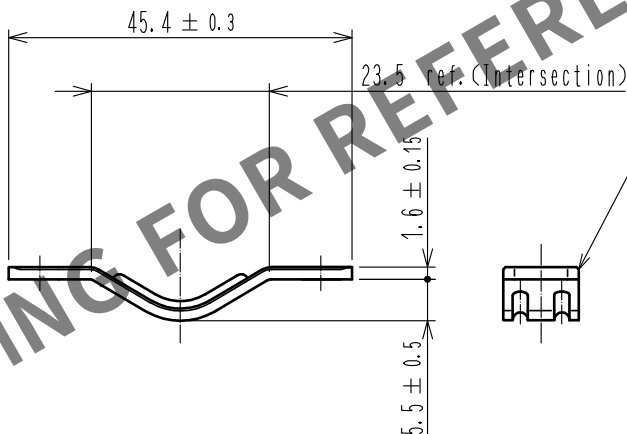
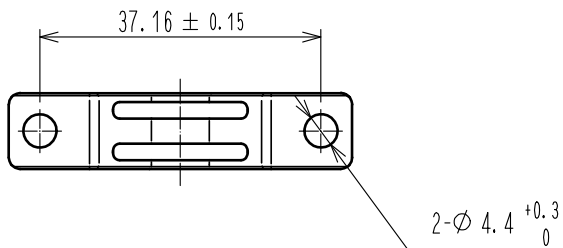



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

2 Attachment

JIS B 1188 : Cross recessed need screws with captive washer
M4×0.7×12



- Note 1. Refer to ETAD-E 2925 for the applicable components assembled with this product.
2. This product is available 1 pcs. of rft. No. ① in one pack and 2 pcs. of rft. No. ② in one pack.

1	Steel	Surface plating : Nickel 3μm min Under plating : Copper 2μm min			2	Steel	Surface plating : Nickel 2μm min Under plating : Copper 3μm min											
NO.		MATERIAL		FINISH . REMARKS			NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 1 : 1				COUNT		DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED		NM. NISHIMATSU		17. 01. 25		DRAWING NO.		EDC-126919-01-00						
				CHECKED		NM. NISHIMATSU		17. 01. 25		PART NO.		PQ-CM<15. 0><01>						
				DESIGNED		MO. SHIMOYAMA		17. 01. 25		CODE NO.		CL236-2005-1-01						
				DRAWN		JY. IGA		17. 01. 25				1		1				