
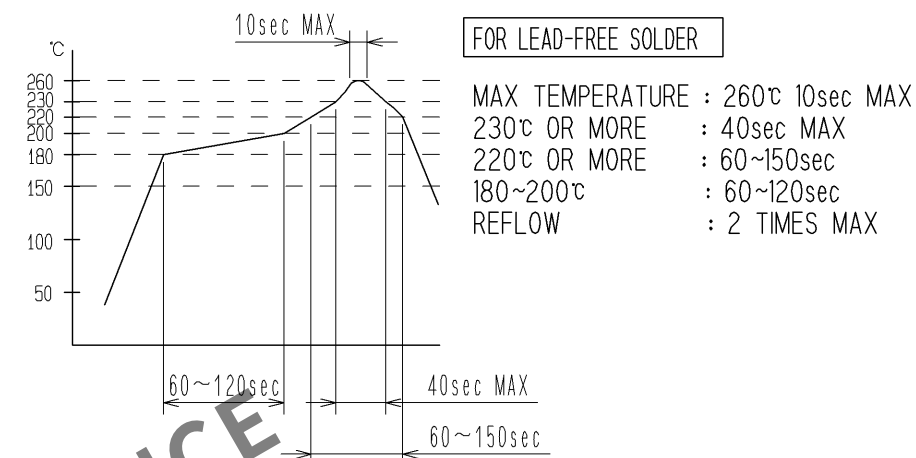
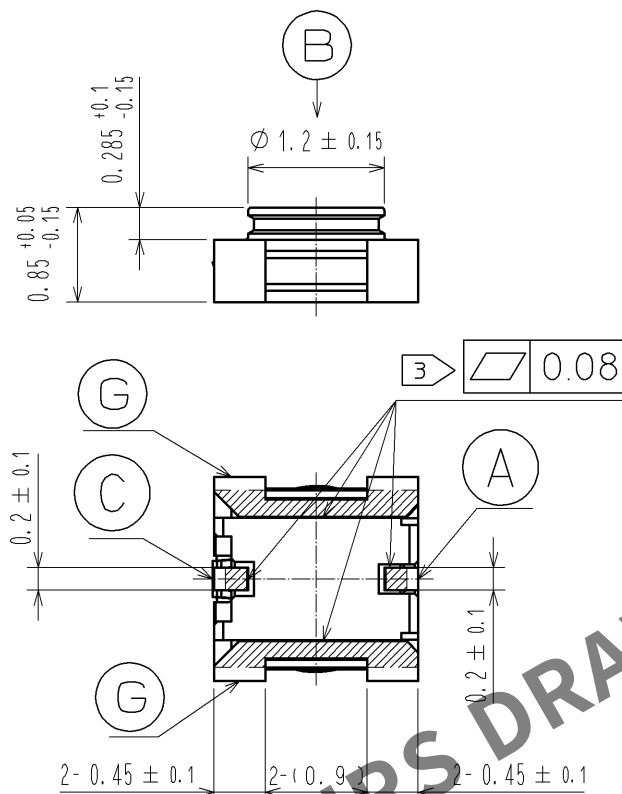




MS-18C





-
- Figure 1: Schematic diagram of the layout of the contact grid. The diagram shows a 3x3 grid of contact pads. Dimensions are given in millimeters. The overall width is 1.89 mm, composed of 0.25 mm, 1.39 mm, and 0.25 mm segments. The overall height is 1.9 mm, composed of 0.3 mm, 1.3 mm, and 0.3 mm segments. Individual contact pad dimensions are 0.8 mm by 0.25 mm. Spacing between pads is 0.275 mm horizontally and 0.3 mm vertically. A dashed line indicates the center of the grid. Labels 'CONTACT A' and 'CONTACT C' point to specific pads.

3	CU-NI-SI-ALLOY	SELECTIVE GOLD PLATING	7	PS	
2	LCP-M 		6	PS	
1	BRASS	SELECTIVE GOLD PLATING 	5	PS	
			4	CU-NI-SI-ALLOY	SELECTIVE GOLD PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

 HIROSE ELECTRIC CO., LTD.	UNITS mm		SCALE 15 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-J-001356	DESIGNED TS. NAKAGAWA	CHECKED NK. NINOMIYA	DATE 11. 09. 1
	APPROVED : KJ. KAWAMURA 08. 11. 08		DRAWING NO. EDC3-180771-00						
	CHCED : TY. OZAKI 08. 11. 07		PART NO. MS-180						
	DESIGNED : TS. NAKAGAWA 08. 11. 07		CODE NO. CL358-0265-7-00						
	DRAWN : TS. NAKAGAWA 08. 11. 07		 1/						


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKAGING SPECIFICATION (2:1)

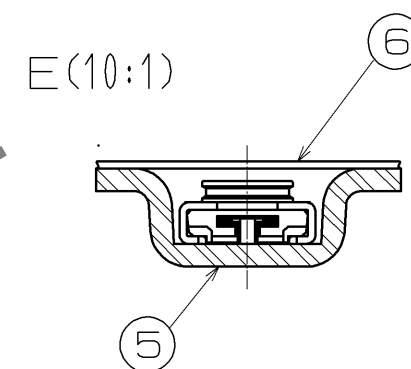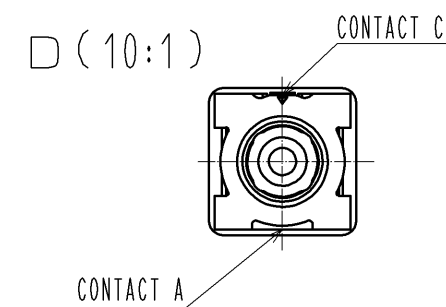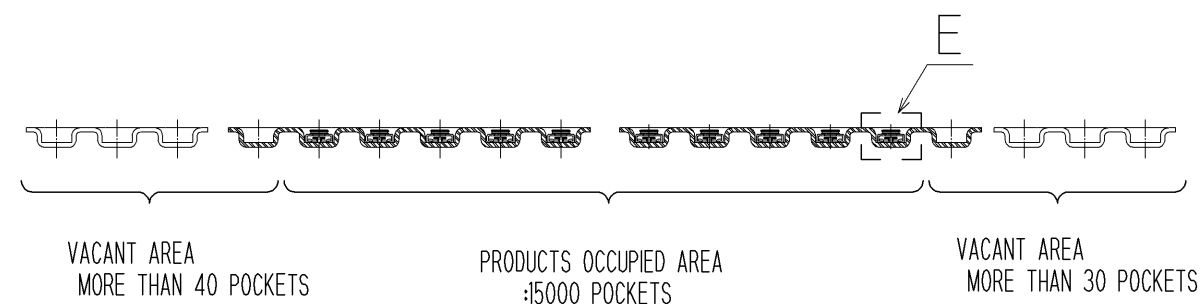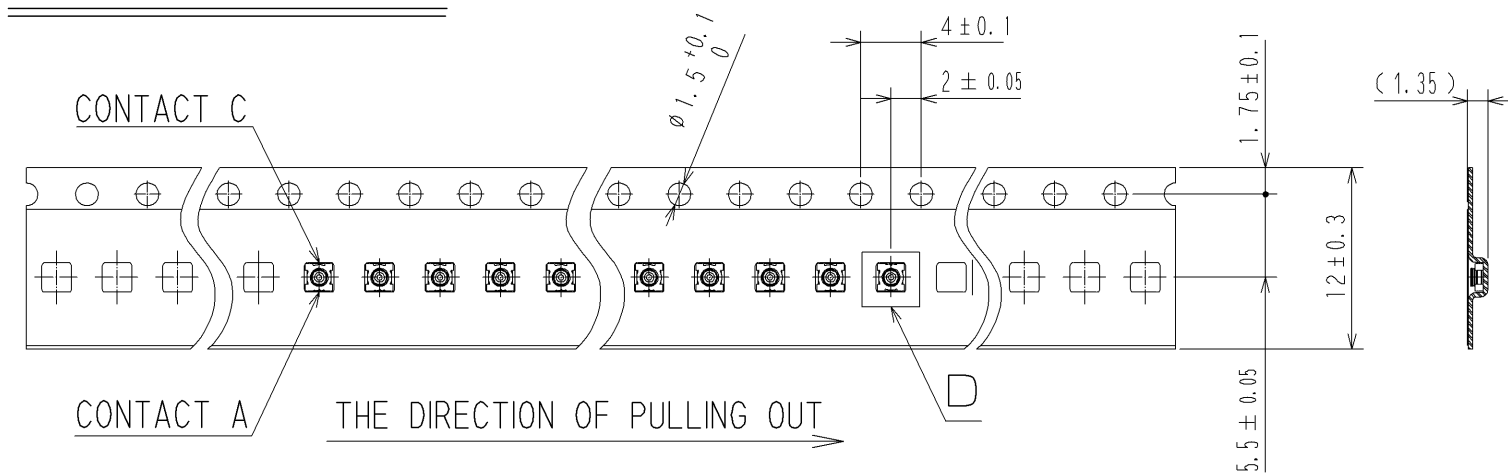


REEL DIMENSIONS(FREE)

15000 PIECES PER REEL

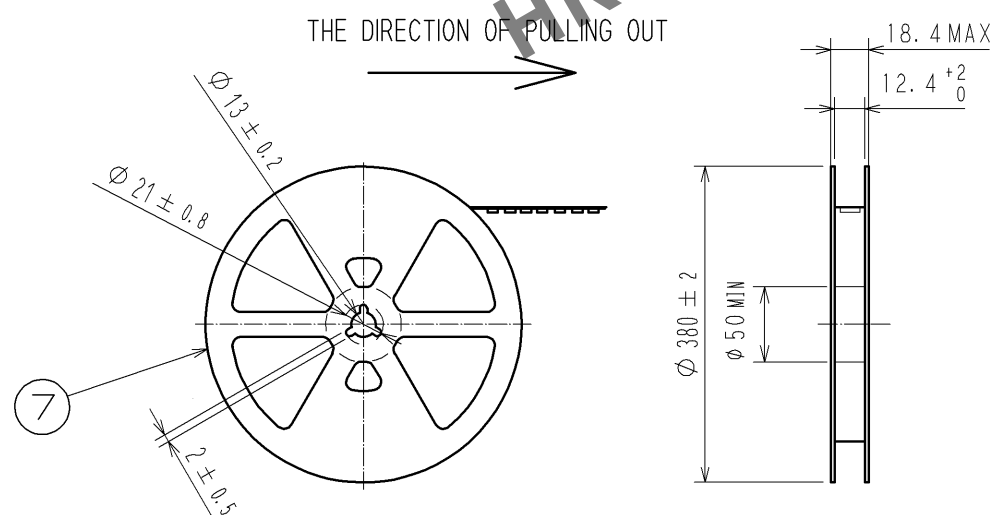

OUTER PACKAGING CASE(FREE)

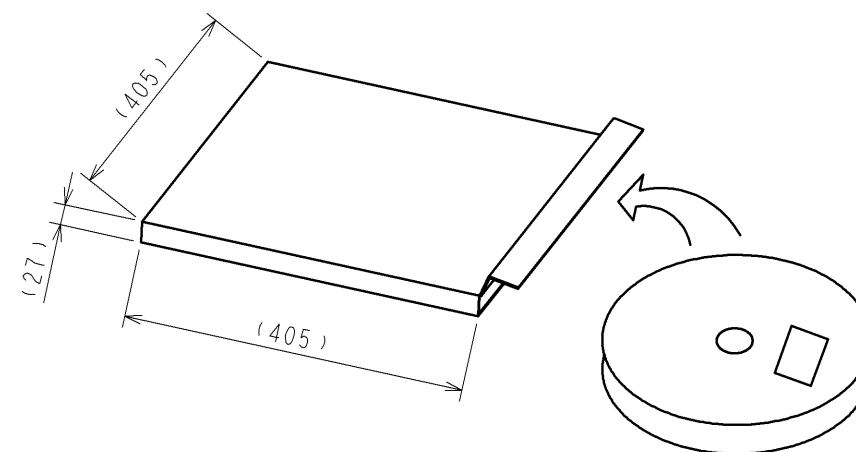

HRS

DRAWING NO.	EDC3-180771-00
PART NO.	MS-180
CODE NO.	CL358-0265-7-00

4 2 2