


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window

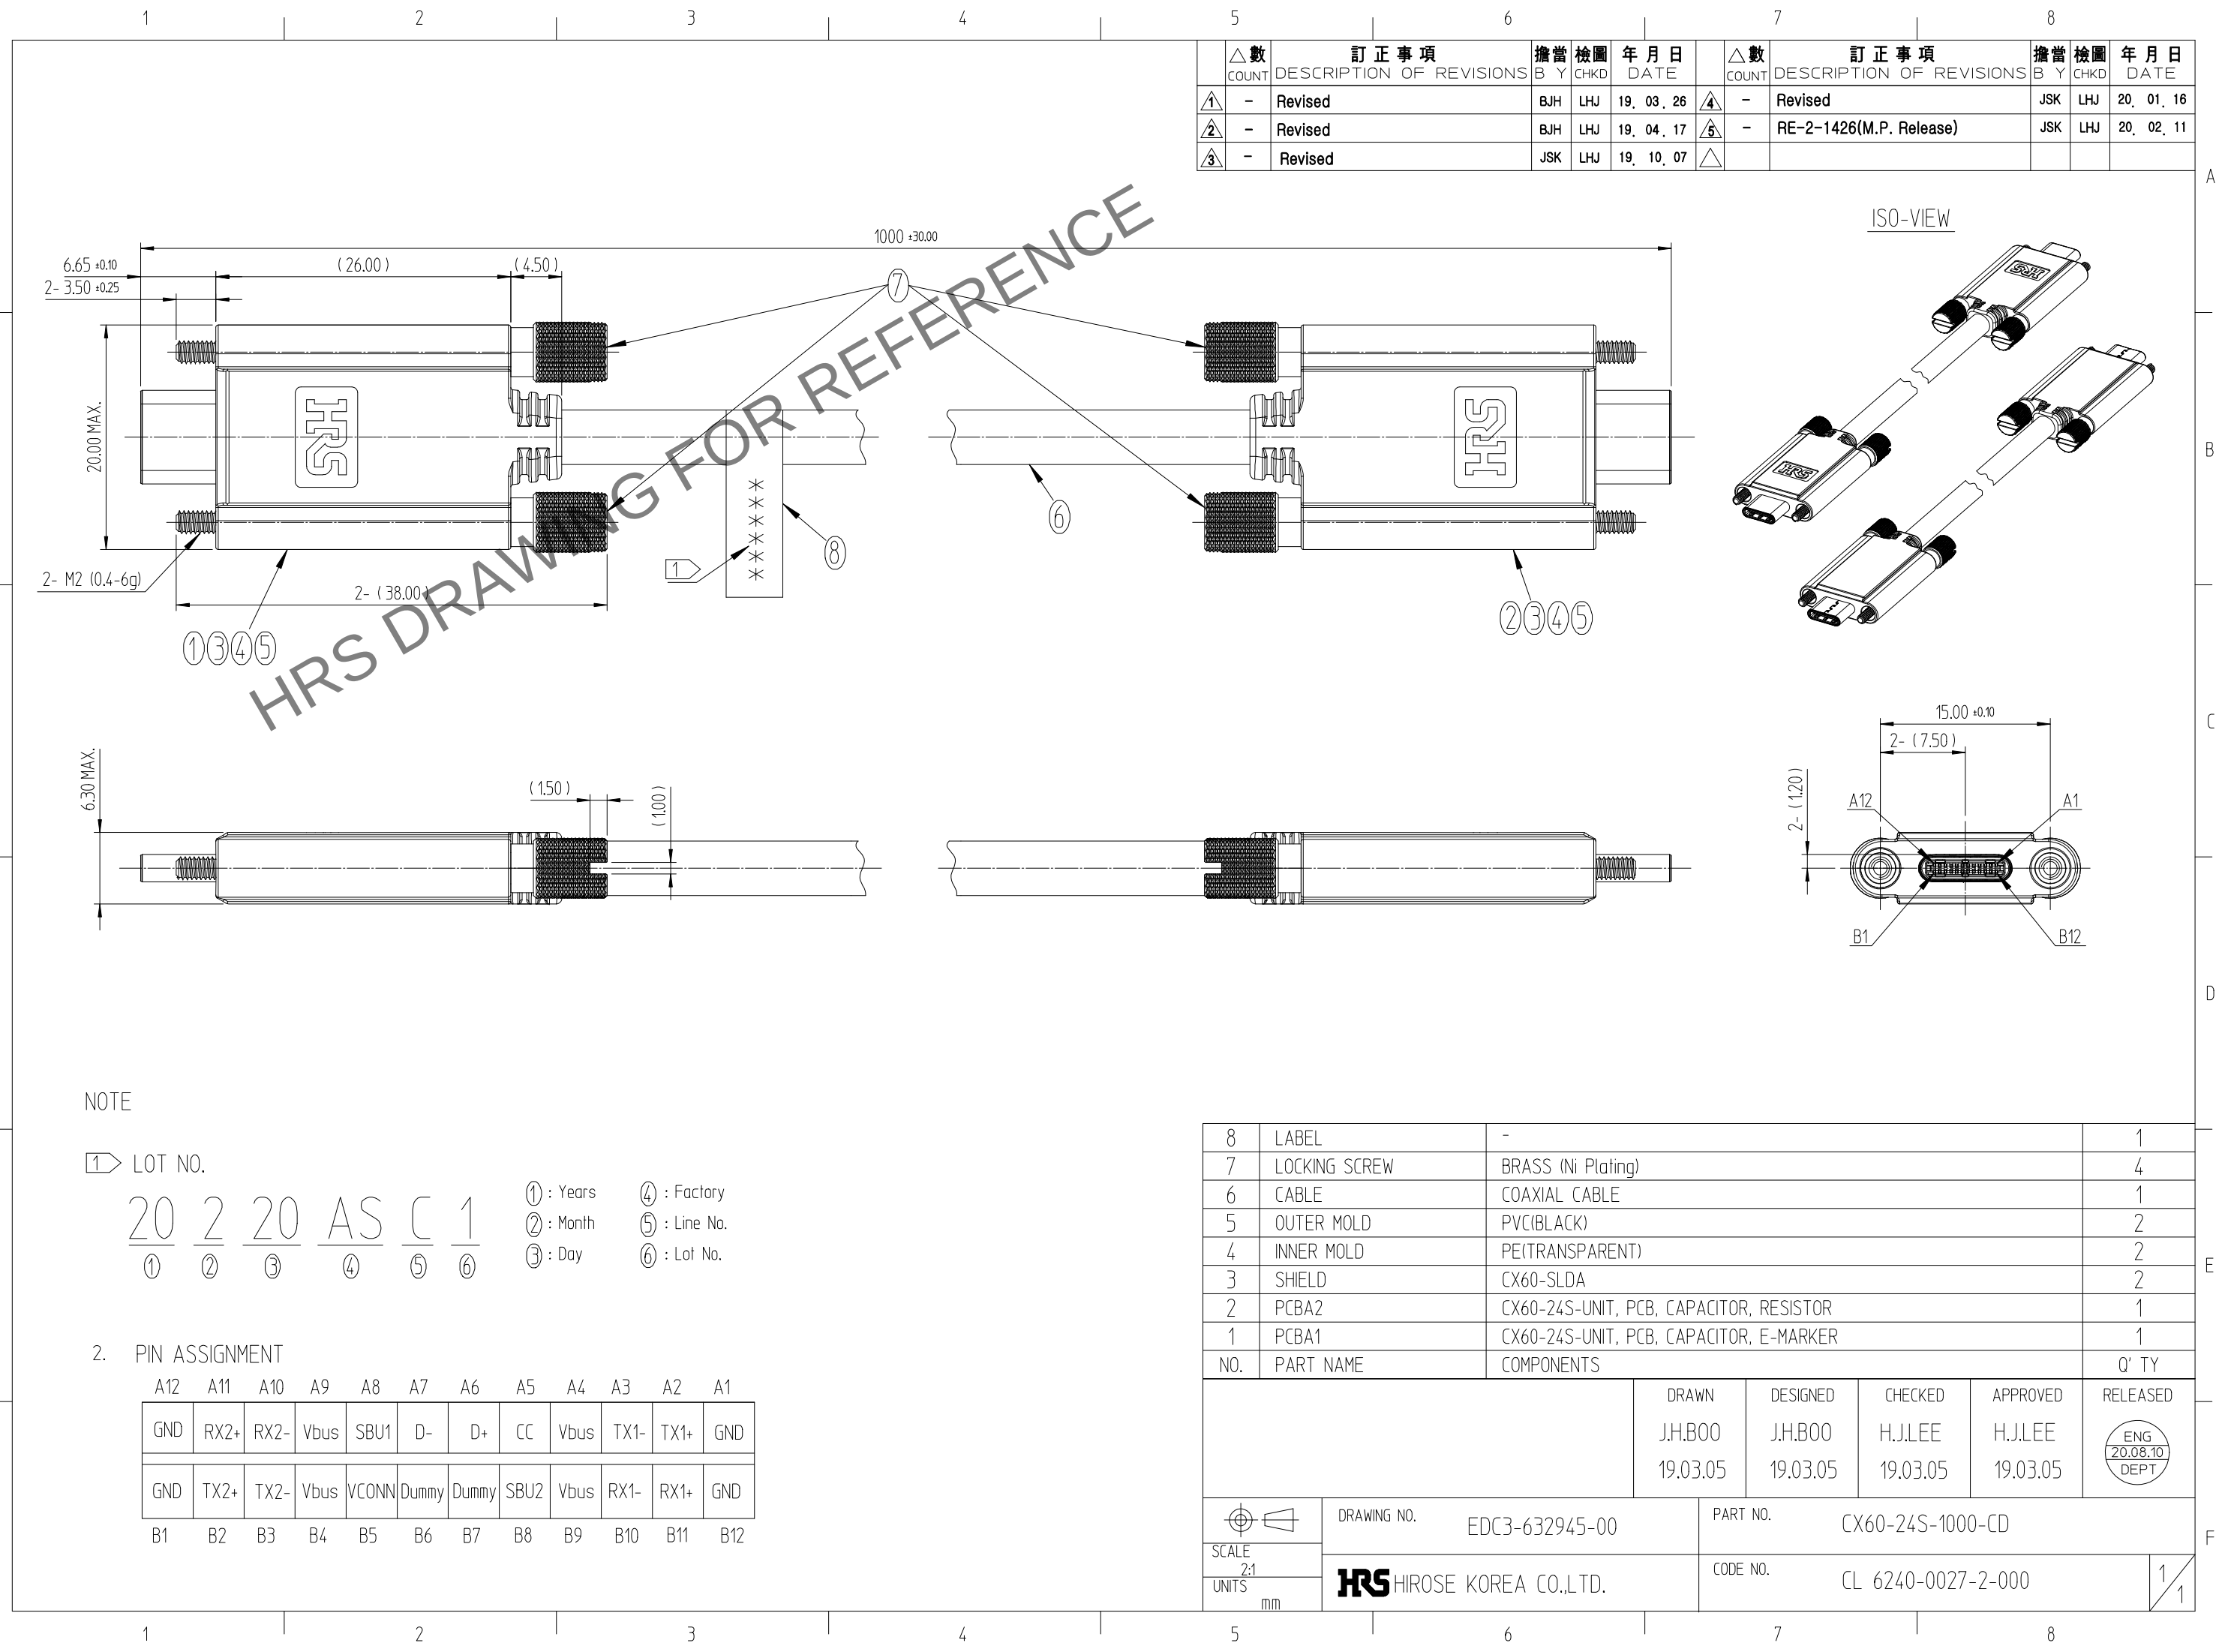

NOTE

1 LOT NO.

20 2 20 AS C 1
① ② ③ ④ ⑤ ⑥

① : Years ④ : Factory
② : Month ⑤ : Line No.
③ : Day ⑥ : Lot No.

2. PIN ASSIGNMENT

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
GND	TX2+	TX2-	Vbus	VCONN	Dummy	Dummy	SBU2	Vbus	RX1-	RX1+	GND

8	LABEL	-	1			
7	LOCKING SCREW	BRASS (Ni Plating)	4			
6	CABLE	COAXIAL CABLE	1			
5	OUTER MOLD	PVC(BLACK)	2			
4	INNER MOLD	PE(TRANSPARENT)	2			
3	SHIELD	CX60-SLDA	2			
2	PCBA2	CX60-24S-UNIT, PCB, CAPACITOR, RESISTOR	1			
1	PCBA1	CX60-24S-UNIT, PCB, CAPACITOR, E-MARKER	1			
NO.	PART NAME	COMPONENTS	Q' TY			
		DRAWN J.H.B00 19.03.05	DESIGNED J.H.B00 19.03.05	CHECKED H.J.LEE 19.03.05	APPROVED H.J.LEE 19.03.05	RELEASED ENG 20.08.10 DEPT
		DRAWING NO. EDC3-632945-00				
SCALE 2:1		PART NO. CX60-24S-1000-CD				
UNITS mm		CODE NO. CL 6240-0027-2-000				
 HIROSE KOREA CO.,LTD.		1/1				