


TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 1 OF 19

BM25 Series Guideline

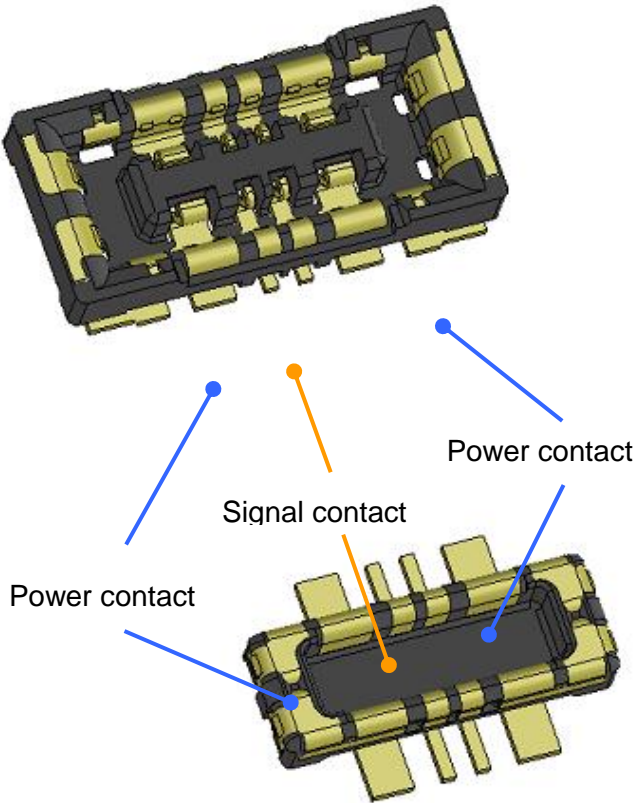

REVISIONS	Approver	WR.FUKUCHI	20210402
	Checker	TS.MIYAZAKI	20210402
	Designer	TY.MORISHITA	20210402
			RevNo 0
	Designer	Checker	Approver
			DATE

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 2 OF 19

Page Number

1. Notice for Device Designing .....	3
1-1 Notice for mechanical designing .....	3
1-1.a Disengaging prevention .....	3
1-1.b FPC FIXING .....	4
1-1.c Location of other components around connector .....	4
1-1.d Marking for mating position .....	4
1-2 Notice for PWB designing .....	5
1-2.a Recommended PWB pattern .....	6
1-2.b PWB pad layout and connector location .....	6
1-2.c PWB designing .....	7
1-2.d FPC designing .....	8
2. Notice for Mounting .....	10
2-1 Metal mask design .....	10
2-2 Reflow profile .....	11
2-3 Notice for .....	12
2-3.a Repairing condition .....	12
2-3.b Solder swelling .....	12
3 Notice for Connector Handling .....	
3-1 Connector insertion operation .....	13
3-2 Connector withdrawal operation .....	14
4 PWB for Evaluation test .....	15
4-1 Contact Resistance Measurement .....	15
4-2 Temperature Rise Test .....	16
5 Electrical inspection jig .....	17
5-1 Product name .....	17
5-2 Electric inspection jig summary .....	17
5-3 Arrangement of the electric inspection jig .....	18
5-4 Contact information of YOKOWO CO., LTD. ....	19

<b>TITLE:</b>	BM25 Series Guideline	<b>ETAD-H1018-00</b>
<b>PRODUCT:</b>	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	<b>PAGE:</b> 3 OF 19

# 1. Notice for Device Design

## 1.1 Notice for mechanical designing


### 1-1.a Disengagement prevention

#### Please use buffer material.

There is still possibility that connectors are disengaged if strong impact, such as dropping, is put against connectors in use. In order to prevent connectors from disengaging, please make sure to put buffer material between a connector and a cover case to hold down the connector pair to the mating direction.

If a connector is directly pressed down by a cover case, there is a possibility that the cover case is bent and it may cause connector disengagement when the device is dropped. Please avoid a design that the connector is directly pressed by cover case, instead, use put the buffer material to press down the connector.

Buffer material must be the size which is able to cover all over the connector mounting area.

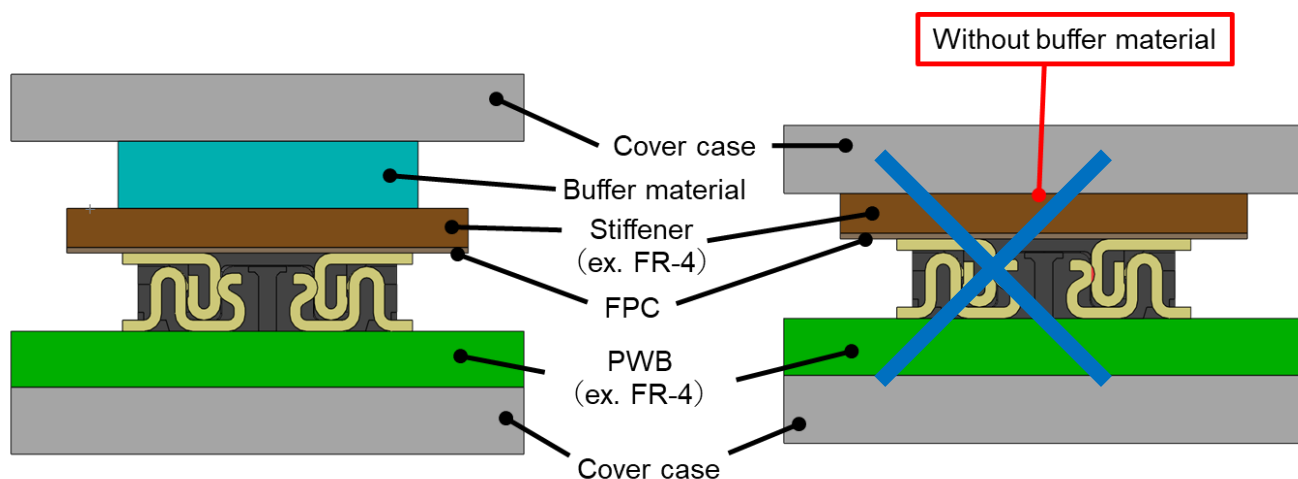


TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 4 OF 19

### 1-1.b FPC FIXING

**Do not completely fix the FPC position.**

If FPC position is fixed, connector will get direct stress from dropping impact.

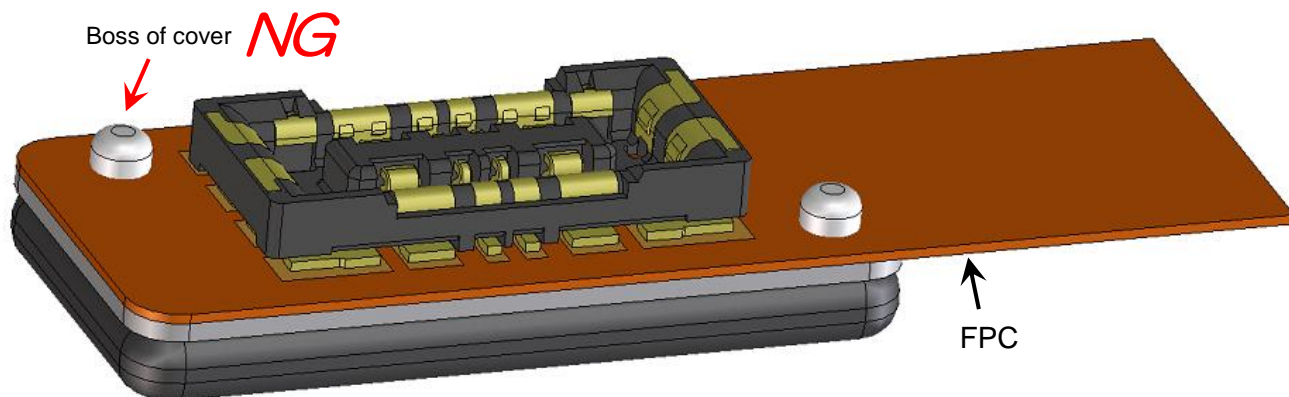

### 1-1.c Location of other components around connector

**Please do not locate any material which may affect on connector mating around the connectors.**


It may cause a misalignment or breakage.

### 1-1.d Marking for mating position

**Putting some marking to indicate the exact mating position is recommended.**

It can support smooth mating.

Marking for positioning

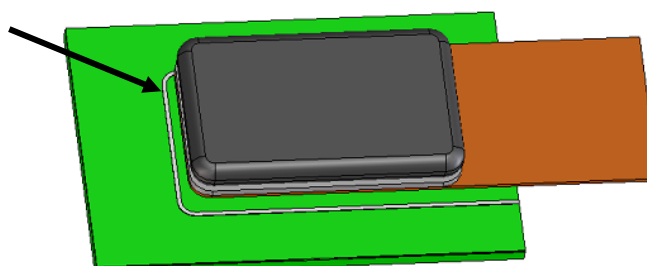

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 5 OF 19

1.2 Notice for PWB designing

1-2.a Recommended PWB pattern

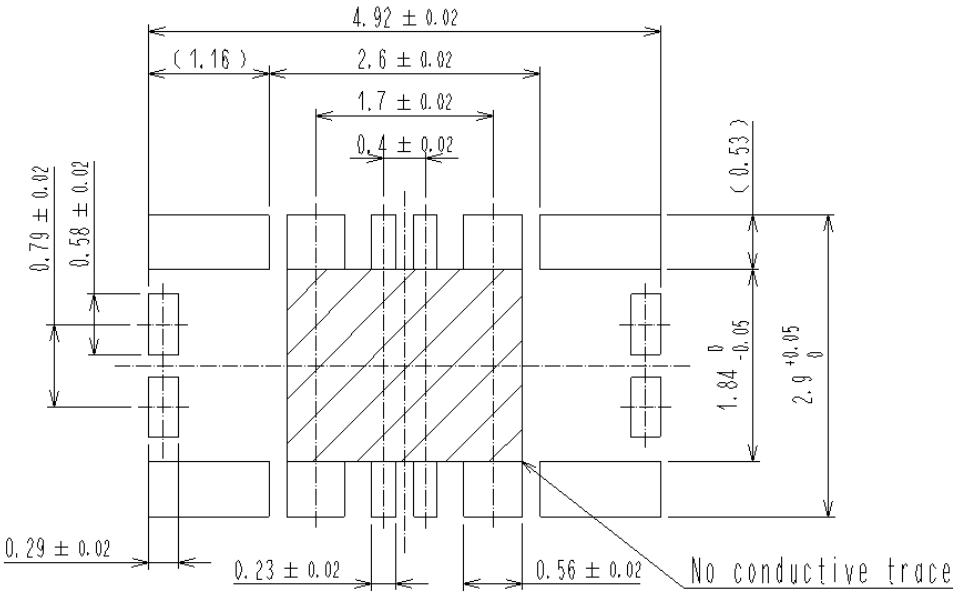


Fig 1-2.a(1) Receptacle (BM25-4S/2-V) Recommended PWB layout

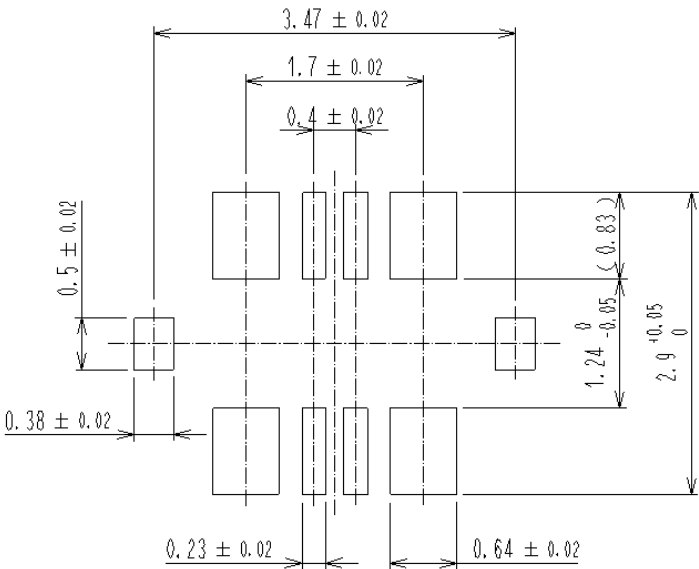


Fig 1-2.a(2) Plug (BM25-4P/2-V) Recommended PWB layout

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 6 OF 19

1-2.b PWB pad layout and connector location

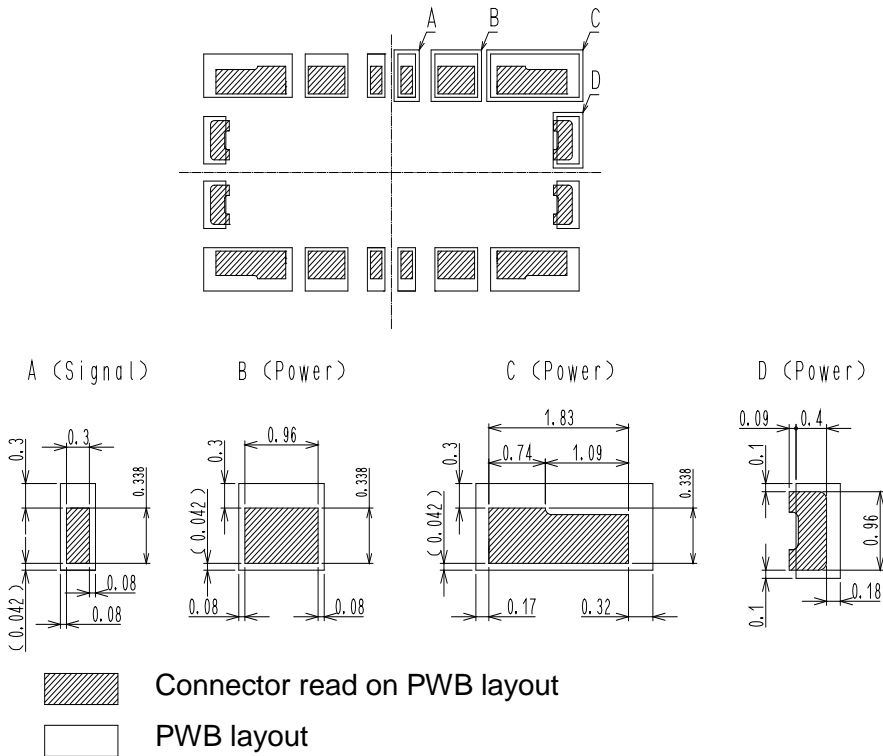


Fig 1-2.b(1) Receptacle Positioning

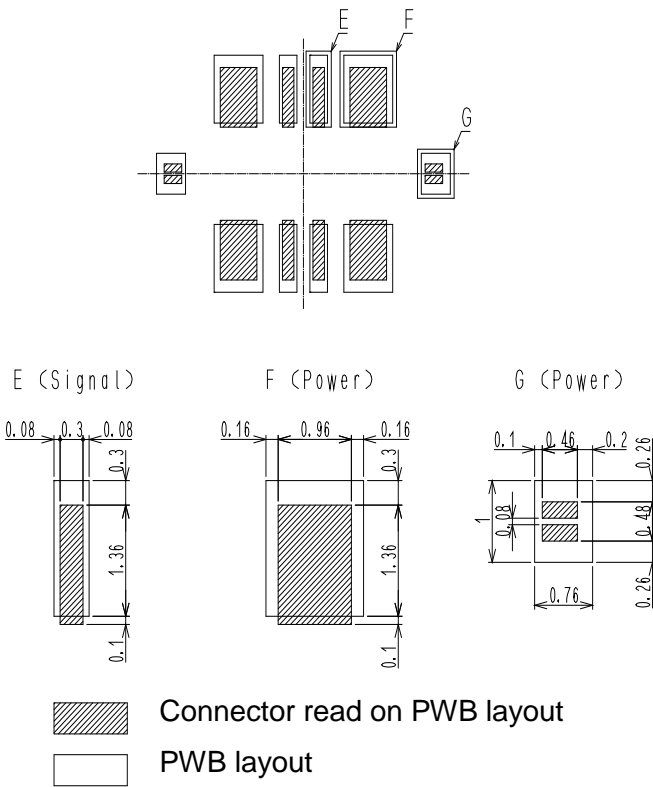



Fig 1-2.b(2) Plug Position

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 7 OF 19

1-2.c Notice for PWB design


- Recommended PWB pattern width is 1mm ([Copper foil](#) thickness=35μm) /1A

PWB Specifications for temperature rise evaluations are as follows.

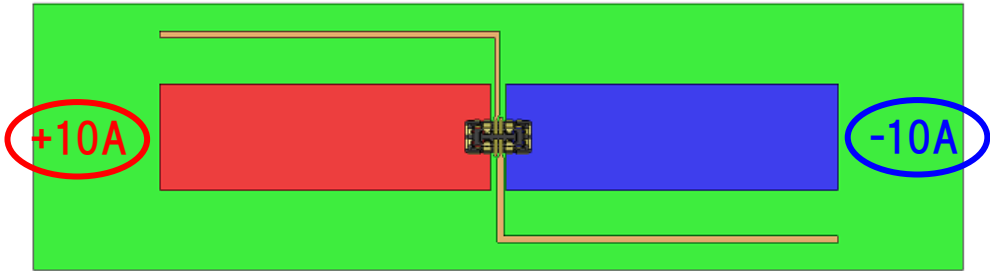


1-2c(1) PWB for [temperature rise evaluations](#) of receptacle

[Material](#) : FR-4  
PAD : Recommended pattern  
Recommended Power contact  
pattern width : 10mm  
Recommended [Signal](#) contact  
pattern width : 0.3mm  
[Copper foil](#) thickness : 35 μm  
PWB size 70×20×0.8mm

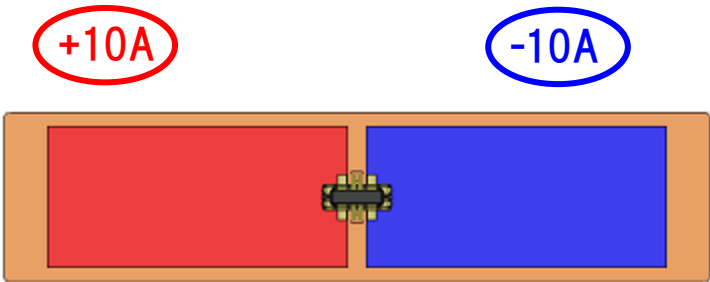

1-2c(2) PWB for [temperature rise evaluations](#) of plug


[Material](#) : [polyimide](#) (single layer)  
stiffener : FR-4  
PAD : Recommended pattern  
Recommended Power contact pattern  
width : 10mm  
Recommended [Signal](#) contact pattern  
width : 0.3mm  
[Copper foil](#) thickness : 35 μm  
PWB size : 38×11×0.435mm  
\*including stiffener thickness  
Stiffener size : 7×11×0.3mm

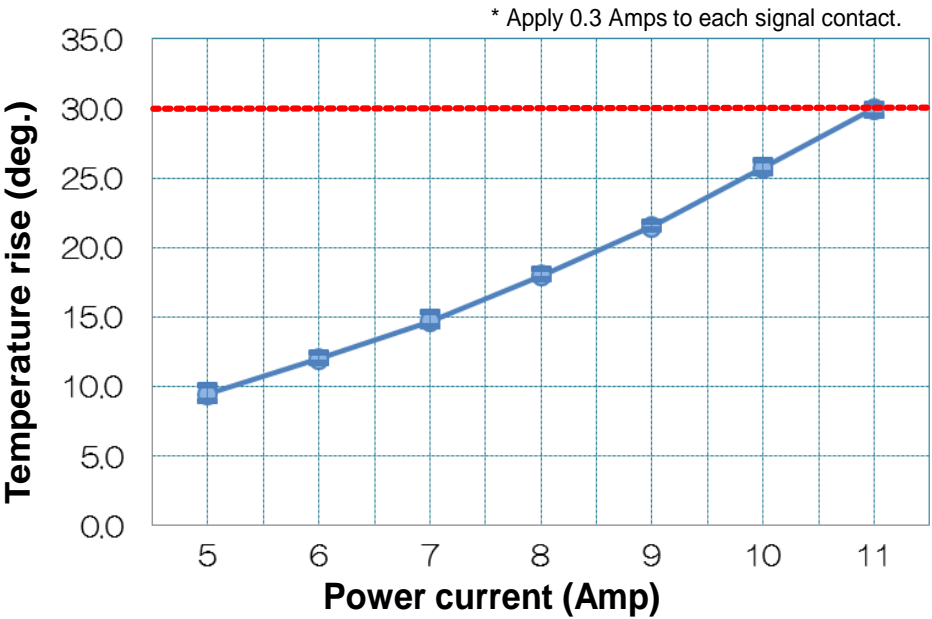

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 8 OF 19

• **Please design circuit of power supply pad without splitting current flow**

Electric current might be concentrated in a certain circuit and cause over current

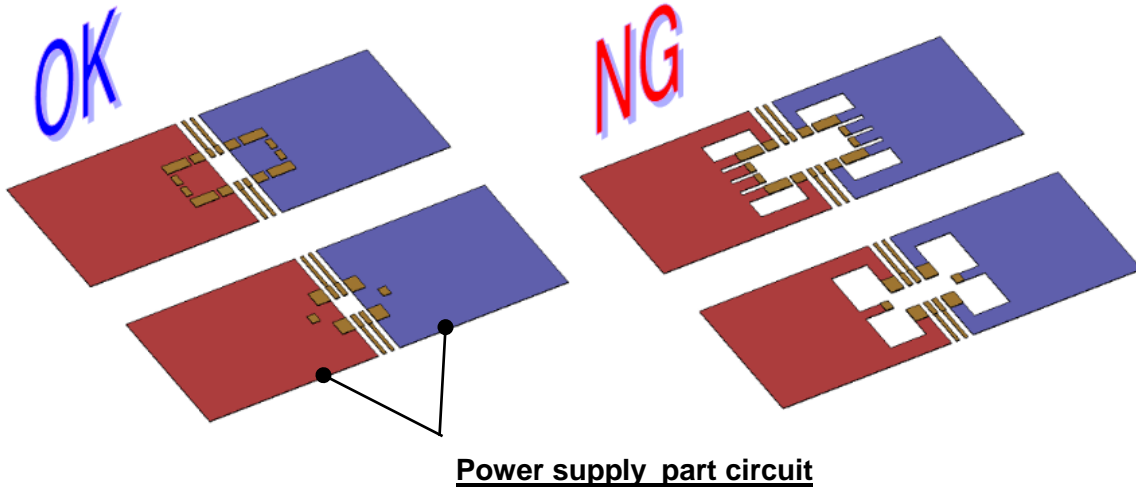


• **Please design PWB layout properly so that fillet are properly formed.**

The recommended PWB layout is designed so that the connector can be soldered to the PWB.

• **Please comply with our recommended inner side of PWB pattern of receptacle**

It may cause solder wicking.

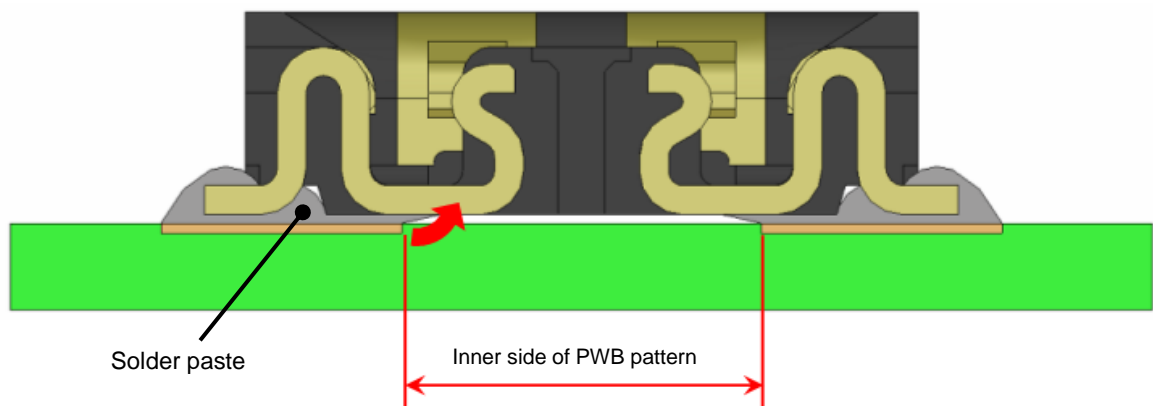

• **Please note pattern and the height of VIA hole.**

In case there's PWB pattern or VIA HOLE with too much height underneath the onnector, there is a possibility to cause soldering failure.





HIROSE ELECTRIC CO.,LTD

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 9 OF 19

1-2.d FPC design

- Please make sure to put a stiffener on the backside of the FPC.

It may cause the connector to peel-off or break.


【note】 If using a thinner stiffener than our recommendation,  
please contact and discuss with your Hirose contact window.

Recommended stiffener  
F R - 4 : t=0.3mm MIN  
SUS : t=0.2mm MIN


- When mounting the connector, please consider the bending of FPC by heating,  
and use FPC with low risk of bending.

It may cause bending when heating.

- Please design the FPC to have a flexibility to absorb the displacement of the connector  
cased by fixing PWB and battery.

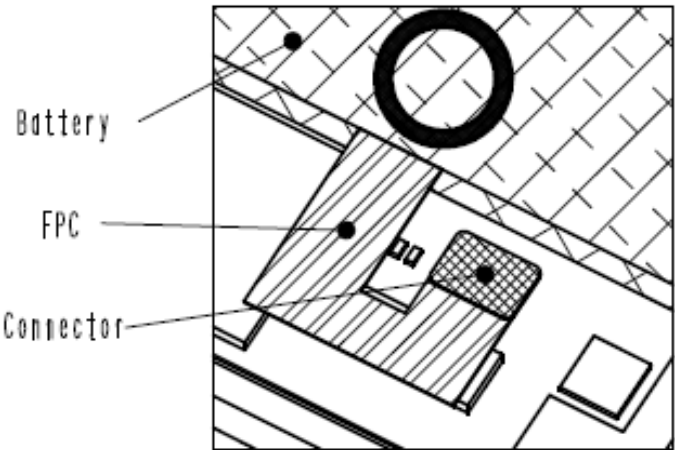


Recommended FPC Routing

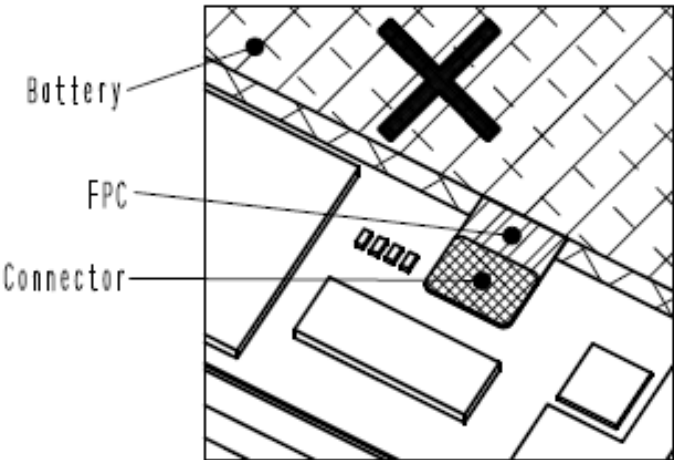

Unrecommended FPC Routing  
(Too short, not winding)

## 2. Notice for Mounting

**Make sure the latest specification when designing.**



Recommended stencil  
thickness : 0.10mm  
Open ratio :  
Signal contact:100%  
Power contact:70%

**Fig 2-1.(2) Recommended stencil layout of plug (BM25-4P/2-V)**


【note】 Please refer to “Solder paste swelling” on page 10.



HIROSE ELECTRIC CO.,LTD

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 11 OF 19

## 2-2 Reflow profile

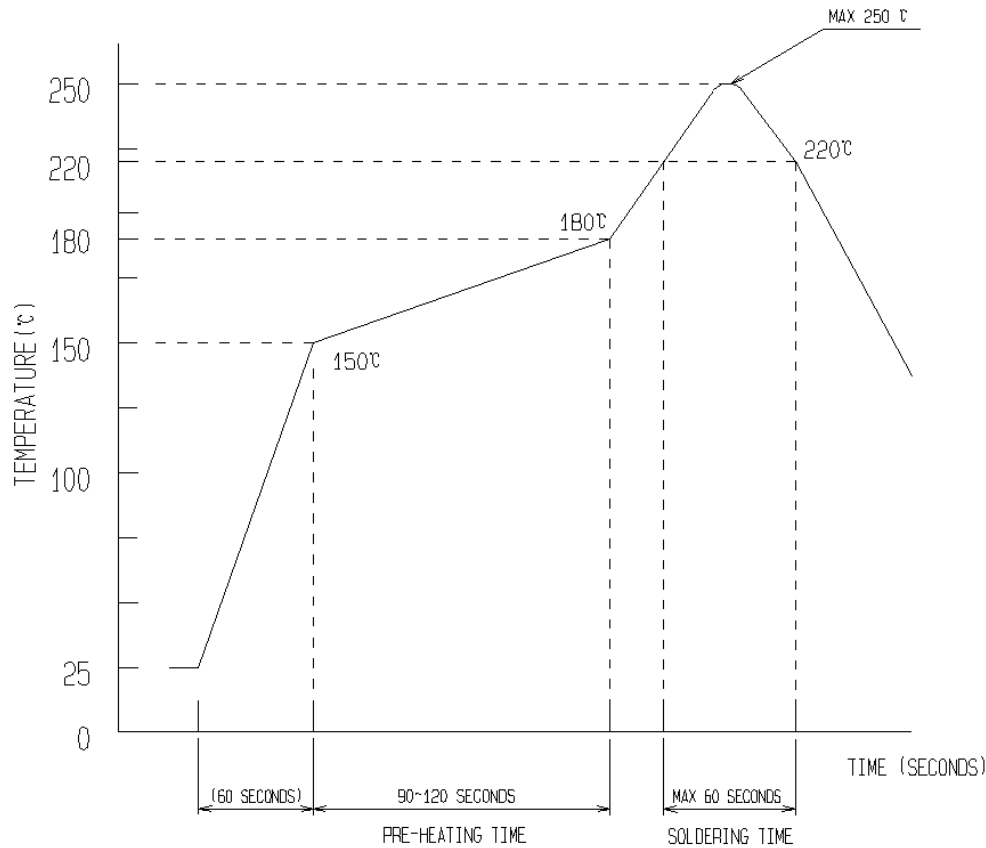

**Fig. 2-2 Recommended reflow profile**

- Profile measurement point  
The temperature profile indicates the board surface temperature at the point of contacts with the connector terminals.
- Reflow cycles  
Up to 2 cycles of reflow soldering are possible under the same conditions.  
\*Temperature between 1st and 2nd reflow must be cooled down to room temperature.
- Reflow heating method and condition  
Far-infrared heater and hot convective blowers used in combination, normal atmosphere, or nitrogen atmosphere
- Notifications for N<sub>2</sub> reflow  
Please set O<sub>2</sub> concentration more than 1000[ppm] (HRS recommendation) in SMT  
Please feel free to contact us when it is less than 1000[ppm].

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 12 OF 19

2-3 Repair Condition

2-3.a Repair Condition

Receptacle



Repairing condition:  
·Soldering iron 350° C, 3seconds  
MAX  
Notice:  
·Please do not put stress on  
contacts.

Plug

Repairing condition:  
·Soldering iron 350° C, 3seconds  
MAX  
Notice:  
·Please do not put stress on  
contacts.  
·Please do not touch housing with a  
soldering iron.

2-3.b Solder swelling

- Please keep the soldering paste height less than 0.02 mm.  
It may effect on the board to board distance.

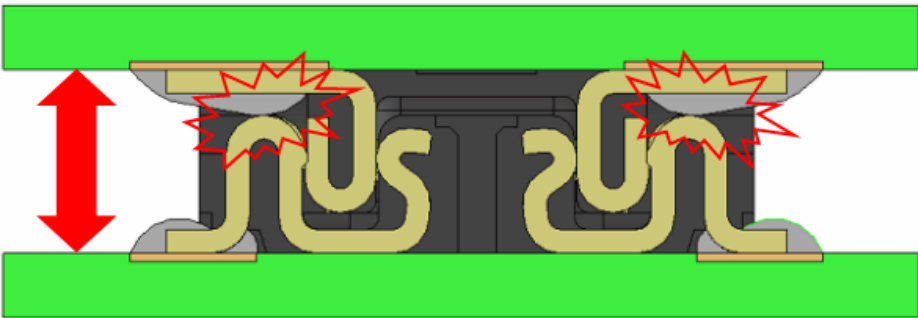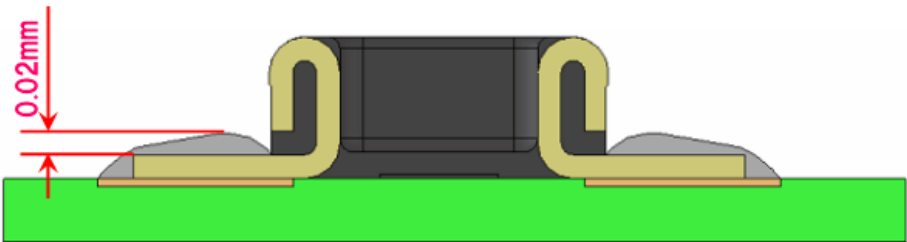

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 13 OF 19

### 3. Notice for Connector Handling


#### 3-1 Connector insertion operation

Please mate BM25 connectors by hand

Manual for inserting operation

- 1) Find the alignment area with hand to locate the connector in the appropriate mating position.


BM25 Series have guidance ribs on receptacle side for smooth mating.  
Put the connector on these ribs so that they can be self-aligned.

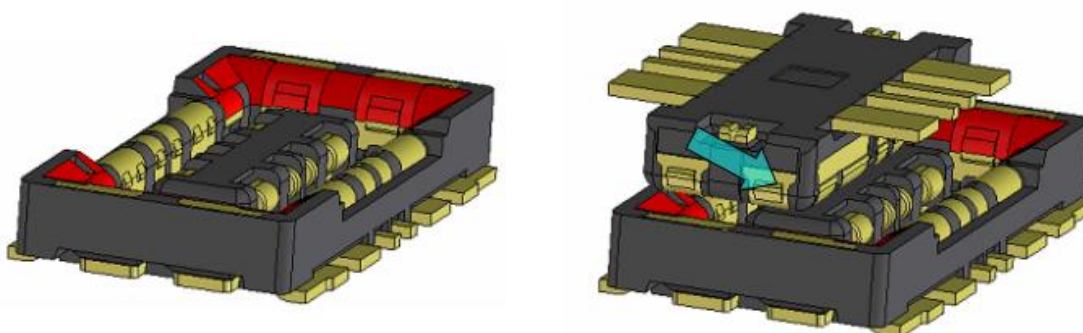

- 2) When the connector comes to the appropriate position, the connector comes into the aligned position.

If the connector comes into aligned position, it can be recognized by hand that the connector goes down one level.

Find the appropriate position  
moving the connector back and

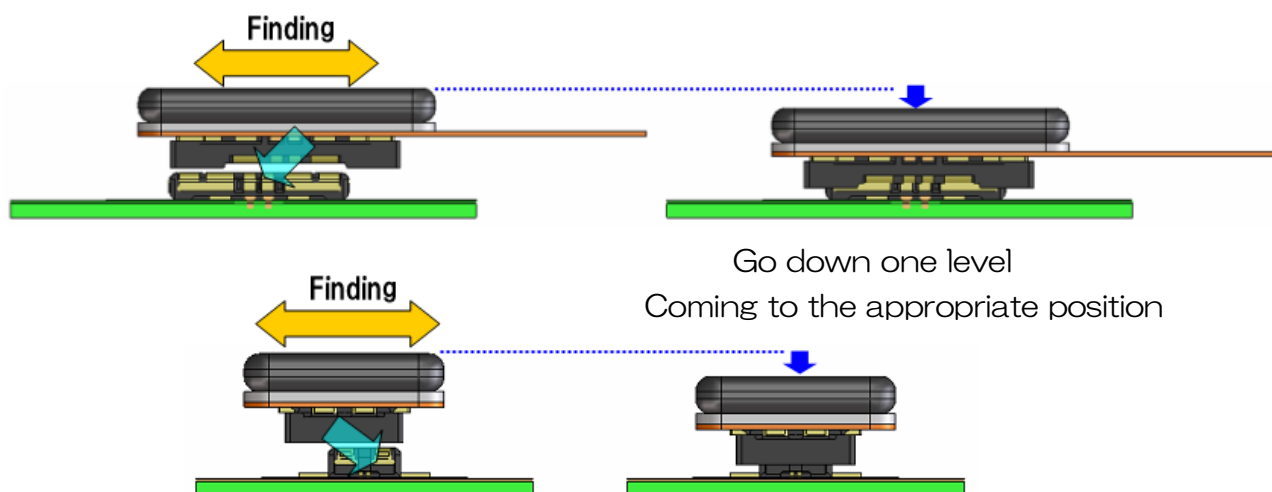

- 3) Mate when the connectors are in alignment position

When the connectors are in alignment position, the connector pair cannot be moved back and forth and around as they are mated in a parallel position.

- 4) Please make sure connectors are mated completely.

If one side is floating or the connectors are mated at a slant, please unmate once, and then mate them once again, following the procedures above from the beginning.

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 14 OF 19

### 3-2 Connector withdrawing operation


#### 1) Vertical Direction

It may be difficult to unmate from vertical direction due to FPC thickness or large pin count.




#### 2) Extraction from length direction

Please unmate the connector lifting one side of it diagonally against the contact pitch direction.

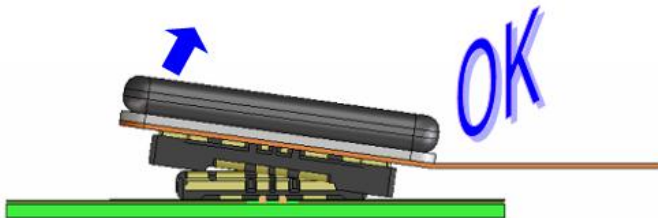


#### 3) Extraction from width direction

When removing from width side, please pull the edge of FPC board for vertical direction. Please avoid withdrawing the connector from width side. It may damage the contacts.

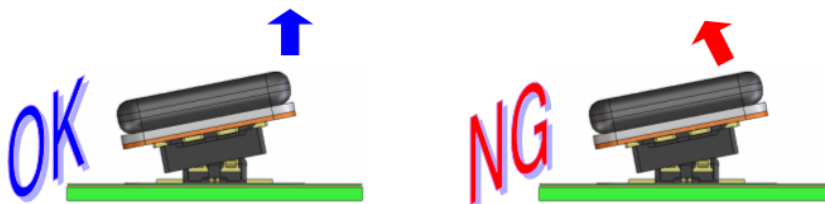

#### 4) If the FPC is not strong enough, conduct the test on FPC to repeat operation.

If FPC is not strong enough, there is a possibility that contacts may be pulled off or broken. Please make sure to conduct the test on FPC to repeat operation several times in an early stage build.

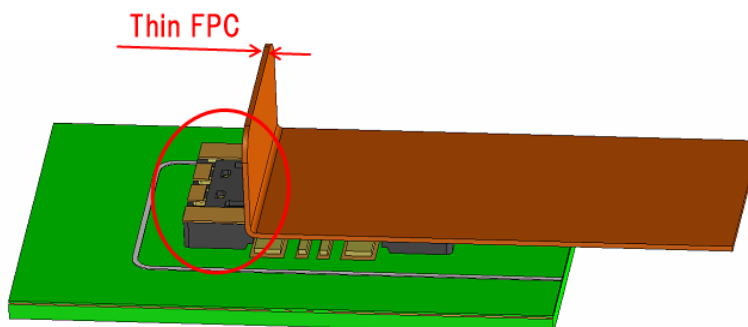




HIROSE ELECTRIC CO.,LTD

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 15 OF 19

4. PWB for Evaluation test


4-1 Contact Resistance Measurement

◆PWB for Plug (PWB)

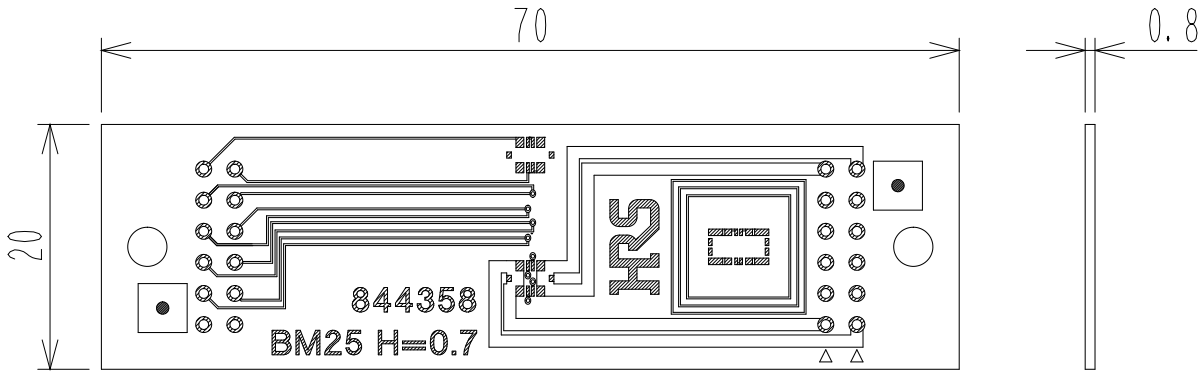

Copper foil thickness : 35μm

◆PWB for Receptacle (FPC)

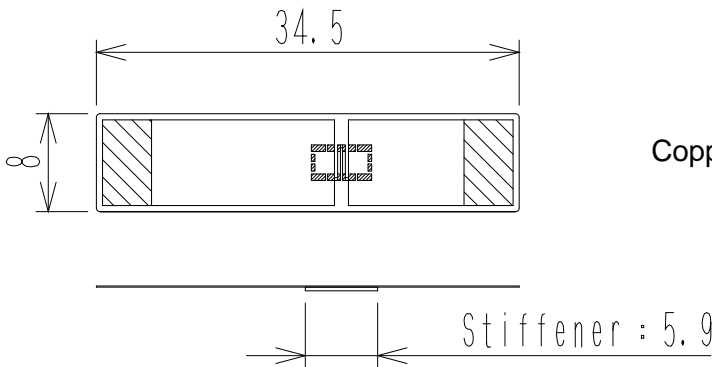

Copper foil thickness : 35μm

FPC Material Configuration

[ μm ]		
Layer	Material	Thickness
Resist	Ink	15
Cu foil		35
Adhesive		20
Base film	Polimide	25
Adhesive	Thermoplastic adhesive	30~40
Stiffener	FR-4	300
	SUS	200
Total		325~435




HIROSE ELECTRIC CO.,LTD


TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 16 OF 19

4-2 Temperature Rising Test

◆PWB for Receptacle (PWB)

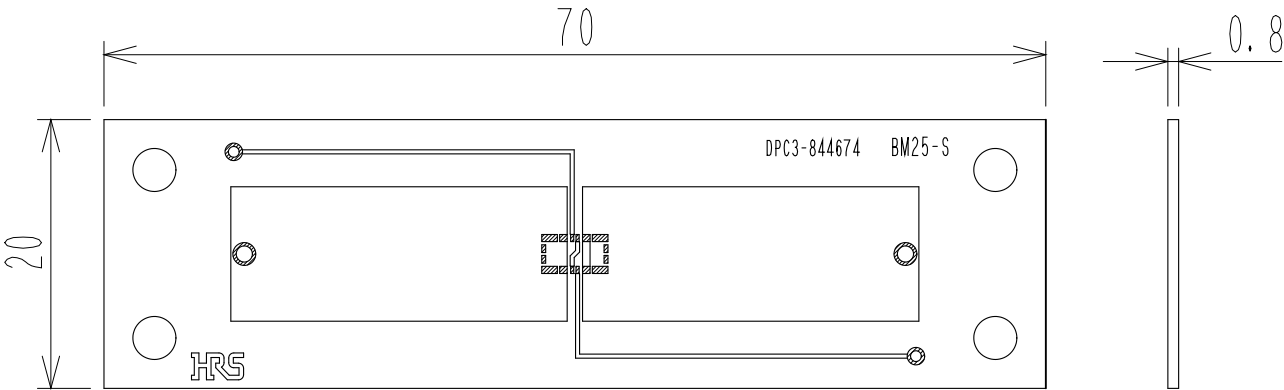

◆PWB for Plug (FPC)

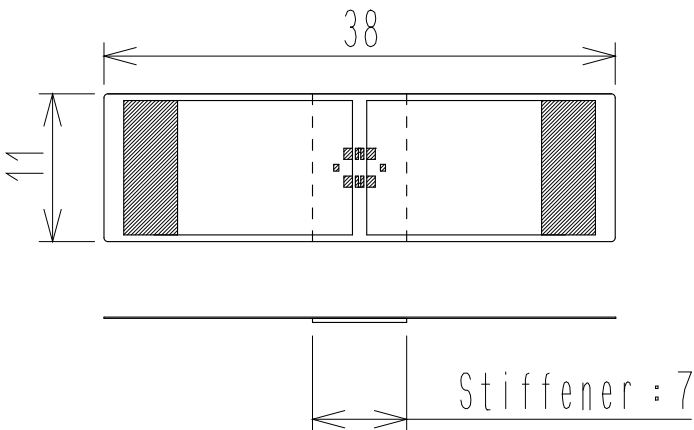

[Material](#) : FR-4  
PAD : Recommended pattern  
Recommended Power terminal : 10mm  
Recommended [Signal terminal](#) : 0.3mm  
[Copper foil](#) thickness : 35μm  
PWB size 70x20x0.8mm

[Material](#) : [polyimide \(stratum\)](#)  
[reinforcing plate](#) : FR-4  
PAD : Recommended pattern  
Recommended Power terminal : 10mm  
Recommended [Signal terminal](#) : 0.3mm  
[Copper foil](#) thickness : 35μm  
PWB size : 38x11x0.435mm  
\*include reinforcement board pressure  
[reinforcing plate](#) size : 7x11x0.3mm



TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 17 OF 19

## 5. PWB for Evaluation test

About electric inspection of the connector. We recommend test connector made by YOKOWO CO.LTD.  
(URL <http://www.yokowods.co.jp>)


### 5-1 Product name

<u>Connector product name</u>	Inspection tool by YOKOWO
BM25-4P/2-V(**)	BM25-04P-type of wiring(Plug 4P)
BM25-4S/2-V(**)	BM25-04S-type of wiring(Receptacle 4P)


### 5-2 Inspection jig summary

It is the inspection tool which can easily inspect the connector which implemented to an FPC.

◆Normal Usage(Using the Presser Lever)

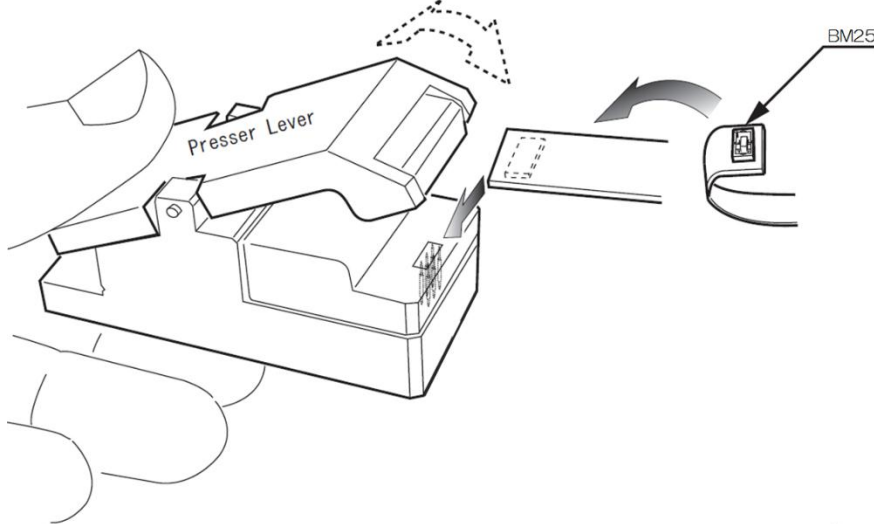

◆Remove the Presser Lever and Pressing with a finger

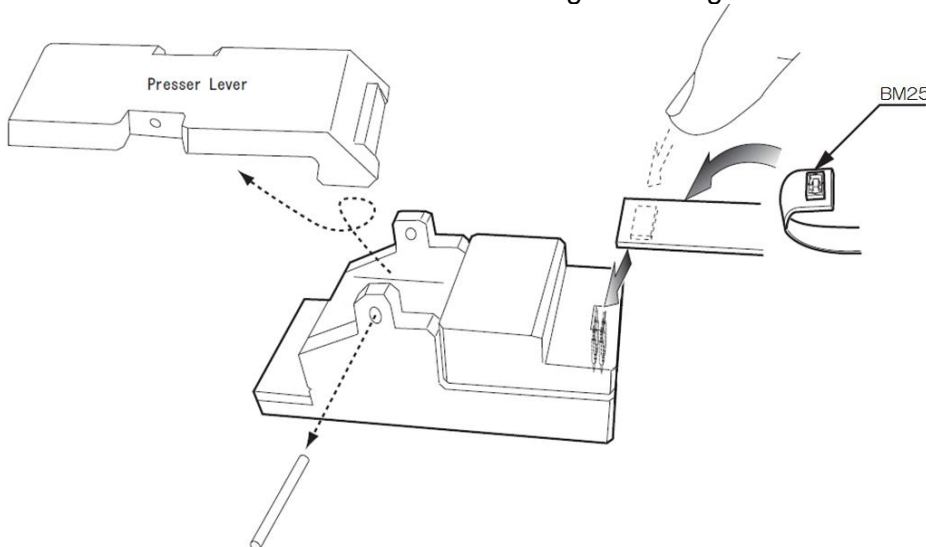


Tool can be attached to inspection machine by removing presser lever.

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 18 OF 19


5-3 Inspection jig summary

Shape of electric inspection jig can be arrange as below.


Standard



Vertical arranged

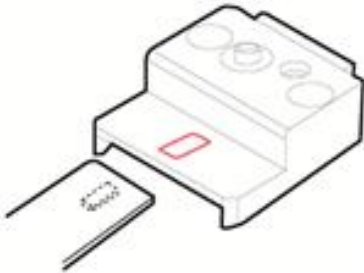

Make a pin



Cut



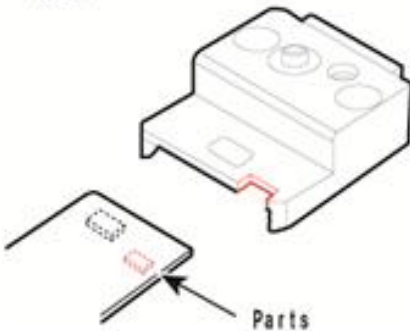


Plate for reinforcement  
Metal plate



Soldering of  
Connectors or Wiring

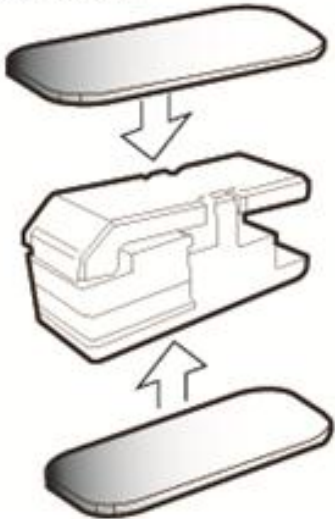

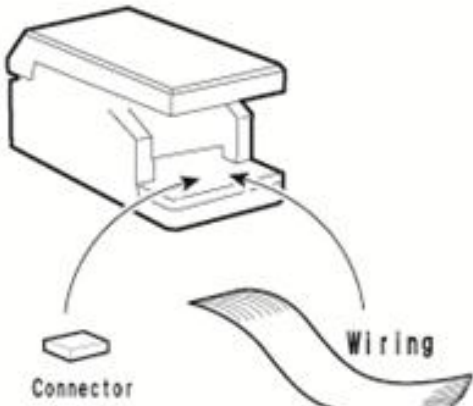

HIROSE ELECTRIC CO.,LTD

TITLE:	BM25 Series Guideline	ETAD-H1018-00
PRODUCT:	BATTERY BOARD TO FPC CONNECTOR, Pitch: 0.4mm, Width: 2.6mm, Stacking height: 0.7mm, Power: 10A	PAGE: 19 OF 19

#### 5-4 Contact information of YOKOWO CO.,LTD

Please contact to the following address for inquiry and information.

##### ■Japan

COMPANY YOKOWO CO.,LTD  
ADRESS 7-5-11 TAKINOGAWA, KITAKU, TOKYO, 114-8515, JAPAN  
TEL 03-3916-3141  
E-mail ds@jp.yokowo.com

##### ■China

COMPANY DALIAN Y-TECH PARTS CO.,LTD.(Sales representative of YOKOWO CO.,LTD )  
ADRESS 76#BEI CANG TUN LIANG JIA DIAN STREET FREE TRADE ZONE, DALIAN, CHINA  
TEL 86-411-8728-1952 FAX: 86-411-8728-2953  
E-mail yteci-dc@dan.wind.ne.jp

##### ■Hong Kong

COMPANY YOKOWO CORP.(H.K.)Ltd.  
ADRESS Unit 06-08A, 20F, China Hong Kong City,Tower3, 33Canton Road, Tsim Sha Tsui, Kowloon,  
Hong Kong  
TEL 852-2368-4870 FAX : 852-2366-3692  
E-mail joice@yokowo-corp.com.hk, anna@yokowo-corp.com.hk

##### ■Taiwan

COMPANY YOKOWO MICRO TECH CO.,LTD.  
ADRESS 7F.-1, No104, Minquan West Road, Datong District, Taipei City 103, Taiwan, R.O.C.  
TEL 886-2-2550-1522 FAX: 886-2-2550-8203  
E-mail ymt@yokowo.com.tw

##### ■Korea

COMPANY A-SUNG TECHNO Co.,Ltd.(Sales representative of YOKOWO CO ., LTD )  
ADRESS 4F,A-sung B/D,Dogok-ro 462,Songpa-gu,Seoul,Korea  
TEL 82-2-416-8390(ex.102) FAX:82-2-416-8392  
E-mail kybae@asung.com

COMPANY TAIJOO TRADING CO.,INC.(Sales representative of YOKOWO CO ., LTD )  
ADRESS RM.202 Mujige shopping center 1332-3, Seocho-dong, Seocho-ku Seoul, Korea (South) 137-859  
Tel 82-2-3487-9080 Fax : 82-2-3474-3605  
E-mail selct@naver.com