

	Count	Description of revisions	By	Chkd	Date		Count	Description of revisions	By	Chkd	Date
△						△					
△						△					

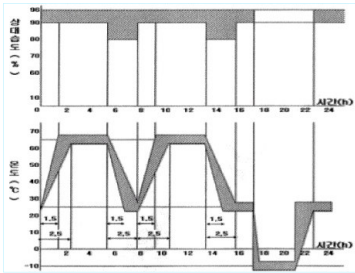
Applicable standard						
Rating	Operating temperature range	-40℃ ~ +105℃		Storage temperature range	-10℃ ~ +50℃(Packed Condition)	
	Power	---W		Characteristic impedance	50Ω (0 to 6GHz)	
	Peculiarity	---		Applicable cable	-	

SPECIFICATIONS							
ITEM		TEST METHOD		REQUIREMENTS		QT	AT

CONSTRUCTION								
General examination		Visually and by measuring instrument.			According to drawing.		O	O
Marking		Confirmed visually.					O	O

ELECTRICAL CHARACTERISTICS								
Contact resistance		Mate applicable connector and apply a current of 1 mA AC(Or 1,000Hz).			Center contact : 30 mΩ Max. Outer contact : 30 mΩ Max.		O	-
Insulation resistance		Mate applicable connector and apply a voltage of DC 500 V.			100 MΩ Min.		O	-
Voltage proof		Mate applicable and apply a voltage of AC 500 V for 1 min.			No flashover or breakdown.		O	-
Voltage standing wave ratio		Frequency 0 to 6GHz.			VSWR 1.5 Max.		O	-

MECHANICAL CHARACTERISTICS								
Mechanical operation		30 times insertions and extractions.			① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ② No damage, crack and looseness of parts.		O	-
Shock		980 m/s ² direction of pulse 6ms at 10 times in 3 directions.			① No electrical discontinuity of 1μs. ② Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ③ No damage, crack and looseness of parts.		O	-

ENVIRONMENTAL CHARACTERISTICS								
Rapid change of temperature (NOTE 1)		Temperature : -40±2 → 15~35 → +105±2 → 15~35 ℃ Time : 30 → 5 → 30 → 5 min Under 200 cycles.			① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max.		O	-
Damp heat, cycle (NOTE 1)		Exposed at 25±2 ℃, 65 % 25 h.  Under 10 cycles.			② No damage, crack or looseness of parts. ③ Insulation resistance : 10 MΩ Min.		O	-

Remarks conditions for testing		Drawn	Designed	Checked	Approved	Released
		G.S CHOI	G.S CHOI	D.G KIM	H.S KIM	ENG 20.05.29 DEPT
		20.05.29	20.05.29	20.05.29	20.05.29	

Note QT: Qualification test AT: Assurance test O: Applicable test							
HIROSE KOREA CO.,LTD.		SPECIFICATION SHEET			Part No. POK19-R-PC(800)		
Code No.(OLD) CL		Drawing No. ELC4-633115		Code No. CL 6341-0018-6-800		1/2	

Dry heat (NOTE 1)	Exposed at 105±2 °C, 300 h.	① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ② No damage, crack or looseness of parts. ③ Insulation resistance : 10 MΩ Min.	O	—
Damp and humidity heat (NOTE 1)	Exposed at 85±2 °C, 85%, 500 h.	① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ② No damage, crack or looseness of parts. ③ No evidence of corrosion which affects to operation of connector. ④ Insulation resistance : 10 MΩ Min.	O	—
Corrosion salt spray (NOTE 1)	Exposed at 35±2 °C, 5±1 % salt water spray for 48 h.	① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ② No damage, crack or looseness of parts. ③ No evidence of corrosion which affects to operation of connector.	O	—
Sulfur dioxide test (NOTE 1)	Exposed in 10 PPM, 40±2 °C, 90~95 % FOR 24 h.		O	—
Dust resistance (NOTE 1)	1) Kind of dust : JIS R5210 cement of portland, 1.5 Kg. 2) 10 seconds every 15 minutes, 1h progressing.	① Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ② No damage, crack or looseness of parts. ③ Insulation resistance : 10 MΩ Min.	O	—
Resistance to soldering heat	Reflow soldering : Peak temp : 260 °C Max for 30 s Min. Reflow temp : 180 °C for 60~120 s. 3 cycle.	① No deformation of case of excessive looseness of the terminals. ② No damage of electrical performance coating of solder.	O	—
COMBINE VIBRATION CHARACTERISTICS				
Combine vibration test (NOTE 1)	Exposed at 85±2°C, 90~95 %, 120 cycles (45 min : On, 15 min : Off) Vibration acceleration 4.4 g (43.12 m/s ²). Frequency 20 ~ 200 Hz at 40 h, in 3 directions.	① No electrical discontinuity of 1 μs. ② Contact resistance Center contact : 50 mΩ Max. Outer contact : 50 mΩ Max. ③ No damage, crack and looseness of parts.	O	—
(NOTE 1) 10 times insertions and extractions the pre-test / exposed 24h. Exposed 2h after the test.				
Note QT: Qualification test AT: Assurance test O: Applicable test				
HIROSE KOREA CO.,LTD.		SPECIFICATION SHEET	Part No. POK19-R-PC(800)	
Code No.(OLD) CL	Drawing No. ELC4-633115	Code No. CL 6341-0018-6-800	2/2	