

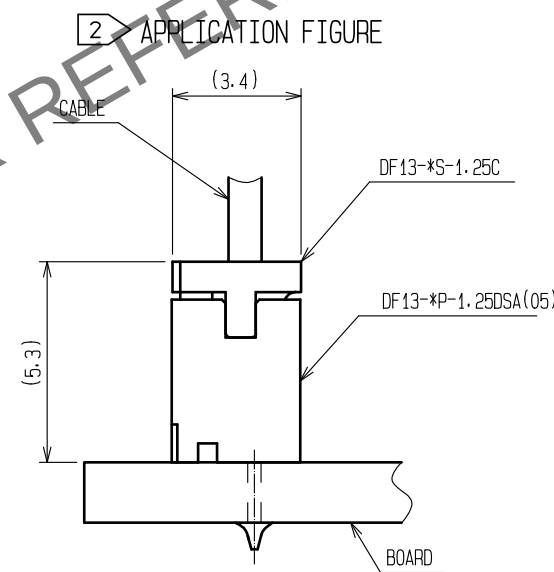
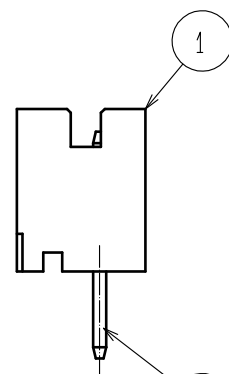
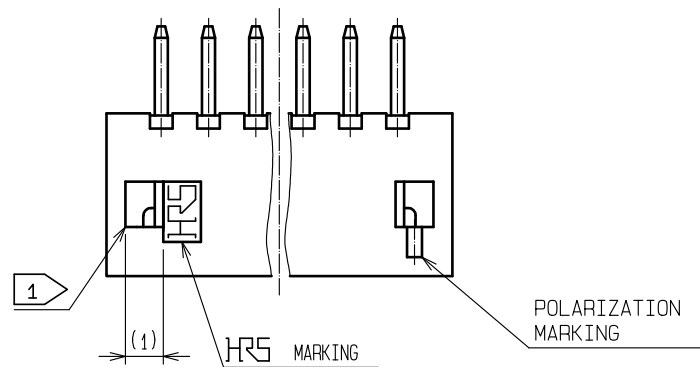
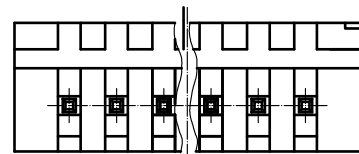
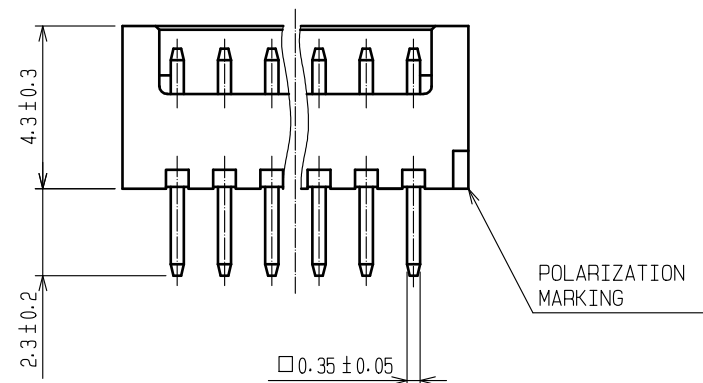


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

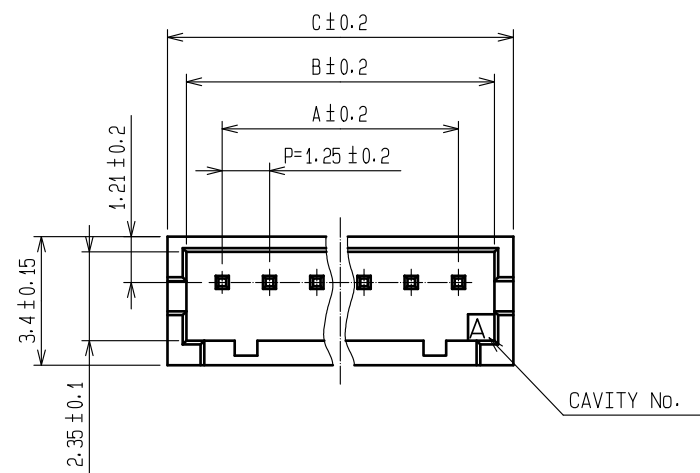

3 RECOMMENDED PATTERN (BOARD THICKNESS 1mm)

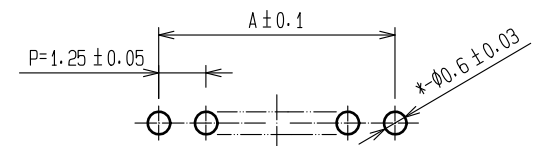

- 1 WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK OF CONNECTOR SHALL BE SET AT THE CENTER OF HOUSING. IN CASE THAT THE NUMBER OF CONTACTS IS MORE THAN FOUR, THE TWO LOCKS SHALL BE SET IN ACCORDANCE WITH THE DRAWINGS.
- 2 WHEN THIS CONNECTOR MATES WITH DF13-*S-1.25C, THE MATING HEIGHT IS 5.3mm.
- 3 RECOMMENDED THROUGH HOLE DIA. : $\phi 0.6 \pm 0.03$
- 4 100 CONNECTORS ARE IN ONE PACK.

1		POLYAMIDE	BEIGE (NATURAL) , UL94V-0	2	BRASS	SURFACE: TIN PLATED 1μm min UNDER PLATING: COPPER PLATED 1μm min	
NO.		MATERIAL	FINISH , REMARKS	NO.		MATERIAL	FINISH , REMARKS
UNITS mm			SCALE 5 : 1	COUNT		DESCRIPTION OF REVISIONS	
						DESIGNED	CHECKED
						DATE	
						APPROVED : SJ. OKAMURA	20211217
						CHECKED : SZ. ONO	20211217
						DESIGNED : HT. SATO	20211217
						DRAWN : SK. CHIBA	20211217
						DRAWING NO.	EDC-083673-05-00
						PART NO.	DF13-*P-1.25DSA(05)
						CODE NO.	CL536-
							1/1