
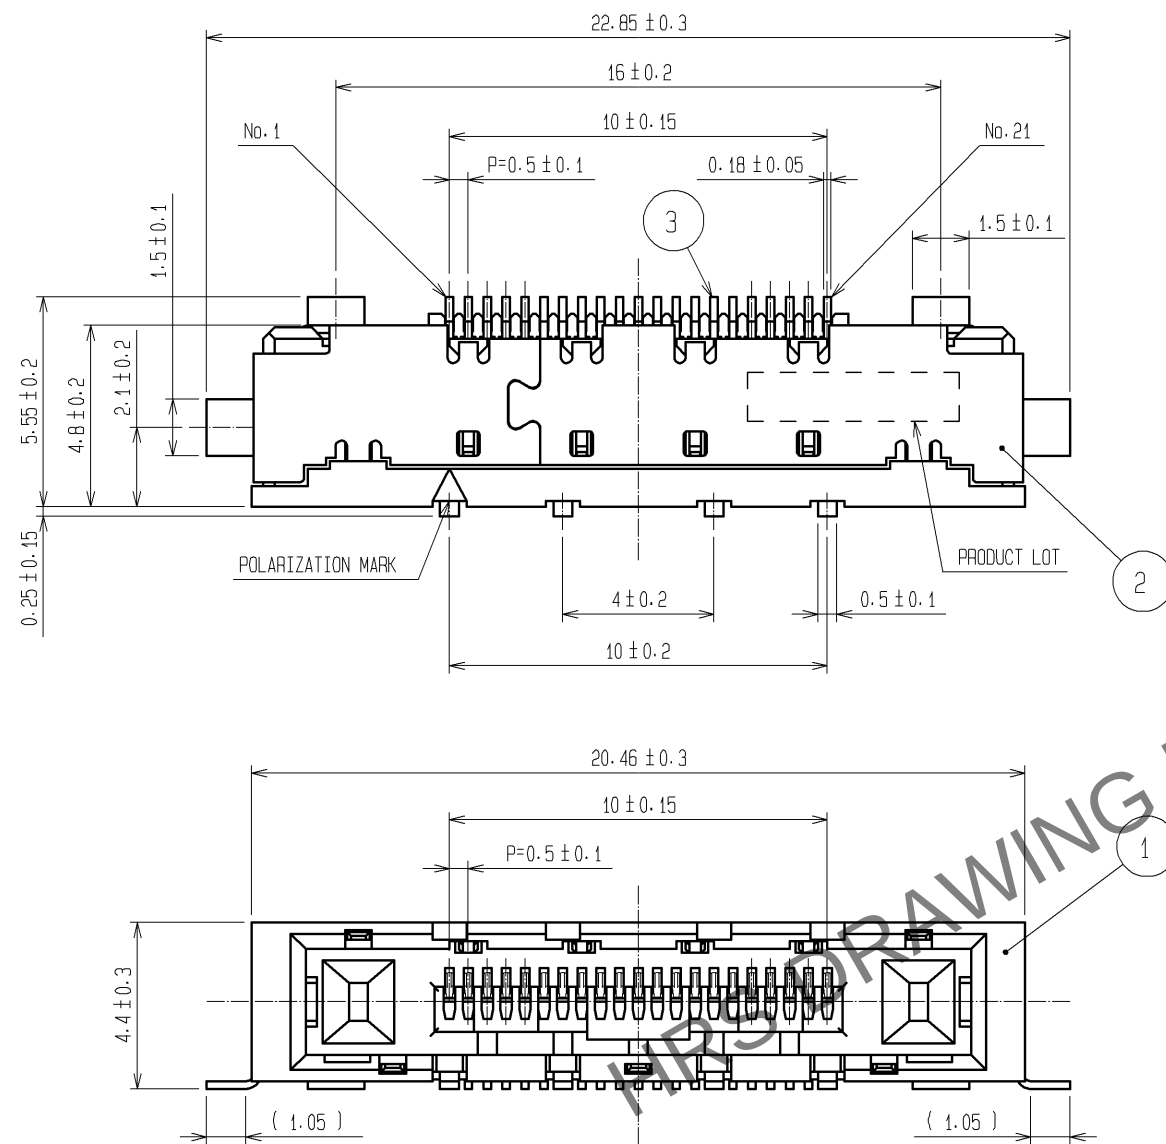
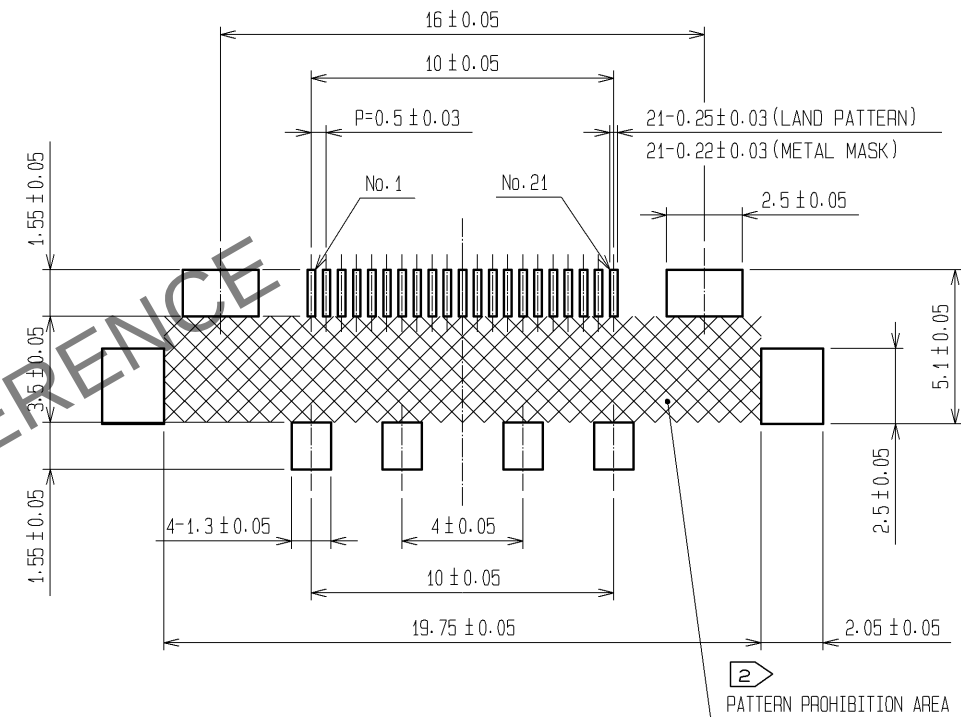


RECOMMENDED LAND PATTERN DIMENSION (4:1)





- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3 () INDICATES A REFERENCE DIMENSION.
4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

			5	PE	(COVER TAPE)				
			4	PS	(EMBOSSED CARRIER TAPE)				
2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1μm min	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min				
		UNDER PLATING:NICKEL 0.2μm min			LEAD AREA:GOLD 0.03μm min	1			
1	LCP	BLACK, UL94V-0			UNDER PLATING:NICKEL 1μm min				
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS				
UNITS mm			SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-002932	DESIGNED KN. SHIBUYA	CHECKED HT. YAMAGUCHI	DATE 08.03.27
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.01.24	DRAWING NO.		EDC3-157339-00			
		CHECED : HT. YAMAGUCHI	08.01.24	PART NO.		FX16-21S-0.5SH			
		DESIGNED : KN. SHIBUYA	08.01.24	CODE NO.		CL575-3411-5-00			
		DRAWN : KN. SHIBUYA	08.01.24						




Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT

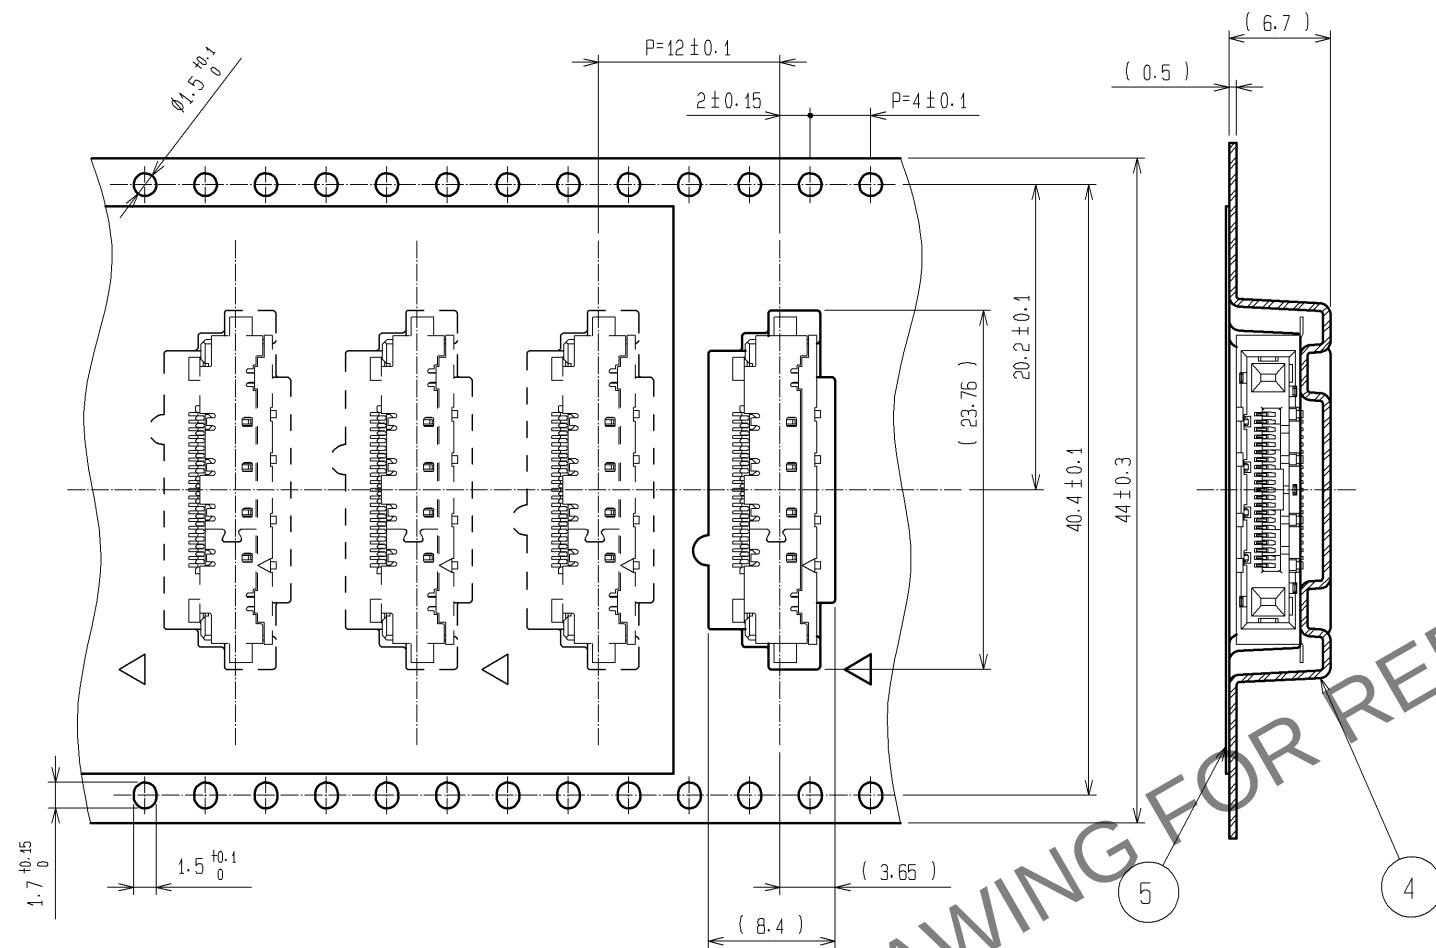

REELED DIMENSION (FREE)

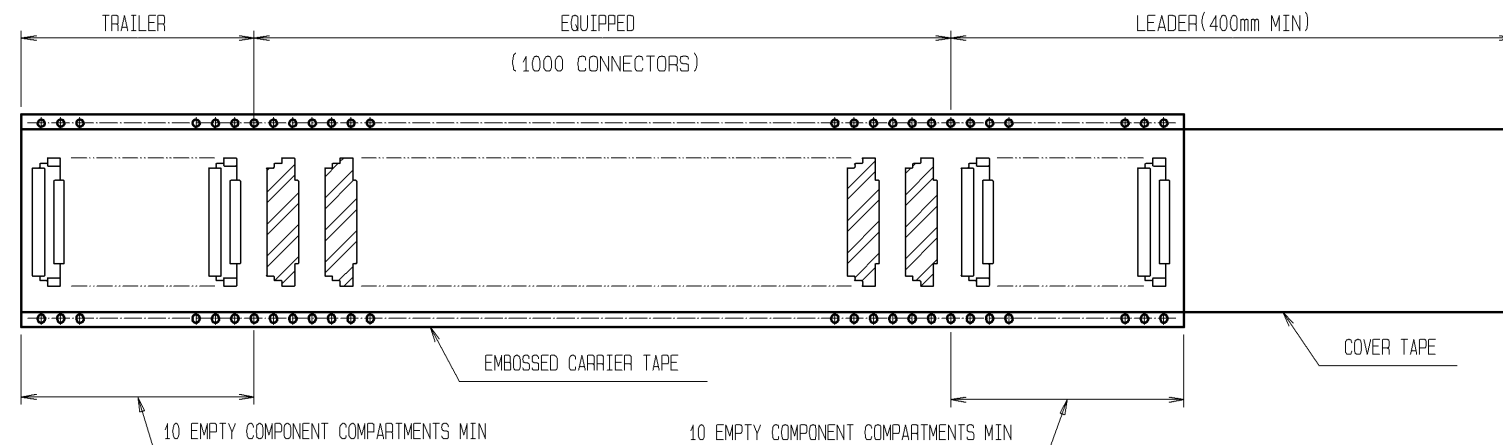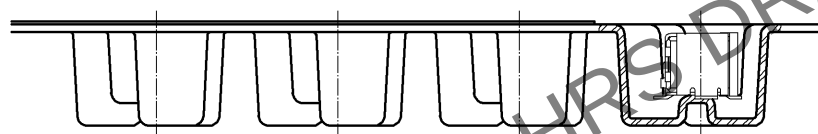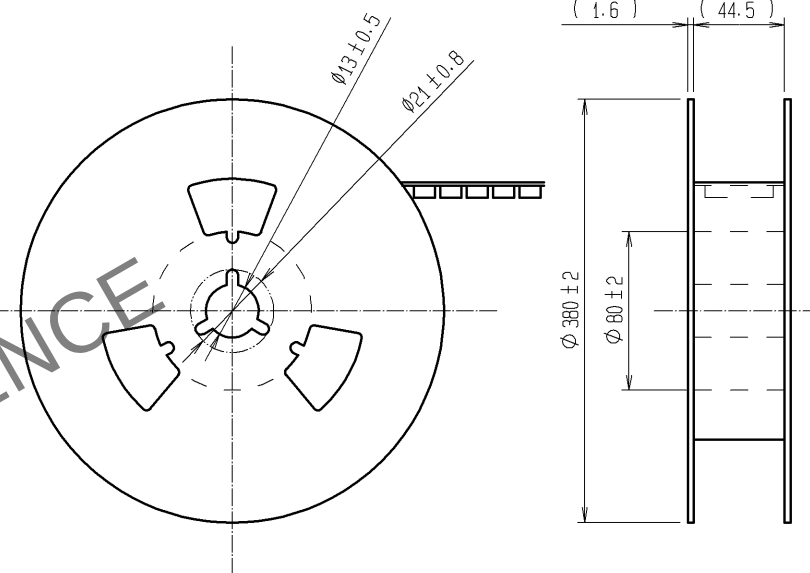

HR5

DRAWING NO.	EDC3-157339-00
PART NO.	FX16-21S-0.5SH
CODE NO.	CL575-3411-5-00

2/2