


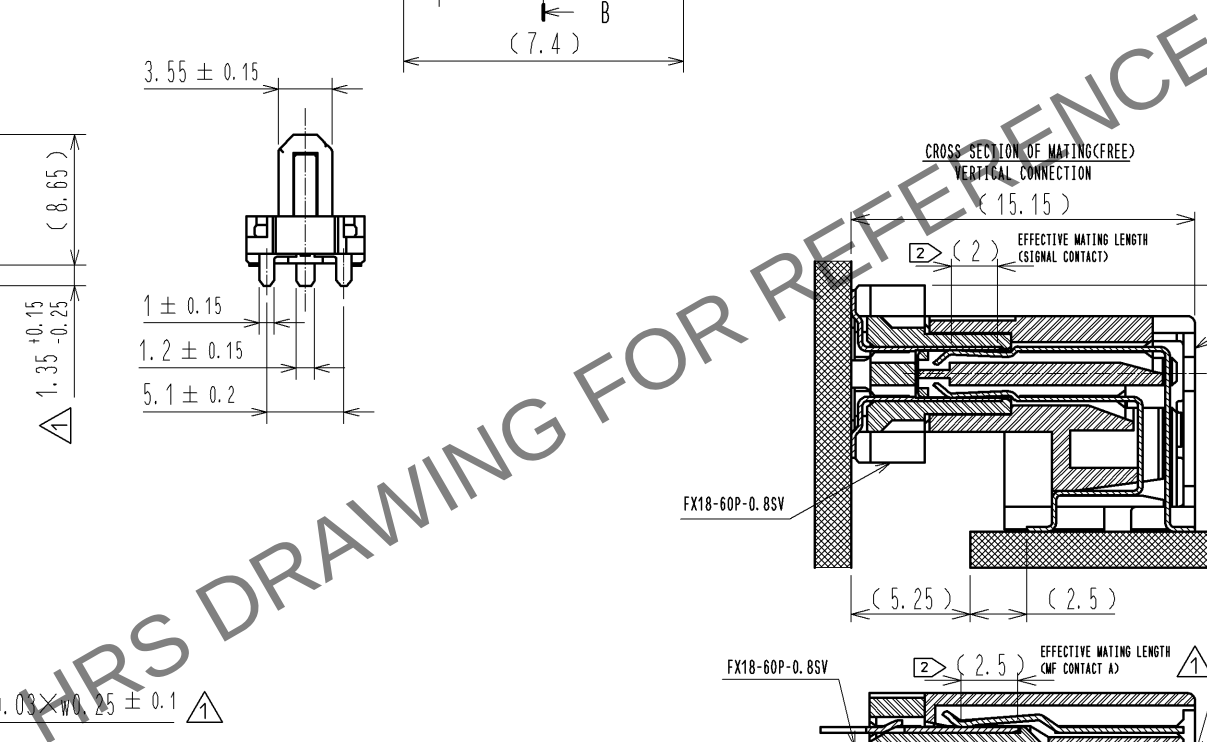


1 2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.

1 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
4 IT SHOWS THE VACUUM PICKUP AREA. (SEE PAGE 2)
REMOVE THE MYLAR TAPE BEFORE MATING CONNECTORS.

5 THIS IS PACKAGED IN TRAY. (60PCS/TRAY)

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm							
		LEAD AREA:TIN-PLATING 1 μm							
		UNDER PLATING:NICKEL 1.3 μm	△1	6	POLYIMIDE				
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm		5	POLYSTYRENE				
		LEAD AREA:GOLD 0.03 μm							
		UNDER PLATING:NICKEL 1.3 μm	△1	4	PHOSPHOR BRONZE				
1	POLYAMIDE	BLACK UL94V-0				△1			
UNDER PLATING:NICKEL 1.3 μm									
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS		

UNITS mm		SCALE 2 : 1	COUNT △ 1	DESCRIPTION OF REVISIONS DIS-F-005993	DESIGNED TH. SANO	CHECKED KI. HIROKAWA	DATE 12. 01. 27
 HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA		09. 04. 24	DRAWING NO. EDC3-159561-00			
	CHECED : HS. OZAWA		09. 04. 24	PART NO. FX18-60P-0. 8SV			
	DESIGNED : KI. HIROKAWA		09. 04. 24	CODE NO. CL579-0017-2-00			
	DRAWN : KI. HIROKAWA		09. 04. 24	 1 2			

