


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO

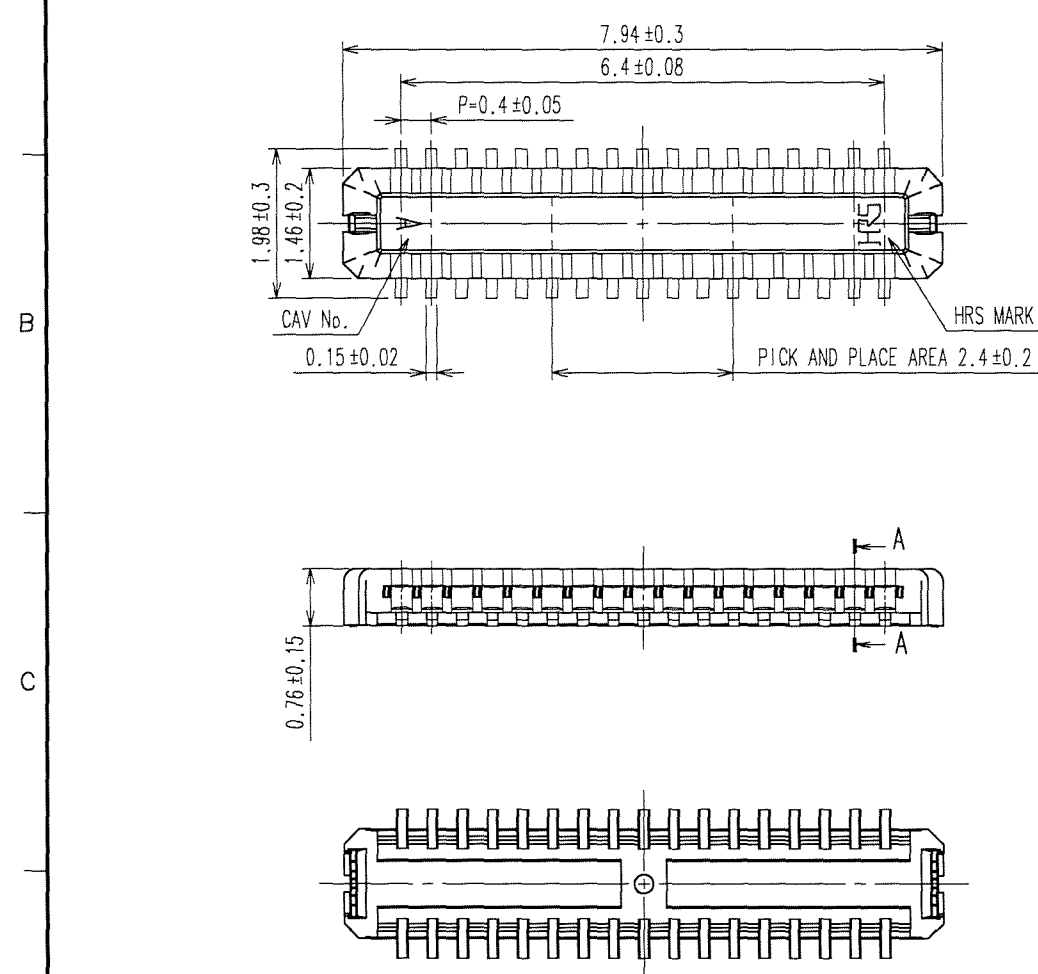

- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 8000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 mm AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 mm AT MIN SHALL BE EMPTY.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD $0.05 \mu\text{m}$ MIN.
SMT LEAD : GOLD $0.05 \mu\text{m}$ MIN.
UNDERPLATING : NICKEL $1 \mu\text{m}$ MIN.
(SURFACE : SEALING)
5. METAL HOLD DOWN PLATING SPECIFICATIONS.
MOUNTING AREA: GOLD $0.05 \mu\text{m}$ MIN.
UNDERPLATING : NICKEL $1 \mu\text{m}$ MIN.
6. PEEL FORCE REFERS TO JIS C 0806.


HRS DRAWING FOR REFERENCE

RECOMMENDED METAL MASK OPENING PATTERN

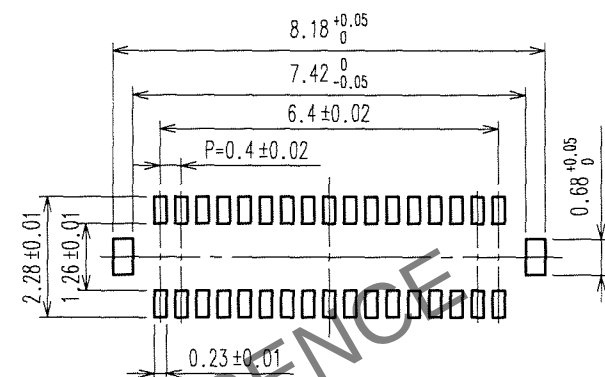


RECOMMENDED SOLDER PASTE: THICKNESS $120 \mu\text{m}$

RECOMMENDED PATTERN

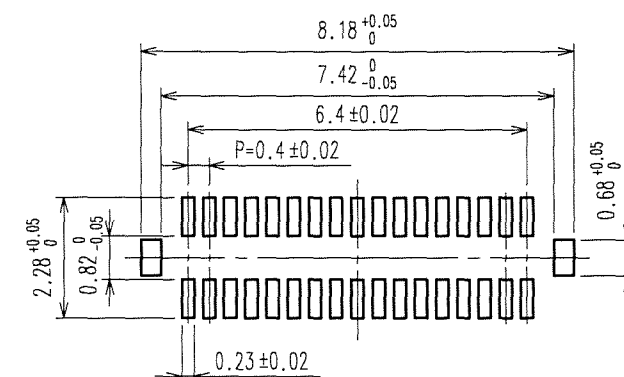


ENGAGEMENT FIGURE

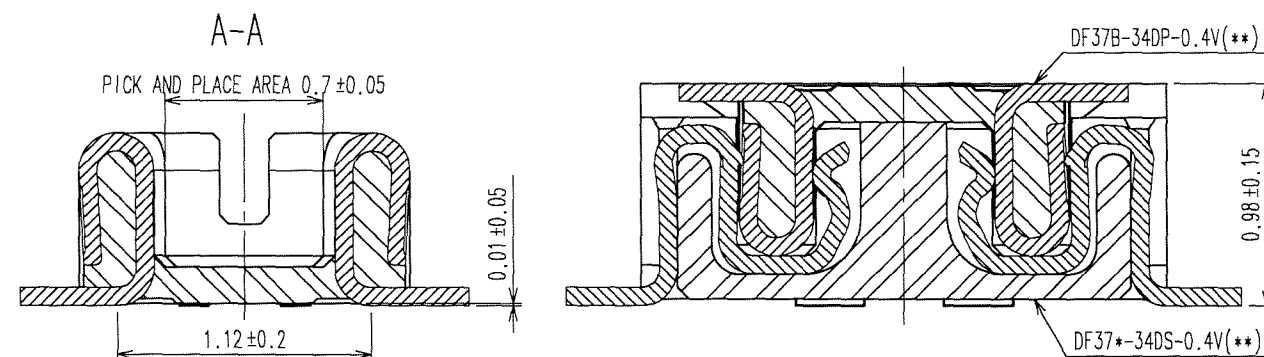

3	PHOSPHOR BRONZE	5	6	PS	PLASTIC REEL (BLACK)
2	PHOSPHOR BRONZE	4	5	POLYESTER	CLEAR (COVER TAPE)
1	LCP	UL94V-0, BLACK	4	PS	CLEAR (EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		T. Oai	T. Oai	K. Ikeda	K. Ikeda
		67.03.29	67.03.29	67.03.29	67.03.29
DRAWING NO.		PART NO.			
EDC3-315554-01		DF37B-34DP-0.4V(51)			
UNITS		CODE NO.			
mm		CL684-3064-2-51			
HRS		HIROSE ELECTRIC CO., LTD			

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

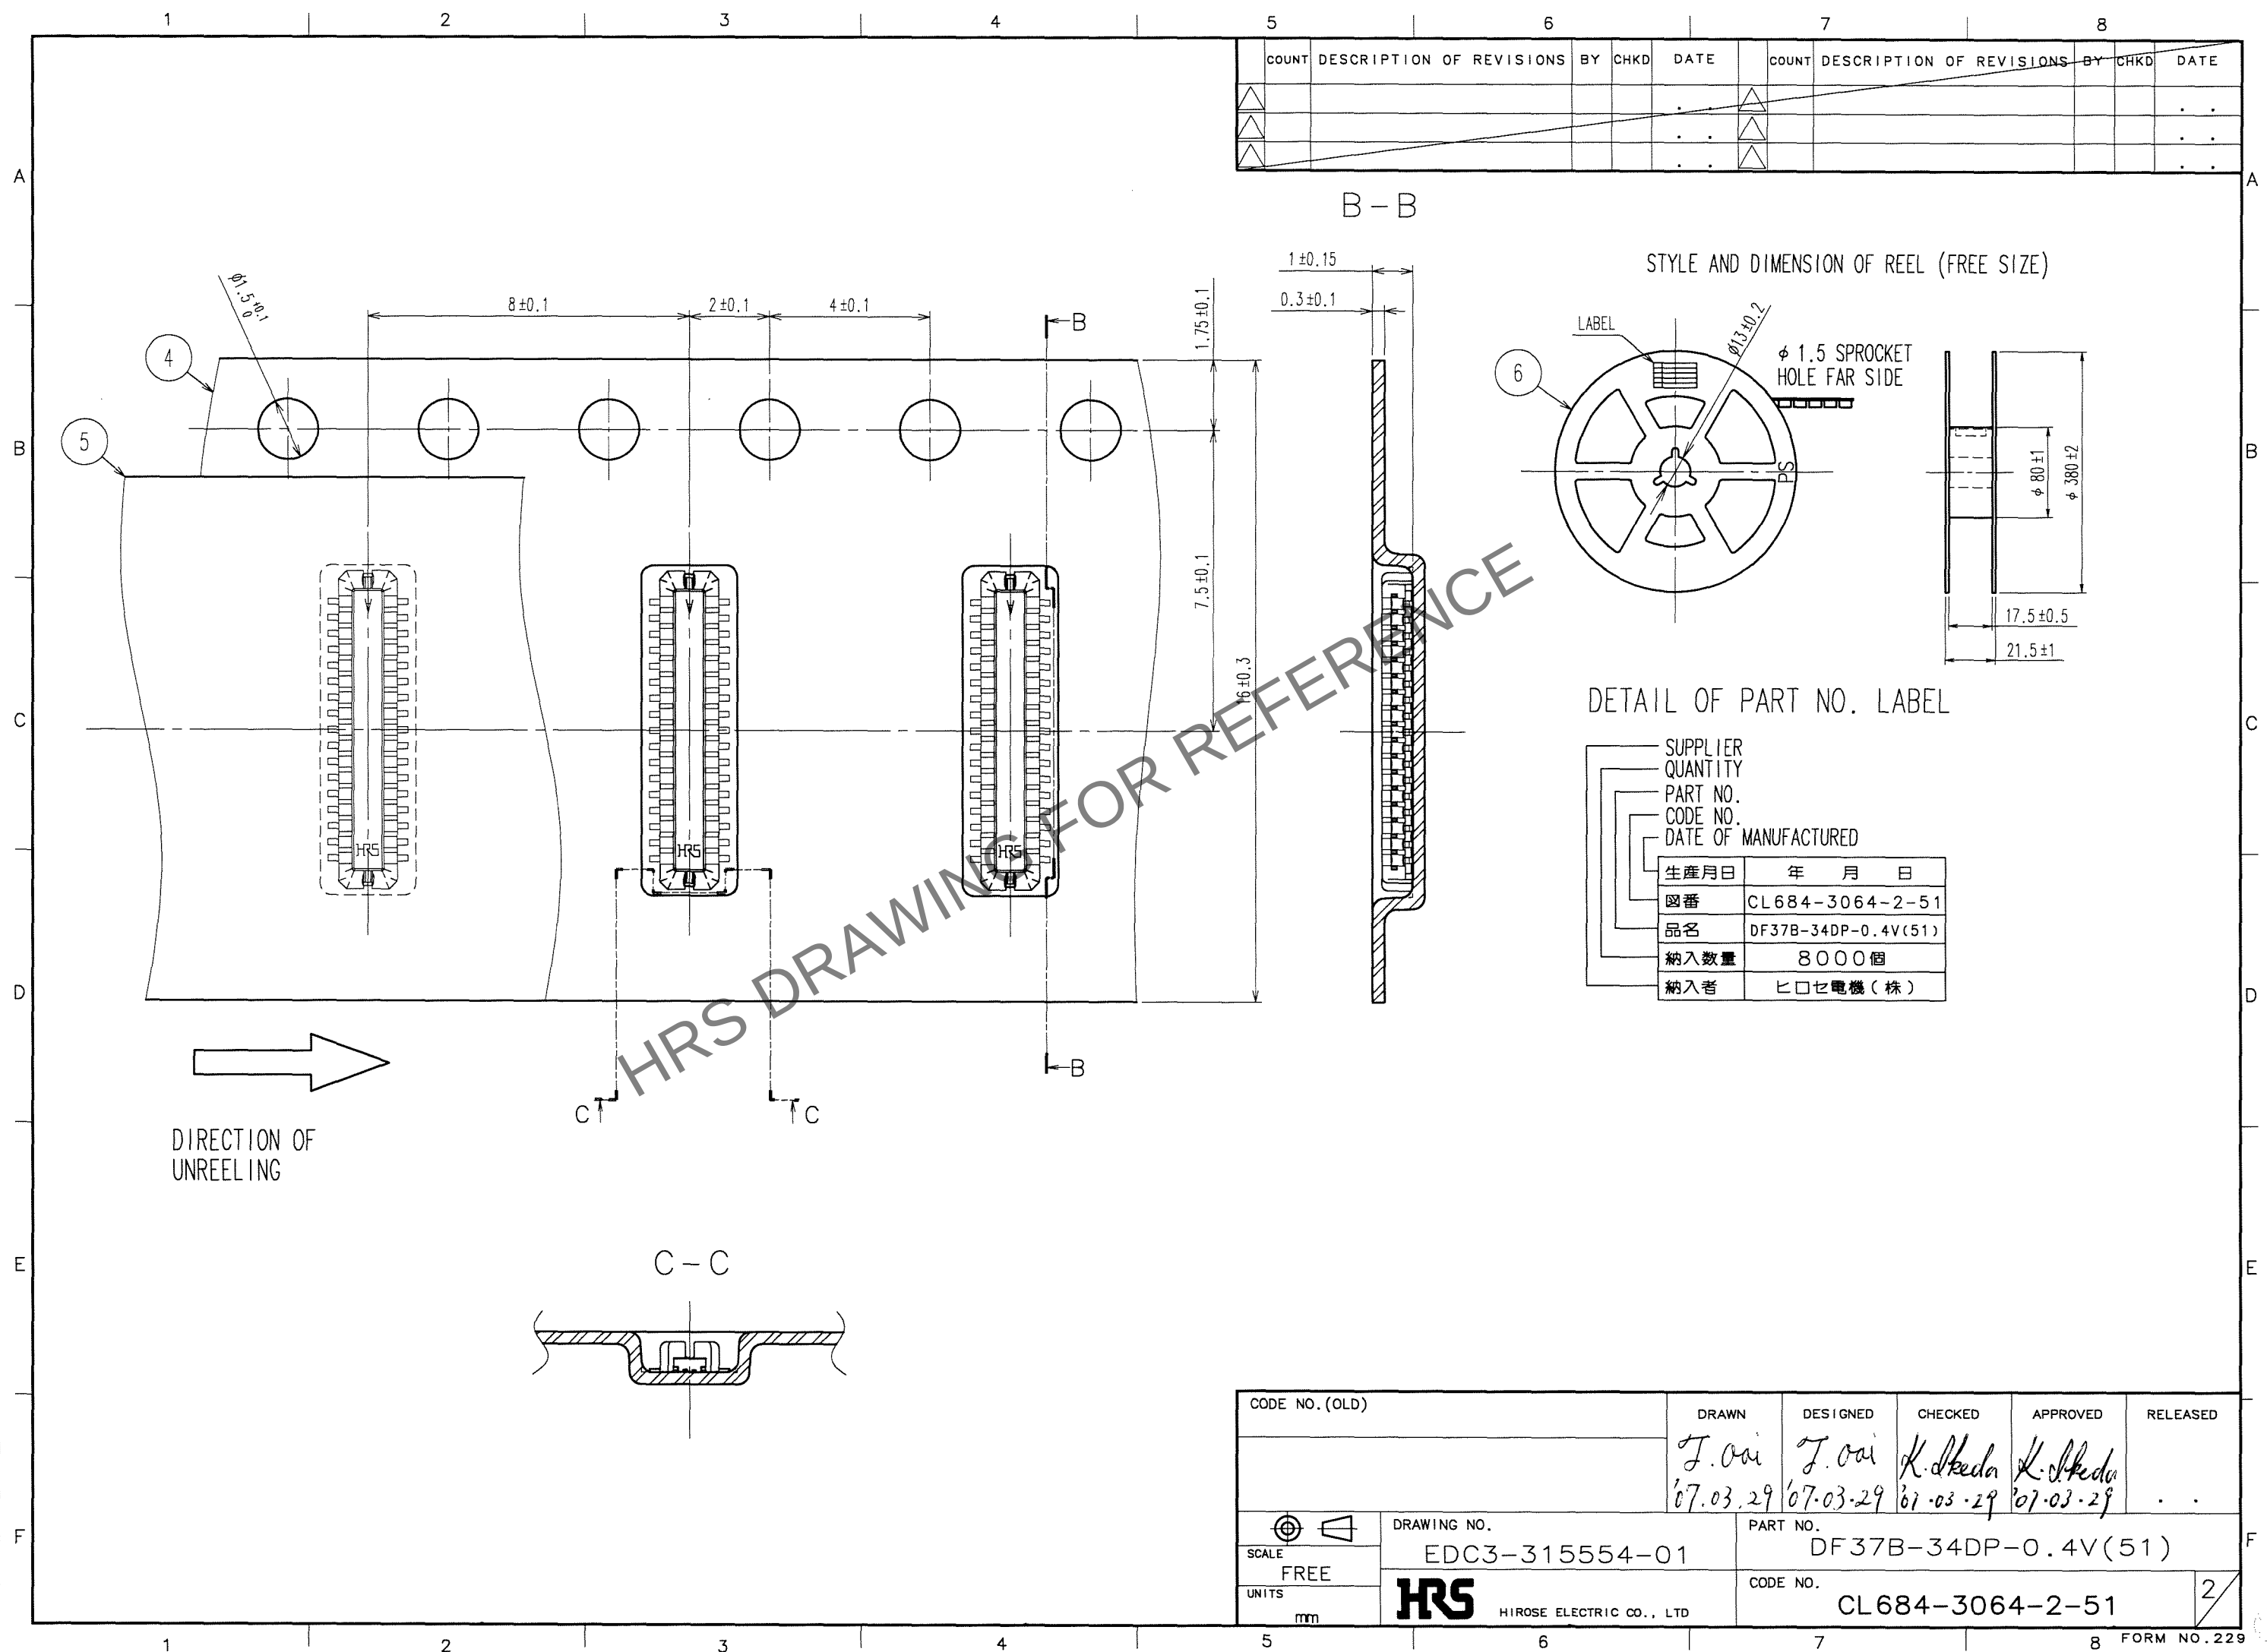

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	J. Oai	J. Oai	K. Ikeda	K. Ikeda	
	07.03.29	07.03.29	07.03.29	07.03.29	
SCALE	DRAWING NO.	PART NO.			
FREE	EDC3-315554-01	DF37B-34DP-0.4V(51)			
UNITS	HIROSE ELECTRIC CO., LTD.	CODE NO.			
mm		CL684-3064-2-51			