


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

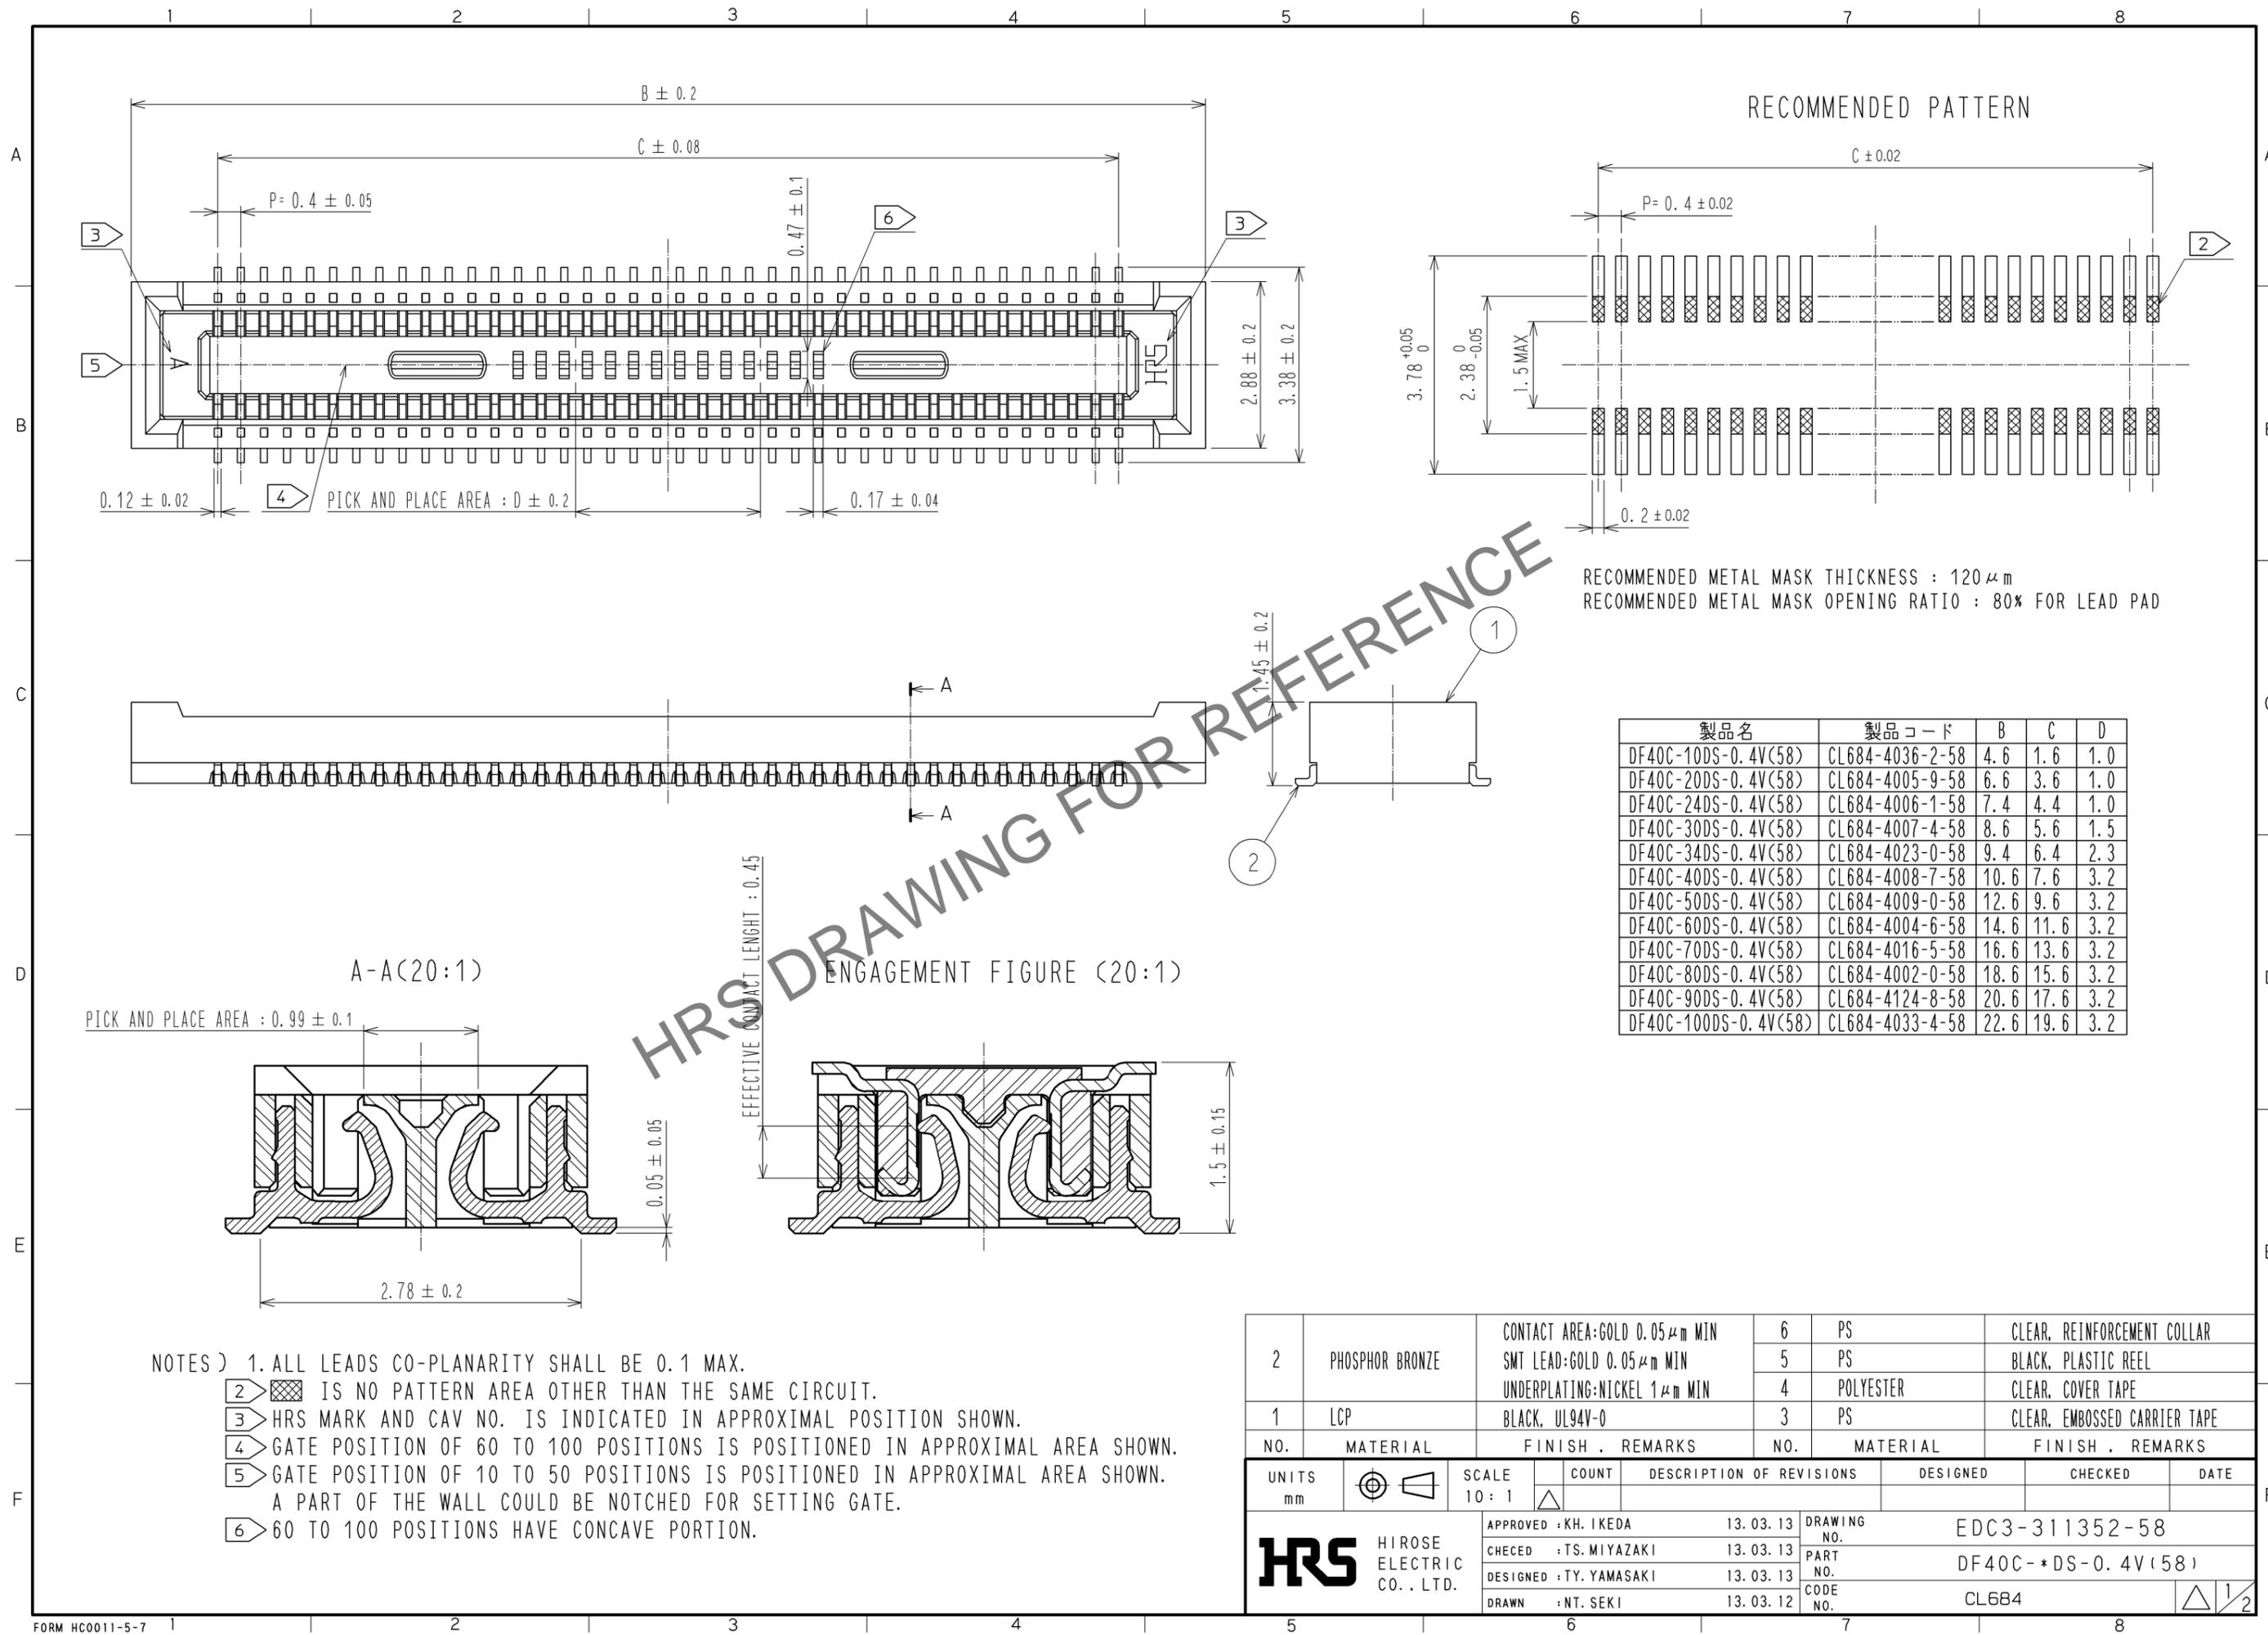



- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
 2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
 3. HRS MARK AND CAV NO. IS INDICATED IN APPROXIMAL POSITION SHOWN.
 4. GATE POSITION OF 60 TO 100 POSITIONS IS POSITIONED IN APPROXIMAL AREA SHOWN.
 5. GATE POSITION OF 10 TO 50 POSITIONS IS POSITIONED IN APPROXIMAL AREA SHOWN.
 A PART OF THE WALL COULD BE NOTCHED FOR SETTING GATE.
 6. 60 TO 100 POSITIONS HAVE CONCAVE PORTION.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.05 μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR		
		SMT LEAD: GOLD 0.05 μm MIN	5	PS	BLACK, PLASTIC REEL		
		UNDERPLATING: NICKEL 1 μm MIN	4	POLYESTER	CLEAR, COVER TAPE		
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
UNITS mm		SCALE 10:1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA 13.03.13	DRAWING NO. EDC3-311352-58				
		CHECED : TS. MIYAZAKI 13.03.13	PART NO. DF40C-*DS-0.4V(58)				
		DESIGNED : TY. YAMASAKI 13.03.13	CODE NO. CL684				
		DRAWN : NT. SEKI 13.03.12					

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



EMBOSSED CARRIER TAPE PACKAGING (5:1)

STYLE AND DIMENSION OF REEL(FREE SIZE)

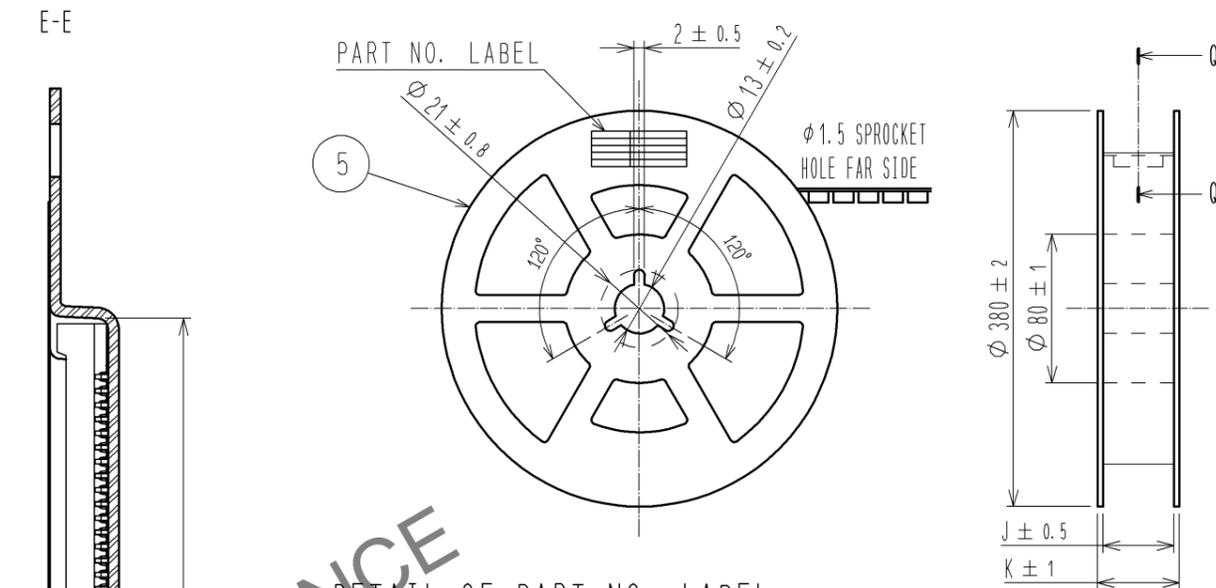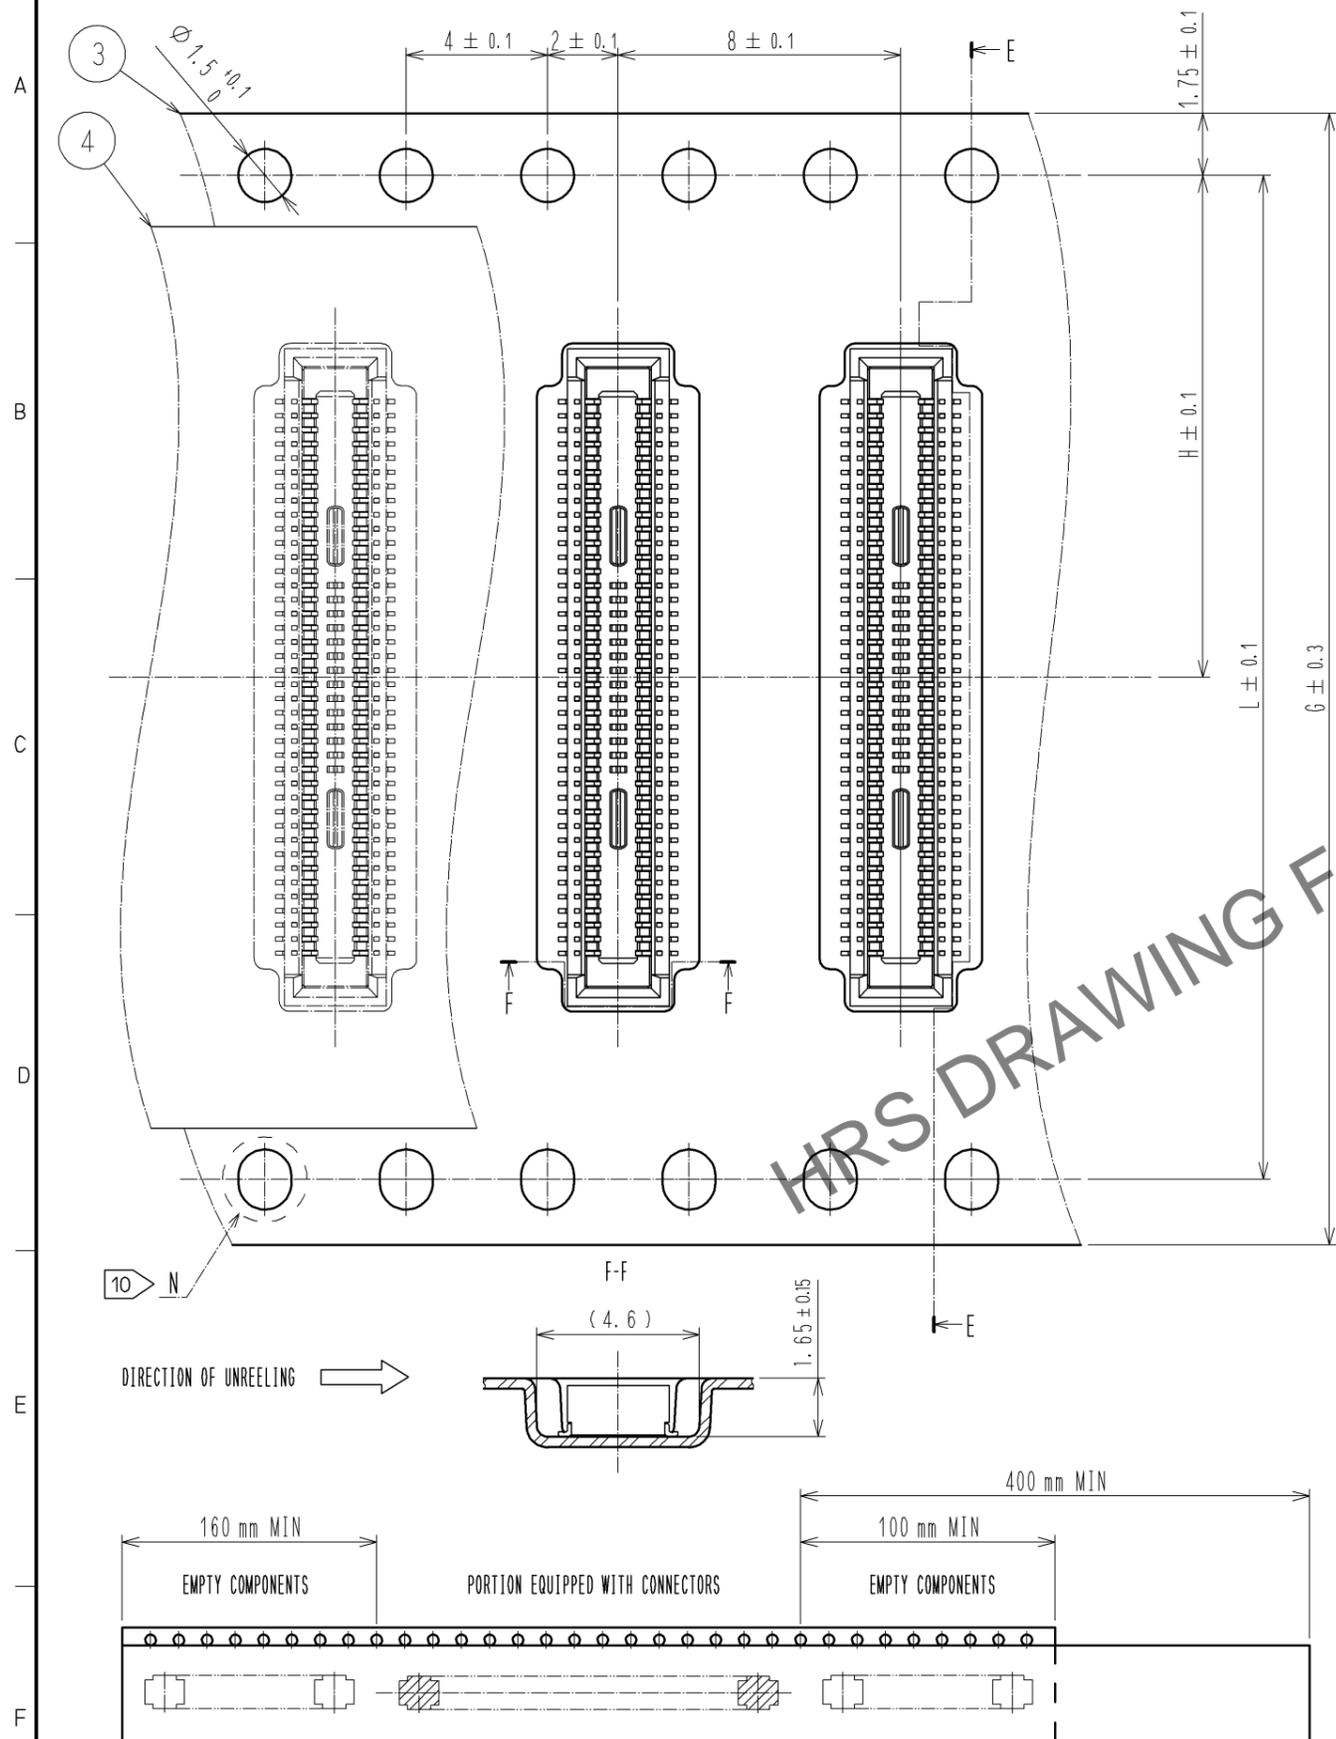

DETAIL OF PART NO. LABEL

製造年月日	** ** *	DATE OF MANUFACTURED
製品コード	CL684-****-58	CODE NO.
製品名	DF40C-*DS-0.4V(58)	PART NO.
数量	1000	QUANTITY
納入者	ヒロセ電機(株)	SUPPLIER

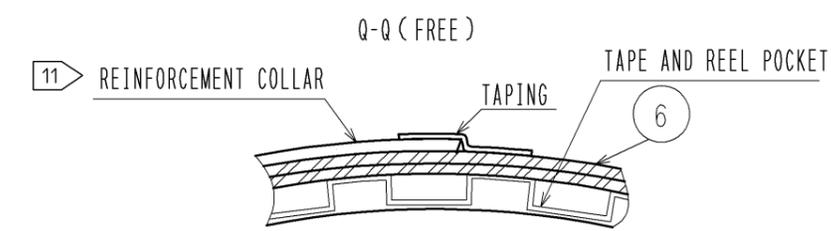

PART NO.	G	H	J	K	L	M
DF40C-10DS-0.4V(58)	16	7.5	17.5	21.5	-	4.9
DF40C-20DS-0.4V(58)	16	7.5	17.5	21.5	-	6.9
DF40C-24DS-0.4V(58)	16	7.5	17.5	21.5	-	7.7
DF40C-30DS-0.4V(58)	24	11.5	25.5	29.5	-	8.9
DF40C-34DS-0.4V(58)	24	11.5	25.5	29.5	-	8.9
DF40C-40DS-0.4V(58)	24	11.5	25.5	29.5	-	10.9
DF40C-50DS-0.4V(58)	24	11.5	25.5	29.5	-	12.9
DF40C-60DS-0.4V(58)	24	11.5	25.5	29.5	-	14.9
DF40C-70DS-0.4V(58)	32	14.2	33.5	37.5	28.4	16.9
DF40C-80DS-0.4V(58)	32	14.2	33.5	37.5	28.4	18.9
DF40C-90DS-0.4V(58)	44	20.2	45.5	49.5	40.4	20.9
DF40C-100DS-0.4V(58)	44	20.2	45.5	49.5	40.4	22.9

- NOTES)
- 7. PER REEL 1000 CONNECTORS.
 - 8. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 9 REFER TO JIS C 0806(IEC 60286-3, PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - 10 10 TO 60 POSITIONS EMBOSSED CARRIER TAPE HAS THE SPROCKET HOLE ON ONE SIDES.
 - 11 AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS	DRAWING NO.	EDC3-311352-58
	PART NO.	DF40C-*DS-0.4V(58)
	CODE NO.	CL684