

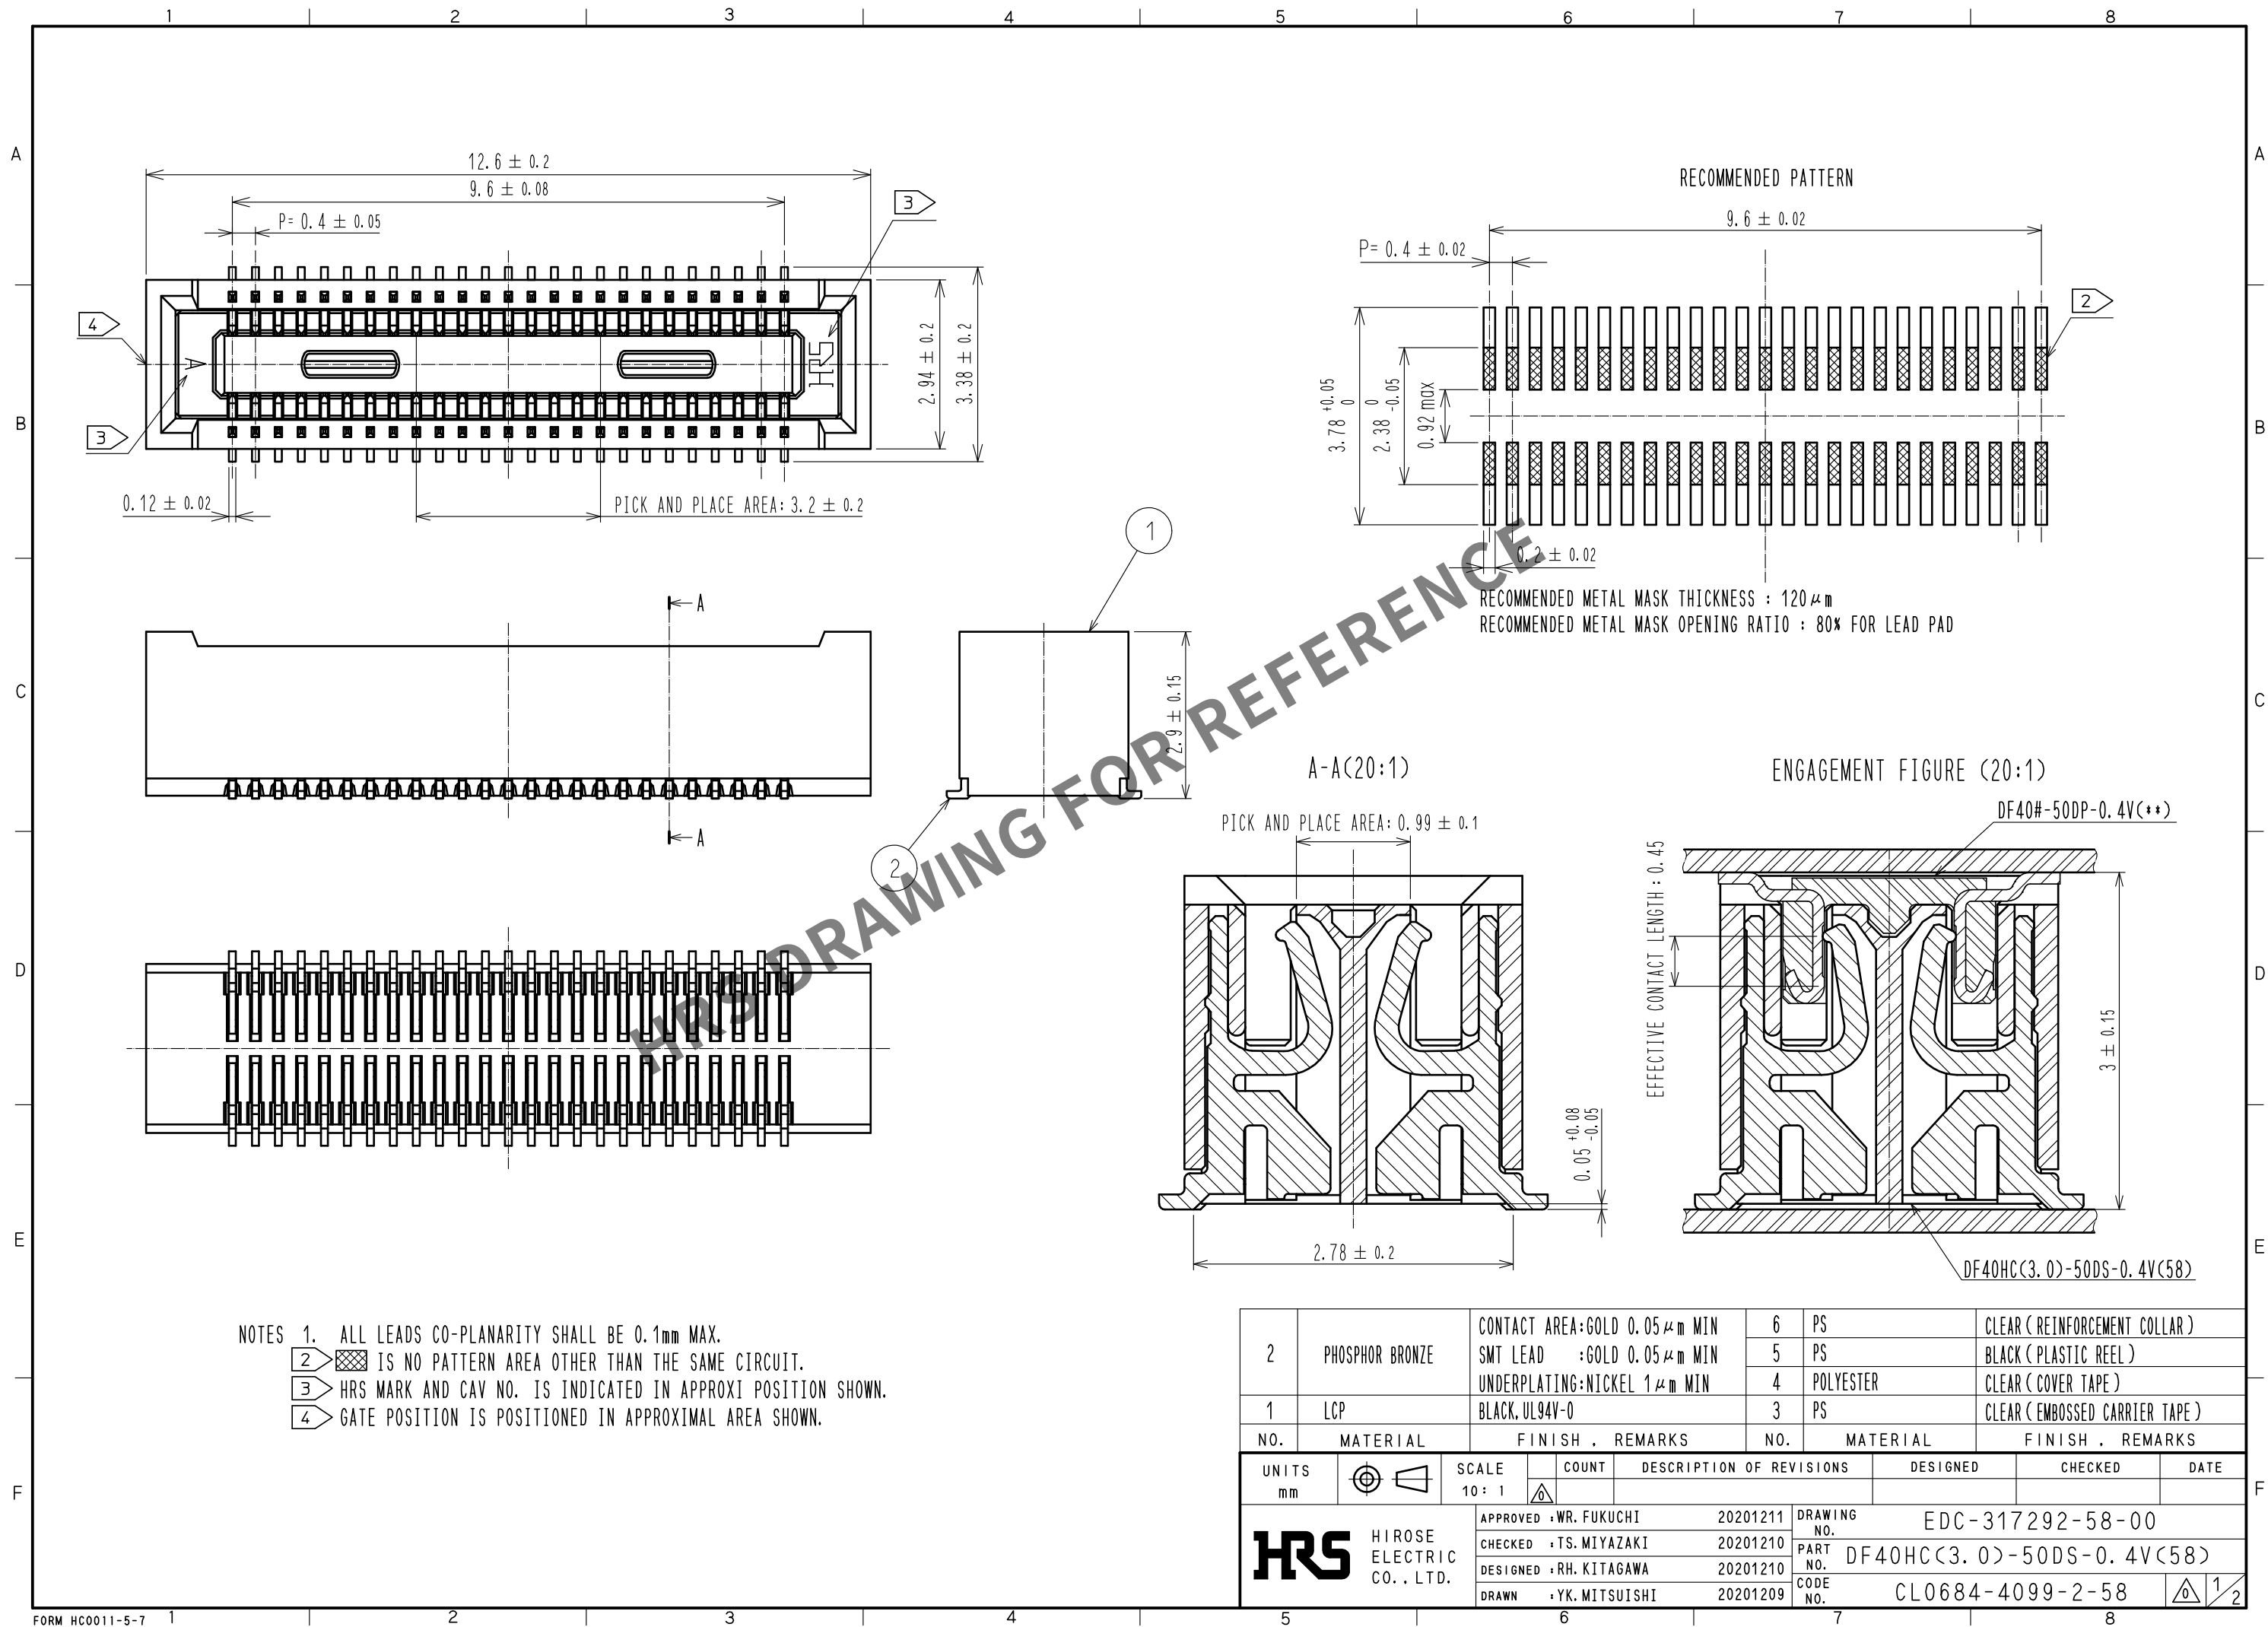
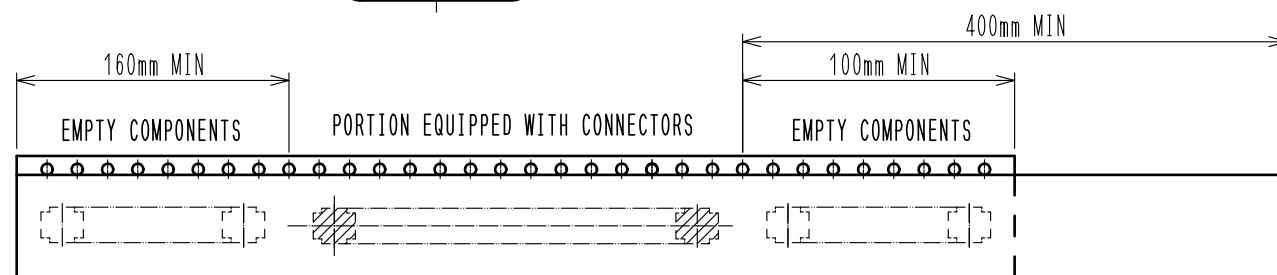


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)

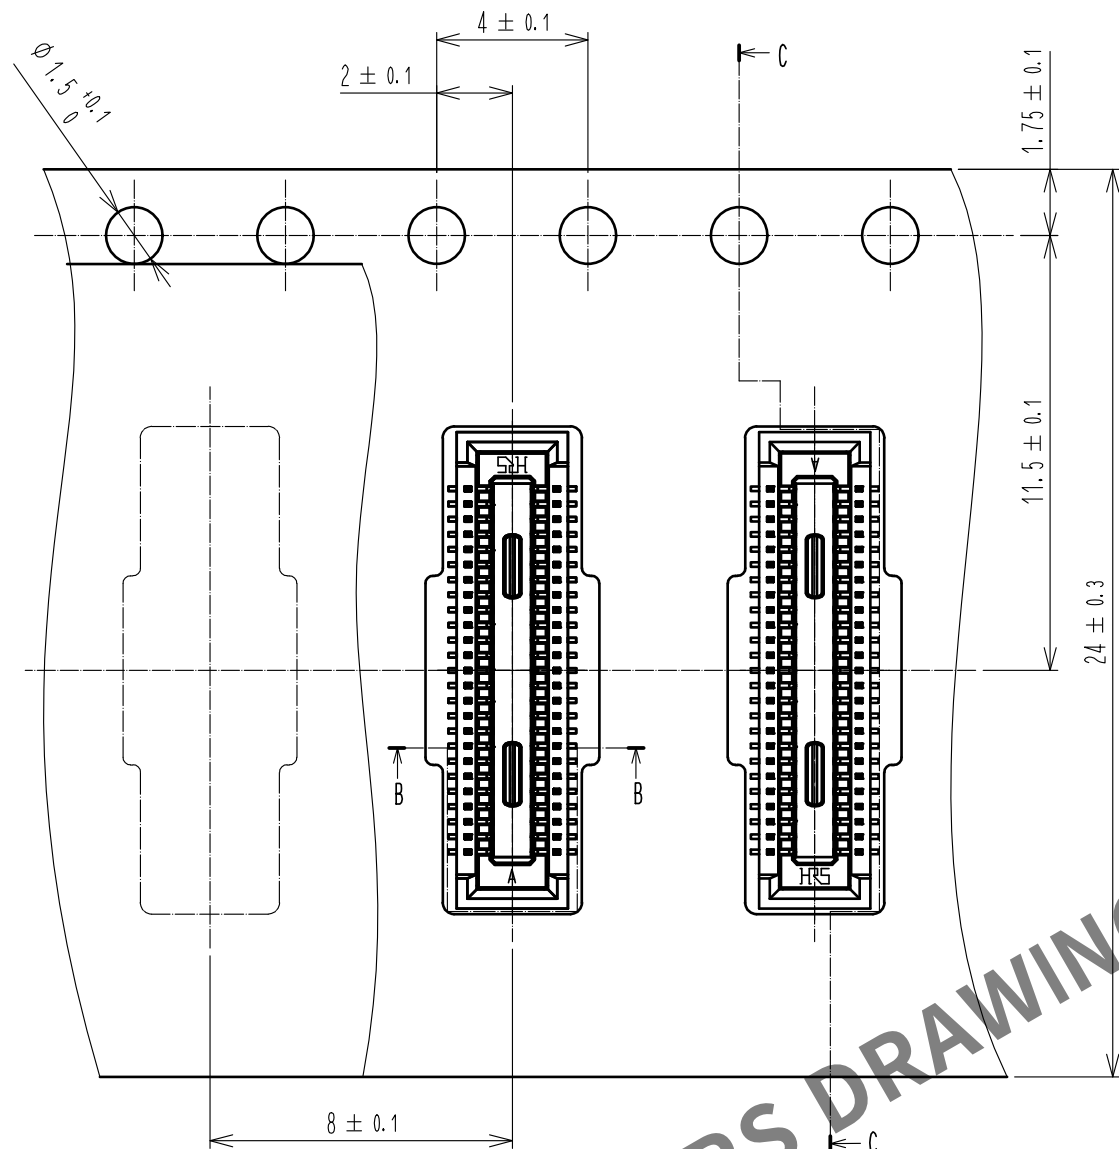


TRAILER

7 TAPING(FREE)


LEADER

C-C(5:1)

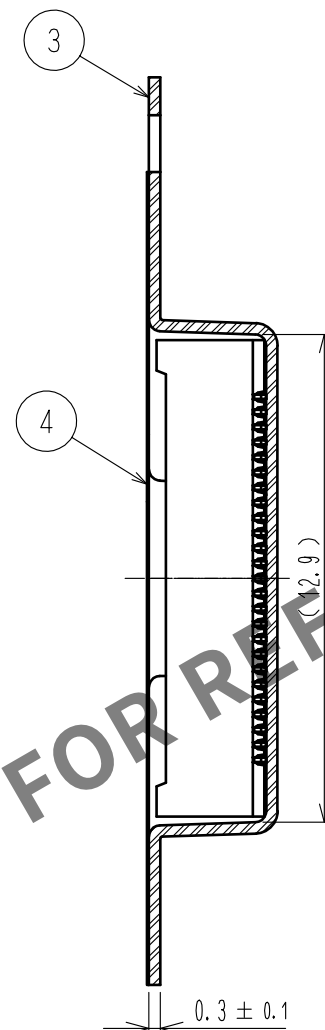


DIRECTION OF UNREELING →

STYLE AND DIMENSION OF REEL (FREE SIZE)

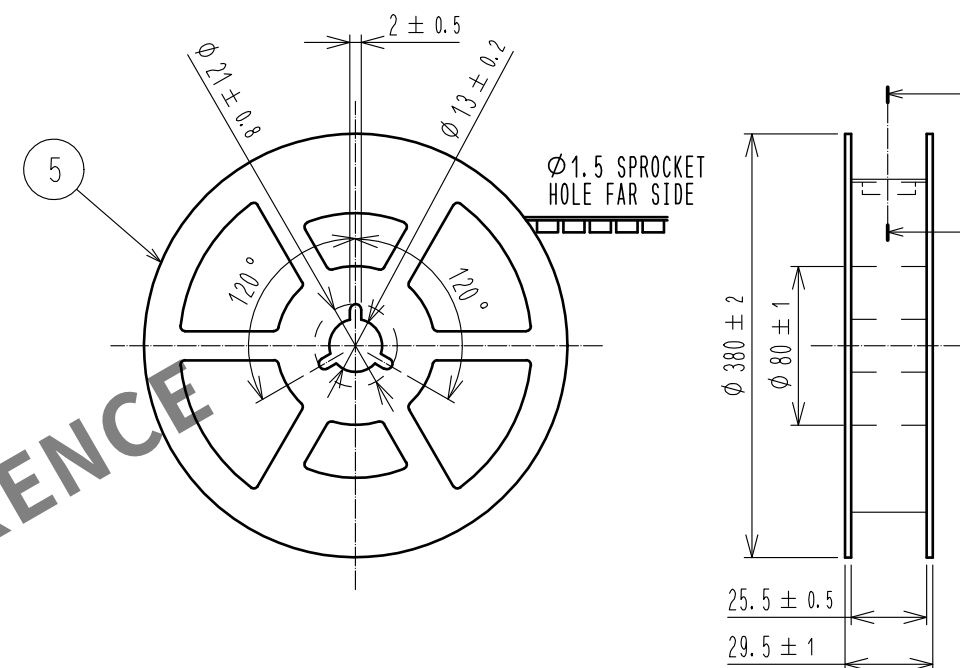

D-D (FREE)

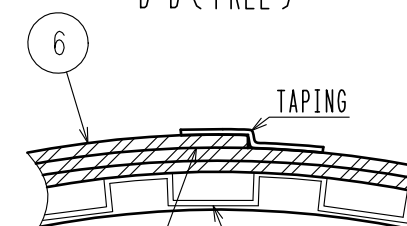

8 REINFORCEMENT COLLAR TAPE AND REEL POCKET

- NOTES
- PER REEL 1000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806, IEC 60286-3. (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END OF THE COLLAR.

HRS

DRAWING NO.	EDC-317292-58-00
PART NO.	DF40HC(3.0)-50DS-0.4V(58)
CODE NO.	CL0684-4099-2-58

2/2