


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

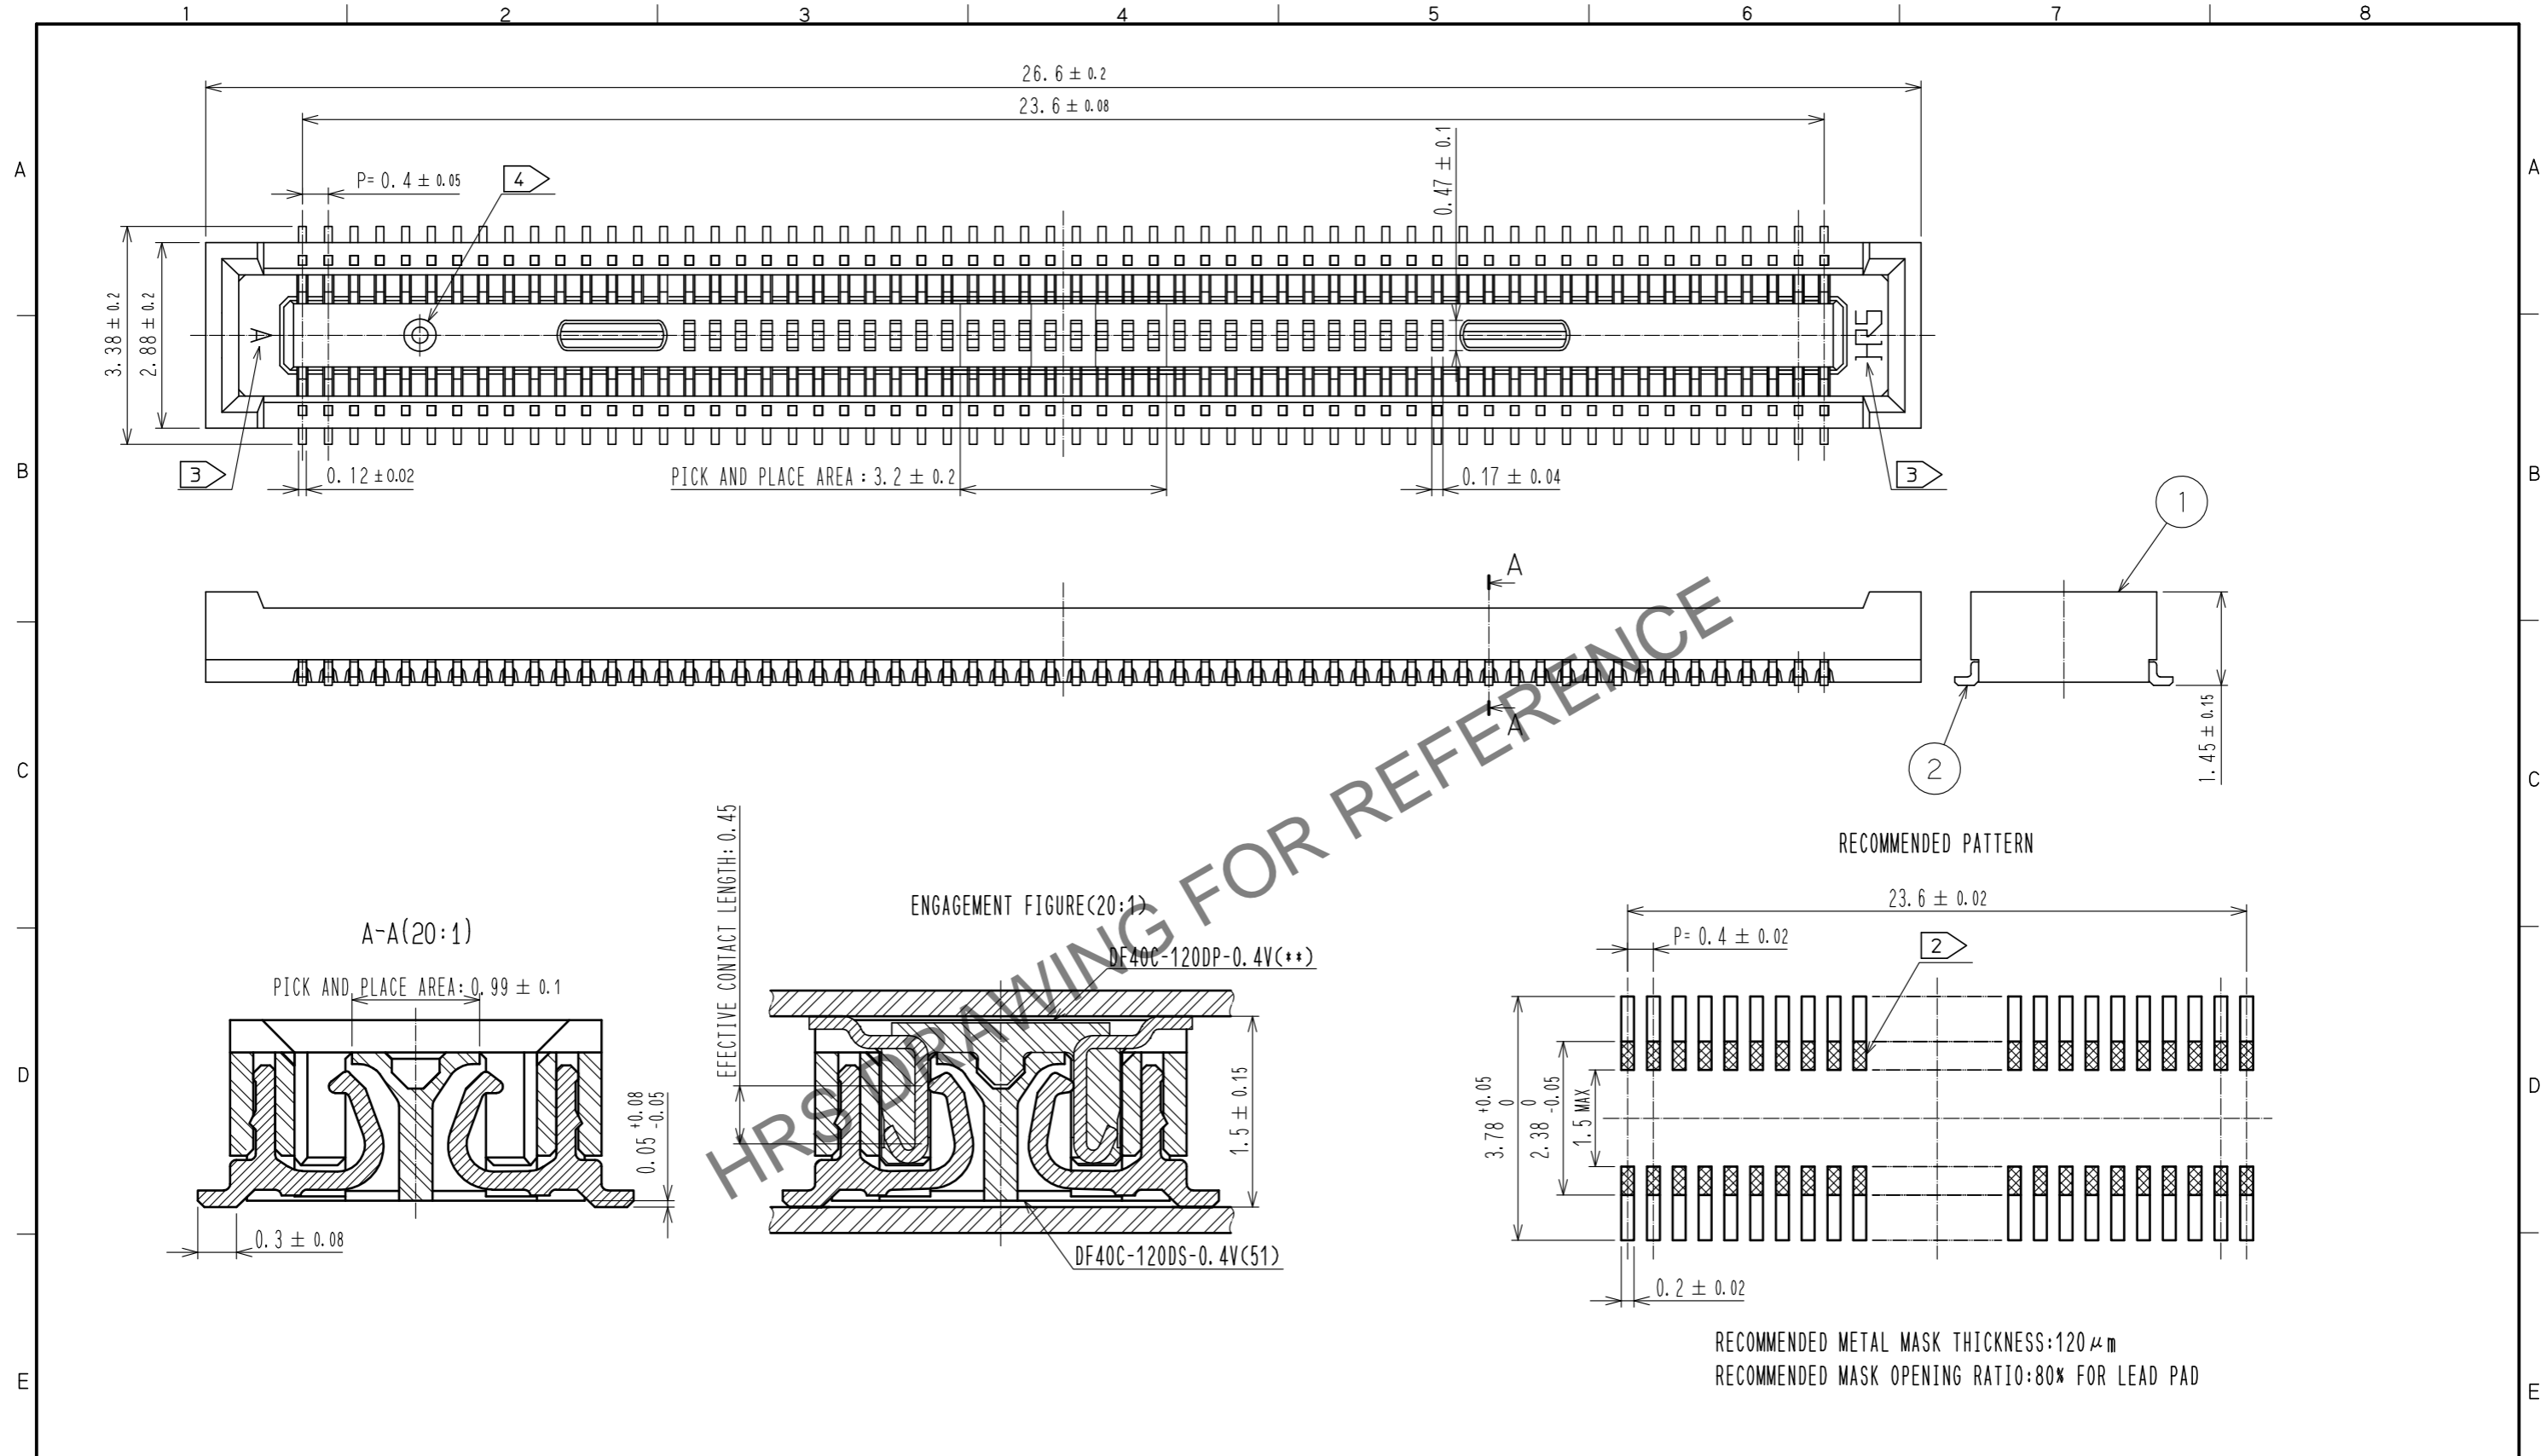

- NOTES)
1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
 2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
 3. HRS MARK AND CAV NO. IS INDICATED IN APPROXIMAL POSITION SHOWN.
 4. GATE POSITIONS IS POSITIONED IN APPROXIMAL AREA SHOWN.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD $0.05 \mu\text{m}$ MIN	6	PS	CLEAR	REINFORCEMENT COLLAR	
		SMT LEAD: GOLD $0.05 \mu\text{m}$ MIN	5	PS	BLACK		
		UNDERPLATING: NICKEL $1 \mu\text{m}$ MIN	4	POLYESTER	CLEAR	COVER TAPE	
1	LCP	BLACK, UL94V-0	3	PS	CLEAR	EMBOSSED CARRIER TAPE	

OVER	TO	TOLERANCE	UNITS	ANGULAR	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
6	18	± 0.3	mm	10 : 1		APPROVED : WR. FUKUCHI	20191121		
6	18	± 0.5	mm	$\pm 1^\circ$		CHECKED : TS. MIYAZAKI	20191121		
18	50	± 0.7	mm			DESIGNED : RH. KAGAMI	20191121		
50	125	± 1	mm			DRAWN : RH. KAGAMI	20191121		

ASSEMBLY DRAWING	DRAWING NO. EDC-317850-51-00
	PART NO. DF40C-120DS-0.4V(51)
	CODE NO. CL684-4108-1-51

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

