

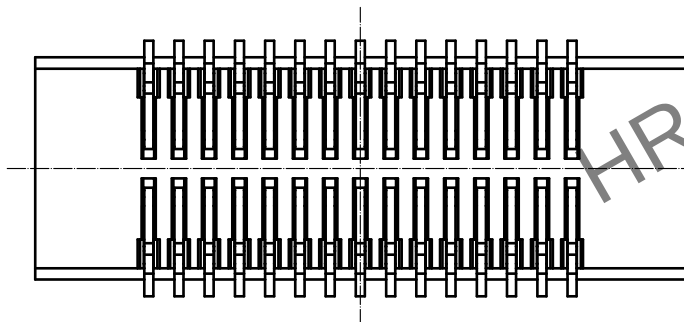
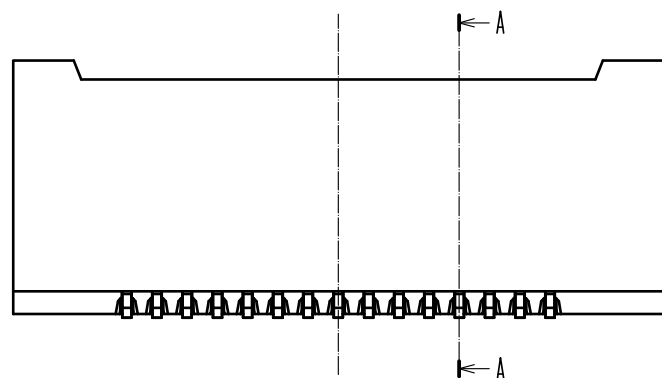




May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

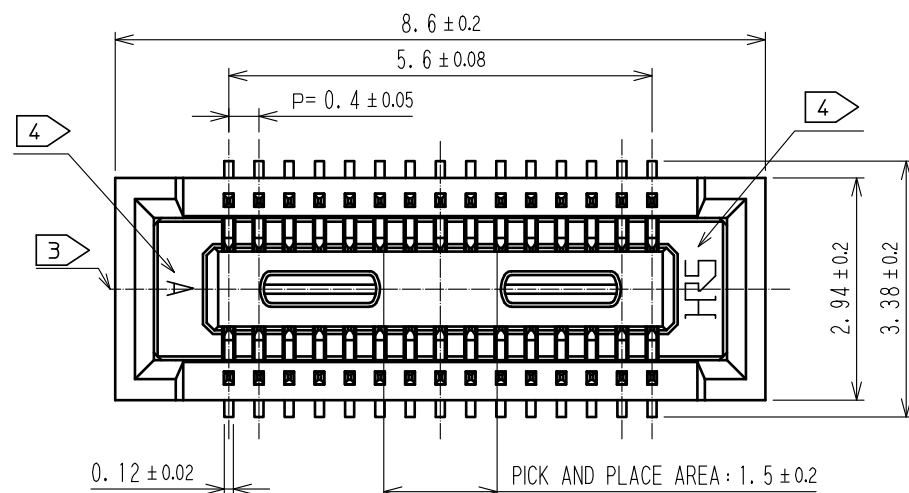


NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.
4. HRS MARK AND CAV NO. IS INDICATED IN APPROX POSITION SHOWN.

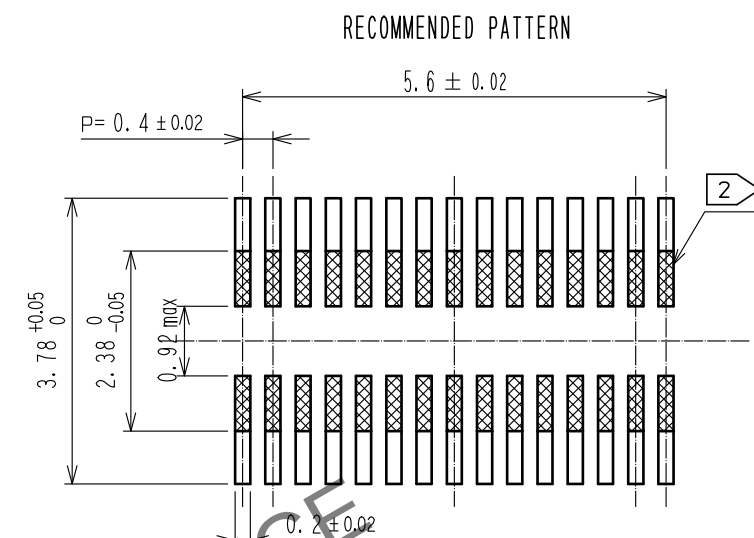

RECOMMENDED METAL MASK THICKNESS : $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

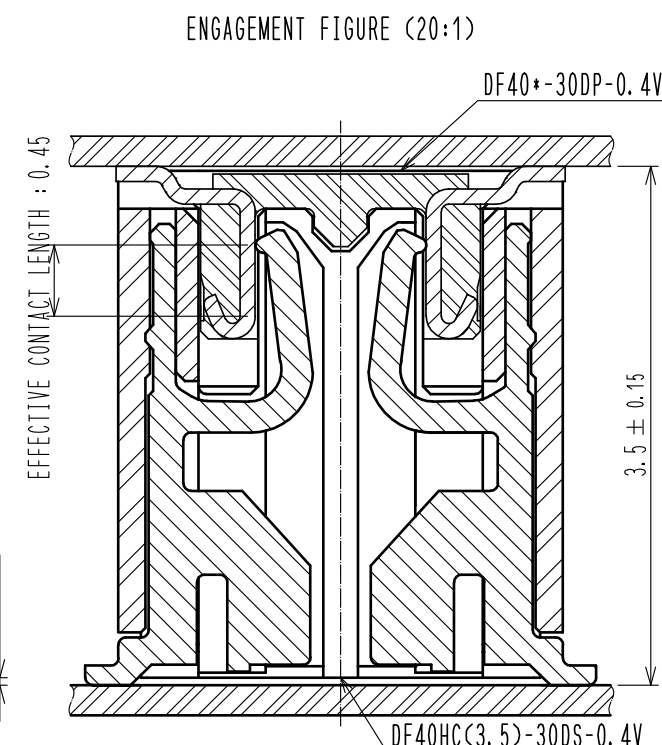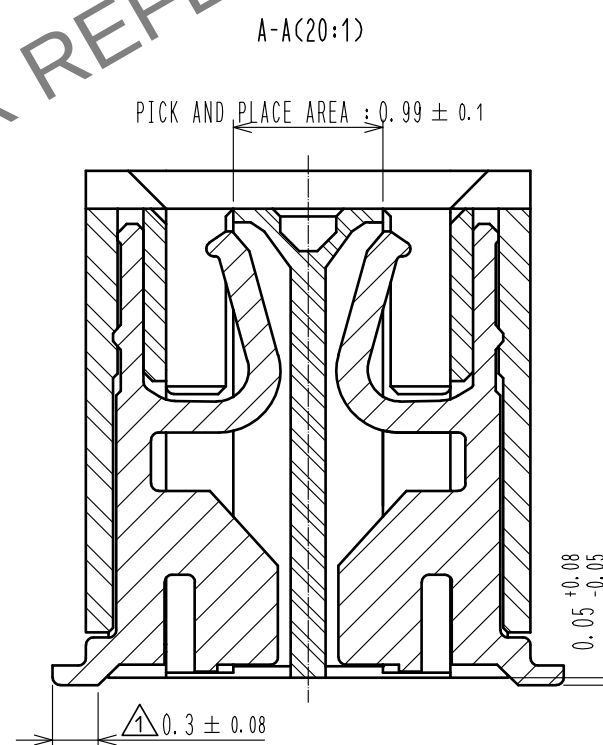

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR			
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK			
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE			
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 10 : 1	 COUNT 5	DESCRIPTION OF REVISIONS DIS-H-00009450		DESIGNED RH. KAGAMI	CHECKED YK. SATAKE	DATE 20210527
 HIROSE ELECTRIC CO., LTD.		APPROVED :MO. ISHIDA	20161005		DRAWING NO. EDC-321699-58-01			
		CHECKED :TS. MIYAZAKI	20161005		PART NO. DF40HC<3.5>-30DS-0.4V<58>			
		DESIGNED :SH. HOSODA	20161005		CODE NO. CL0684-4136-7-58			
		DRAWN :SN. NUMAZAKI	20161004		 			

