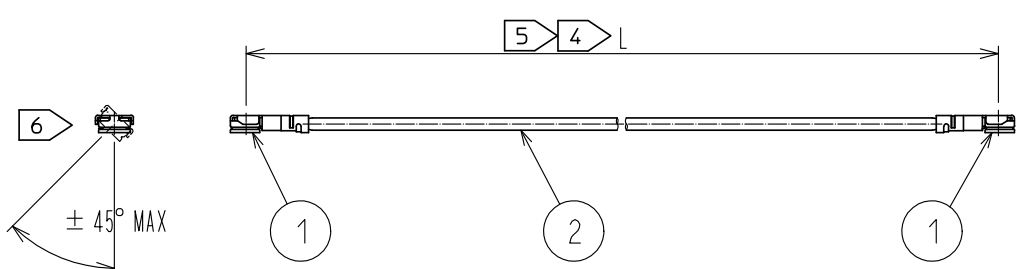
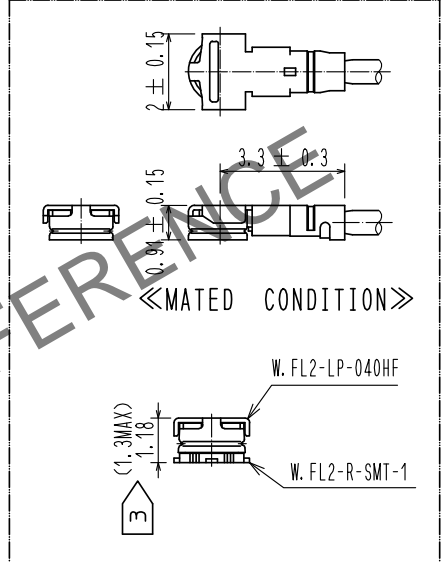
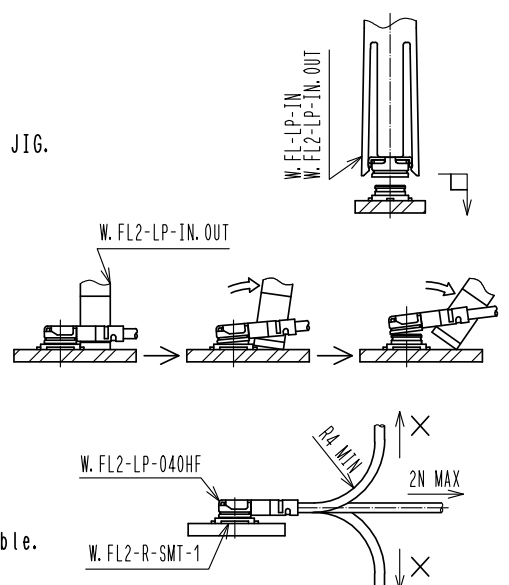


1		2		3		4											
																	
				<table border="1"><thead><tr><th>Part No.</th><th>Cable color</th></tr></thead><tbody><tr><td>~044*1TS~</td><td>WHITE</td></tr><tr><td>~044*2TS~</td><td>BLACK</td></tr></tbody></table>				Part No.	Cable color	~044*1TS~	WHITE	~044*2TS~	BLACK				
Part No.	Cable color																
~044*1TS~	WHITE																
~044*2TS~	BLACK																
NOTE 1. Please place an order as the assembled product.				【 DIMENSIONS OF CONNECTOR 】													
2. There is no compatibility between W.FL series and W.FL2 series.																	
3. The drawing shows mated connector height only.																	
4. We indicate the length of the harness on the last of product name, 'L' part.																	
5. Tolerance for [L]																	
<table border="1"><thead><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>35 ≤ L ≤ 200</td><td>±4</td></tr><tr><td>200 < L ≤ 500</td><td>±8</td></tr><tr><td>500 < L ≤ 1000</td><td>±12</td></tr><tr><td>1000 < L</td><td>±1.5%</td></tr></tbody></table>				Length L [mm]	Tolerance [mm]	35 ≤ L ≤ 200	±4	200 < L ≤ 500	±8	500 < L ≤ 1000	±12	1000 < L	±1.5%				
Length L [mm]	Tolerance [mm]																
35 ≤ L ≤ 200	±4																
200 < L ≤ 500	±8																
500 < L ≤ 1000	±12																
1000 < L	±1.5%																
6. Connector rotation angle is within ±45 degree from the above image. For long length in the case of L>150, the angle is optional.																	
7. Specifications are subject to change without notice.																	
【 PRECAUTIONS FOR HANDLING 】																	
<p>◆ Connector insertion and extraction</p> <p>a. Insert the connector as perpendicularly to the mating surface as possible with aligning the mating axes of both connectors by specialised insertion JIG. Part No. :W.FL-LP-IN<CL331-0323-2> or W.FL2-LP-IN.OUT<CL331-0321-7> Do not excessively slant the connectors when inserting.</p> <p>b. Connector shall be extracted by specialised extraction JIG. Part No. :W.FL2-LP-IN.OUT Never hold the cable when extracting the Cable because it damages the connector.</p> <p>◆ Allowable loads on the cable after the connectors are mated. The right figures show the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable.</p>																	
																	
1 W.FL2-LP-040HF(06)		CL331-0311-3-06		2 0.64 Dia. coaxial cable		HALOGEN FREE											
No.	Part No.	Code No.		No.	Part No.												
UNITS mm		SCALE FREE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED										
F		APPROVED :NK. NINOMIYA 20190717		DRAWING NO.													
		CHECKED :NK. NINOMIYA 20190717		PART NO.													
HIROSE ELECTRIC CO., LTD.		DESIGNED :MK. INOUE 20190717		WFL2-2HF6-044**TS-A-L 4													
		DRAWN :MK. INOUE 20190717		CODE NO.													
				1 1													

FORM HC0011-5-51