

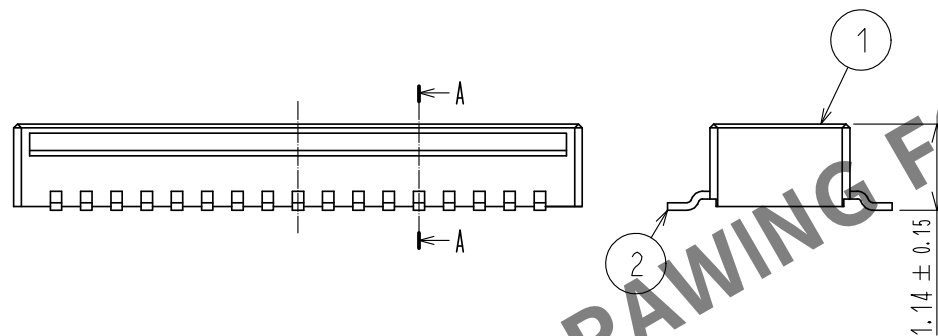



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

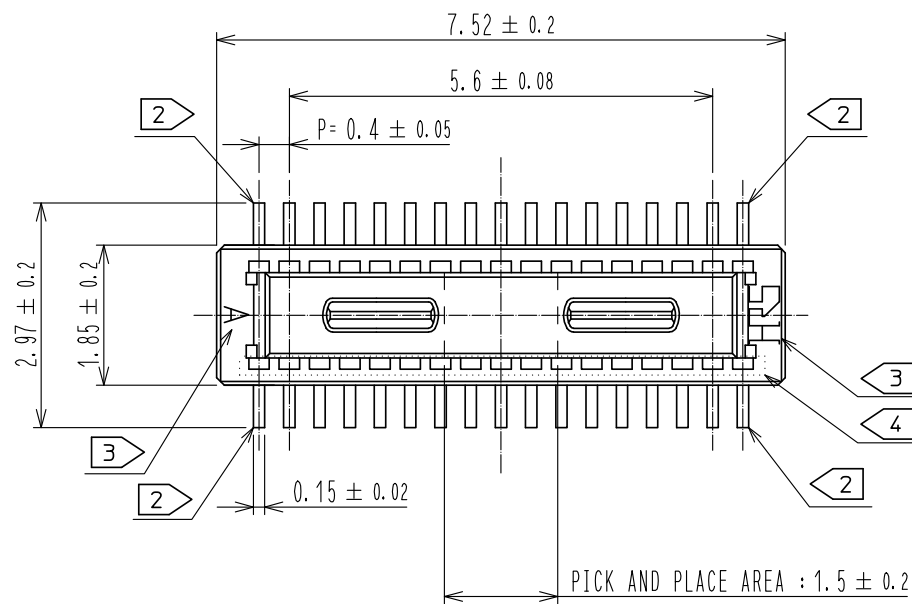


RECOMMENDED PATTERN

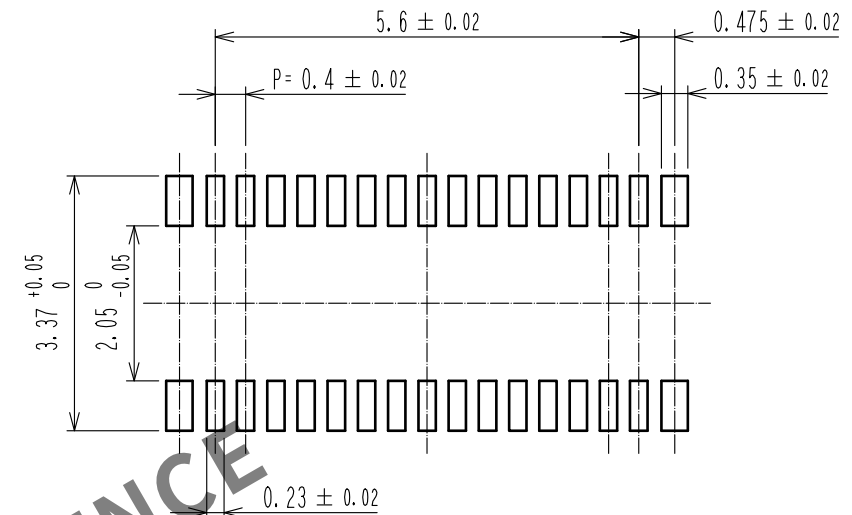

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO: 80% FOR LEAD PAD

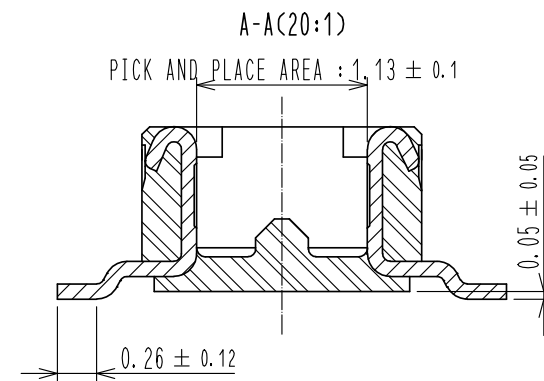

- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
2. EACH ONE CONTACT AT 4 CORNERS SHALL BE USED AS METAL HOLD DOWN.
3. HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
4. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

2	COPPER ALLOY	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR			
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK			
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE			
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :WR. FUKUCHI	20210303	DRAWING NO.	EDC-386694-58-00			
		CHECED : TS. MIYAZAKI	20210303	PART NO.	DF40TC-30DP-0.4V(58)			
		DESIGNED :YK. SATAKE	20210303	CODE NO.	CL0684-4263-0-58			
		DRAWN :YK. SATAKE	20210303	 1/2				

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

