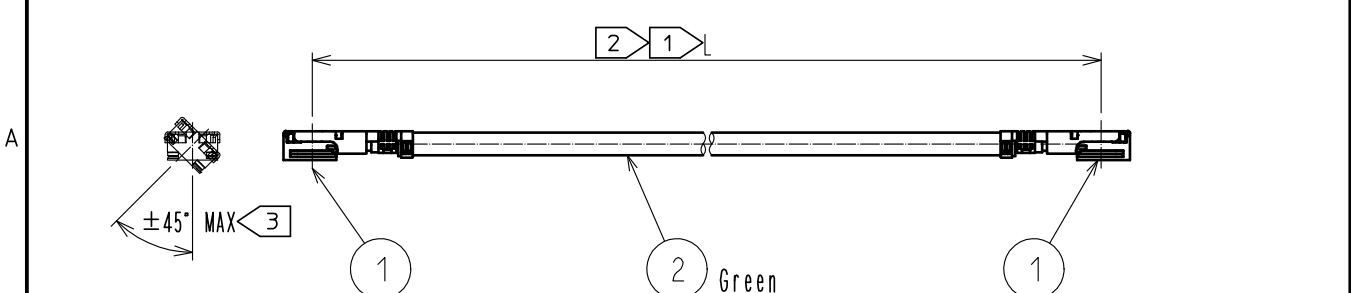
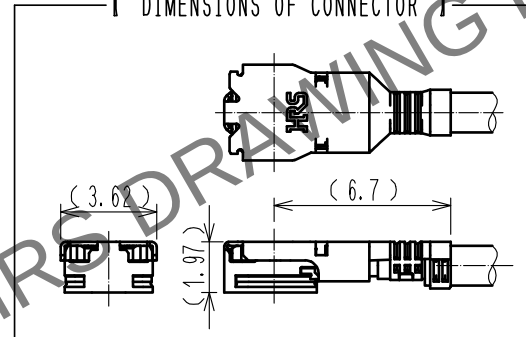
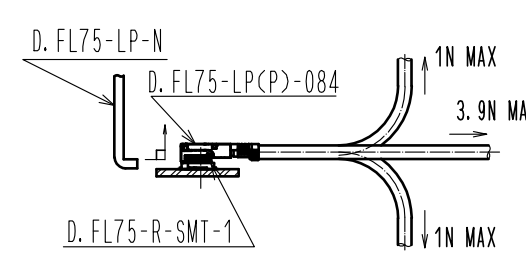
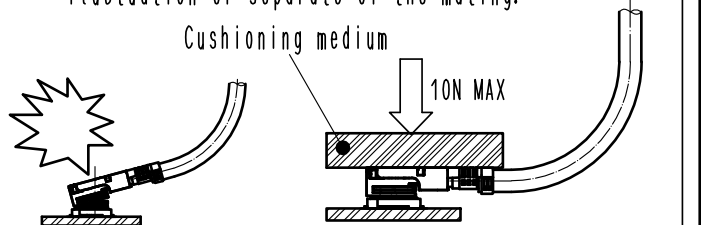


1		2		3		4											
																	
NOTE 1 We indicate the length of the harness on the last of product name. 'L' part. 2 Tolerance for [L] <table border="1"><thead><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>50 ≤ L ≤ 200</td><td>±4</td></tr><tr><td>200 < L ≤ 500</td><td>±8</td></tr><tr><td>500 < L ≤ 1000</td><td>±12</td></tr><tr><td>1000 < L</td><td>±1.5%</td></tr></tbody></table> 3 Connector rotation angle is within ±45 degree from the above image. For long length in the case of L>500, the angle is optional. 4. Specifications are subject to change without notice.								Length L [mm]	Tolerance [mm]	50 ≤ L ≤ 200	±4	200 < L ≤ 500	±8	500 < L ≤ 1000	±12	1000 < L	±1.5%
Length L [mm]	Tolerance [mm]																
50 ≤ L ≤ 200	±4																
200 < L ≤ 500	±8																
500 < L ≤ 1000	±12																
1000 < L	±1.5%																
PRECAUTIONS FOR HANDLING ◆ Connector insertion and extraction a. Connector shall be extracted vertically by specialised extraction JIG. Part No.: D.FL75-LP-N Never hold the cable when extracting the cable because it damages the connector. b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting. ◆ Allowable loads on the cable after the connectors are mated. The left figure below show the maximum allowable load on the cable. Do not apply loads exceeding these values to the cable. ◆ Please don't apply the power of the direction which lifts a cable. There is a danger that the inserted-in plug will Separate. When you perform wiring which curves a cable as shown in the middle figure below, please be careful. ◆ In the case of short products (100mm or less) or when the cable is bent during routing, it is recommended to press a cushioning medium (10N or less) on the back of the plug after mating in order to avoid the risk of characteristic fluctuation or separate of the mating.																	
DIMENSIONS OF CONNECTOR 																	
																	
																	
HALOGEN FREE																	
1 D.FL75-LP(P)-084		CL331-0078-0-00		2 1.5Dia coaxical cable (Green)													
NO. PART NO.		CODE NO.		NO. PART NO.													
UNITS mm		SCALE FREE		COUNT 1		DESCRIPTION OF REVISIONS											
						DIS-D-00010015											
APPROVED : NK. NINOMIYA		20200131		DRAWING NO.													
CHECKED : NK. NINOMIYA		20200131		PART NO.		DFL75-2LPP-084N9D-A-L											
DESIGNED : YK. KIUCHI		20200131		CODE NO.													
DRAWN : YK. KIUCHI		20200131															
FORM HC0011-5-51		2		3		4											