

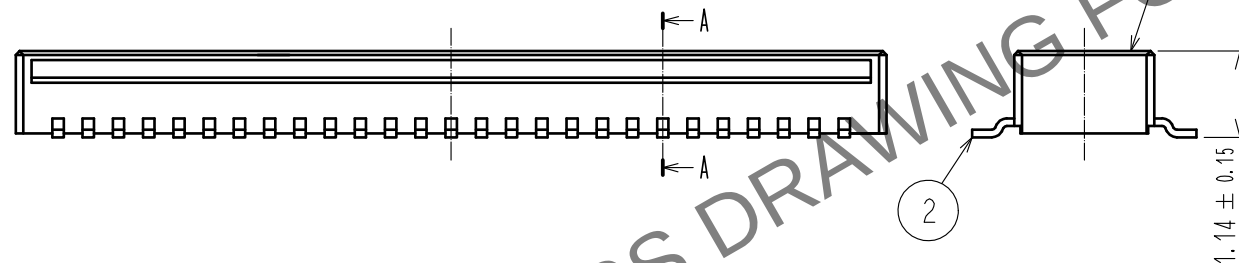



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

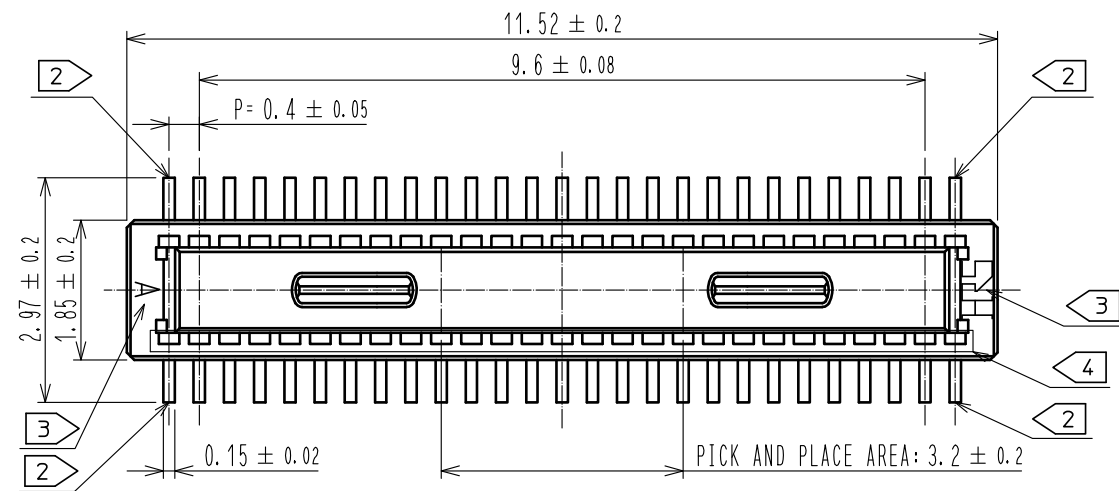

- NOTES)
1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
 2. EACH ONE CONTACT AT 4 CORNERS SHALL BE METAL HOLD DOWN.
 3. HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.
 4. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

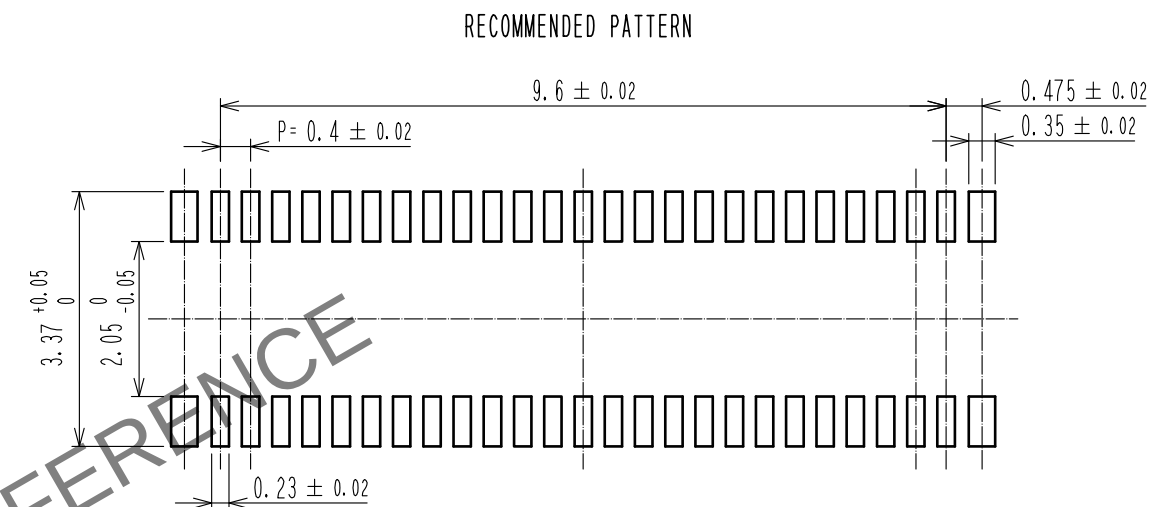

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO: 80% FOR LEAD PAD

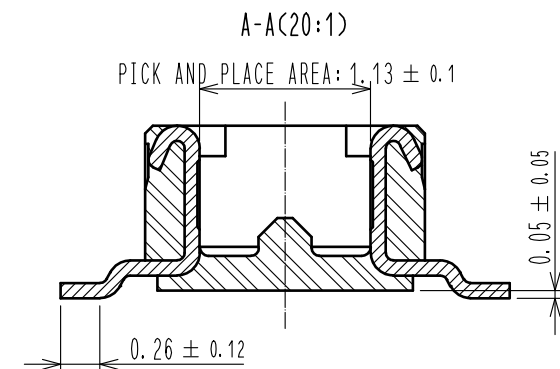

2	COPPER ALLOY	CONTACT AREA: GOLD $0.05 \mu\text{m}$ MIN	5	PS	BLACK
		SMT LEAD: GOLD $0.05 \mu\text{m}$ MIN			
		UNDERPLATING: NICKEL $1 \mu\text{m}$ MIN			
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 10 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : WR. FUKUCHI	20200204	DRAWING NO. EDC-386792-51-00	
		CHECKED : TS. MIYAZAKI	20200204	PART NO. DF40TC-50DP-0.4V(51)	
		DESIGNED : YK. SATAKE	20200203	CODE NO. CL684-4268-0-51	
		DRAWN : YK. SATAKE	20200203	1/2	

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

