


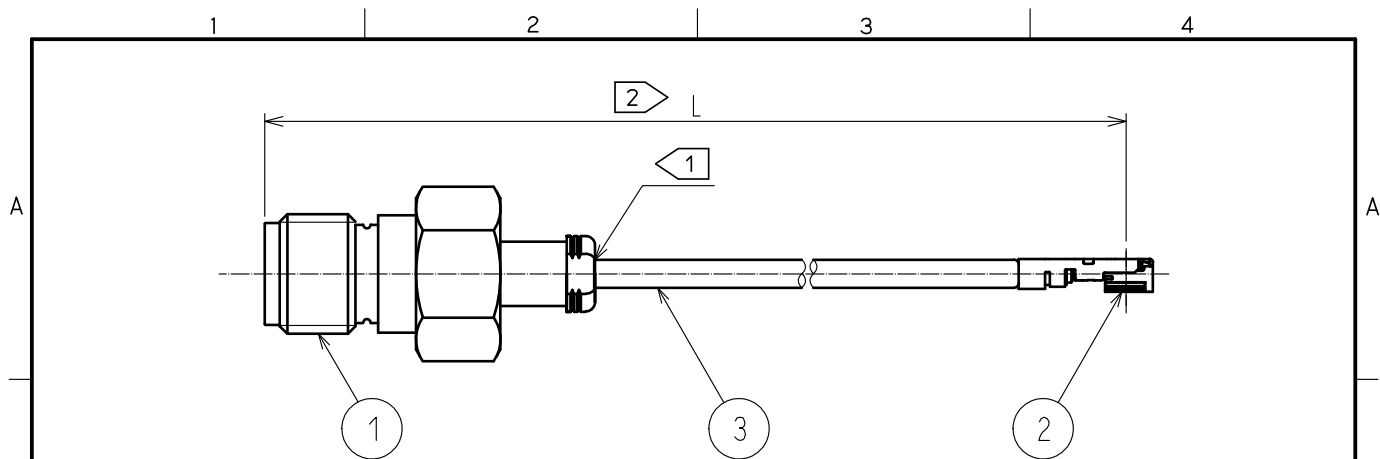

NOTE 1 Do not apply any excessive stress to the cable assembly position.


2 We indicate the length of the harness on the last of product name. 'L' part.

Tolerance for [L]

Length L [mm]	Tolerance [mm]
$50 \leq L \leq 200$	± 4
$200 < L \leq 400$	± 8

Part No.	Cable color
~088Y1T~	GRAY
~088Y2T~	BLACK

[DIMENSIONS OF CONNECTOR]

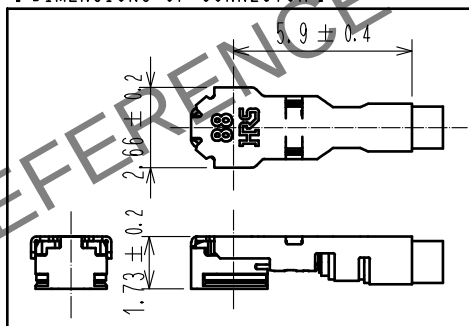

3. Specifications are subject to change without notice.

[PRECAUTIONS FOR HANDLING]

1. Connector insertion and extraction

(1) Insert the connector as perpendicularly to the mating surface as possible with aligning the mating axes of both connectors by specialised insertion JIG. Part No.: U.FL(A)-LP-IN.OUT (CL331-2401-0) (fig.1)

◆ Do not excessively slant the connectors when inserting.




(2) Connector shall be extracted by specialised extraction JIG. Part No.: U.FL(A)-LP-IN.OUT (CL331-2401-0) (fig.2)

◆ Never hold the cable when extracting the cable because it damages the connector.

2. Allowable loads on the cable after the connectors are mated.

The below figures show the maximum allowable loads on the cable. (fig.3)

◆ Do not apply loads exceeding these values to the cable.

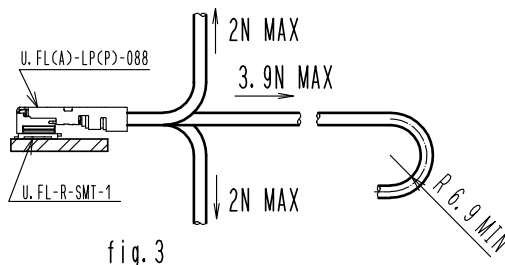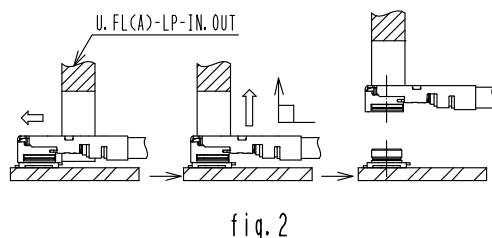

2	U.FL(A)-LP(P)-088	CL331-2400-0-00			
1	HRM(G)-200-088JBN	CL323-0960-0-00	3	RF-1.37/50 SY137/50	Shenyu Communication
N o.	PART NO.	CODE NO.	N o.	PART NO.	MANUFACTURER
UNITS mm		SCALE FREE	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00005051	DESIGNED MK. INOUE
					CHECKED TO. KATAYAMA
					DATE 20200616
APPROVED : TO. KATAYAMA 20200615			DRAWING NO.		
CHECKED : TO. KATAYAMA 20200615			PART NO.		
DESIGNED : MK. INOUE 20200615			CODE NO.		
DRAWN : MK. INOUE 20200615			1/1		