

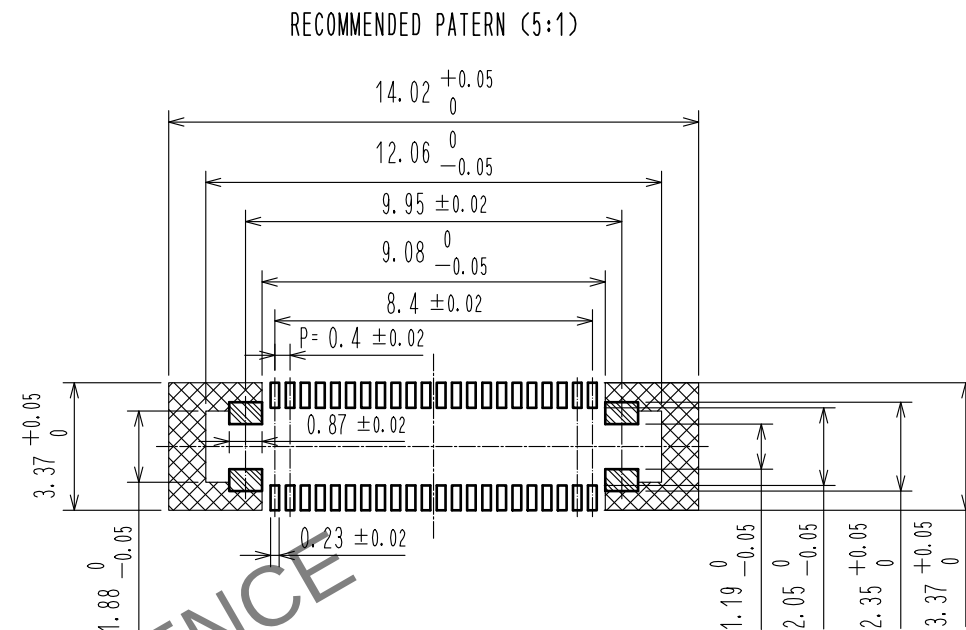

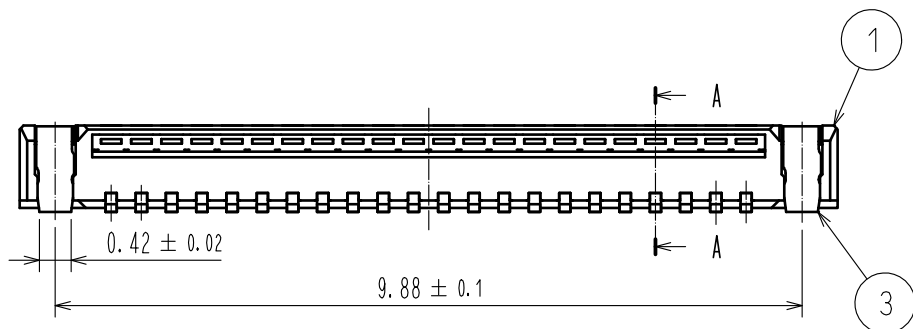


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

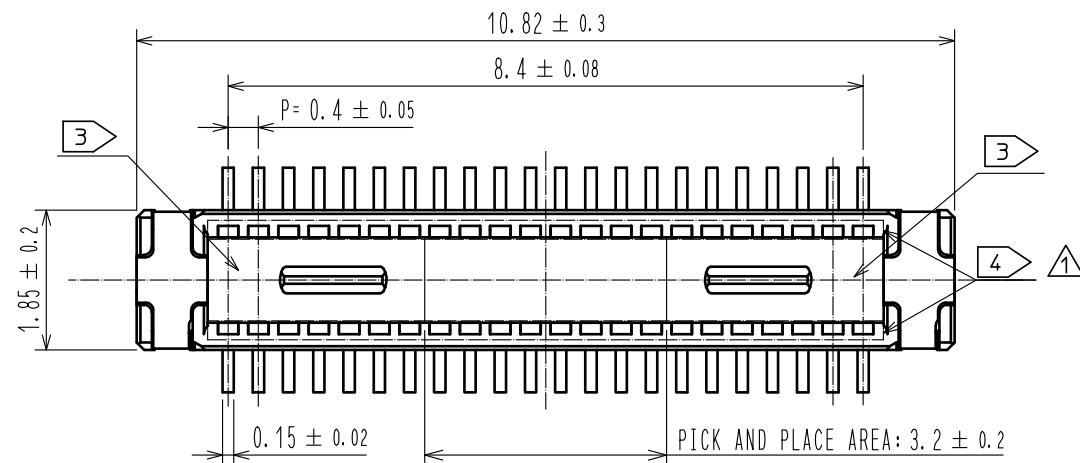

□ : SIGNAL ▨ : GROUND ▩ : NON-CONDUCTIVE AREA
RECOMMENDED METAL MASK THICKNESS : 120 μm
RECOMMENDED MASK OPENING RATIO : 80% FOR LEAD PAD

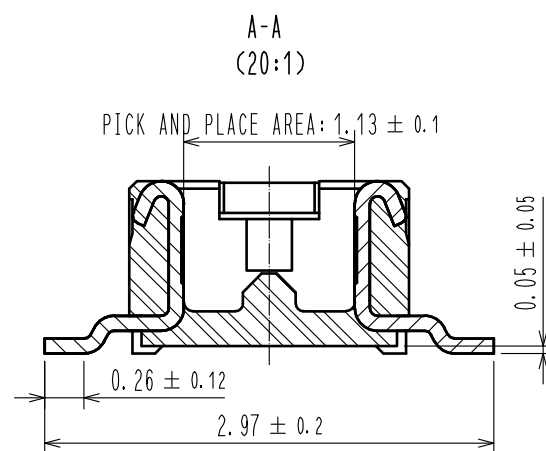


- NOTES
- ALL LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - PLATING SPECIFICATIONS

CONTACT AREA : GOLD 0.05 μm MIN

SMT LEAD : GOLD 0.05 μm MIN

UNDER PLATING : NICKEL 1 μm MIN

(SURFACE : SEALING)
 - HRS MARK AND CAV No. ARE INDICATED IN APPROX POSITION SHOWN.
 - THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA, BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

			7	PS	CLEAR(REINFORCEMENT COLLAR)					
3	STAINLESS STEEL	2	6	PS	BLACK(PLASTIC REEL)					
2	PHOSPHOR BRONZE	2	5	POLYESTER	CLEAR(COVER TAPE)					
1	LCP	BLACK , UL94 V-0	4	PS	CLEAR(EMBOSSED CARRIER TAPE)					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 10 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00006346	DESIGNED PAN YIWEI	CHECKED YK. SATAKE	DATE 20200928
 HIROSE ELECTRIC CO., LTD.				APPROVED :MO. ISHIDA 20150206		DRAWING NO. EDC-355294-51-02				
				CHECKED :WR. FUKUCHI 20150206		PART NO. DF40GL-44DP-0.4V(51)				
				DESIGNED :SJ. WADA 20150206		CODE NO. CL684-4412-2-51				
				DRAWN :SJ. WADA 20150206		 1/2				

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

