


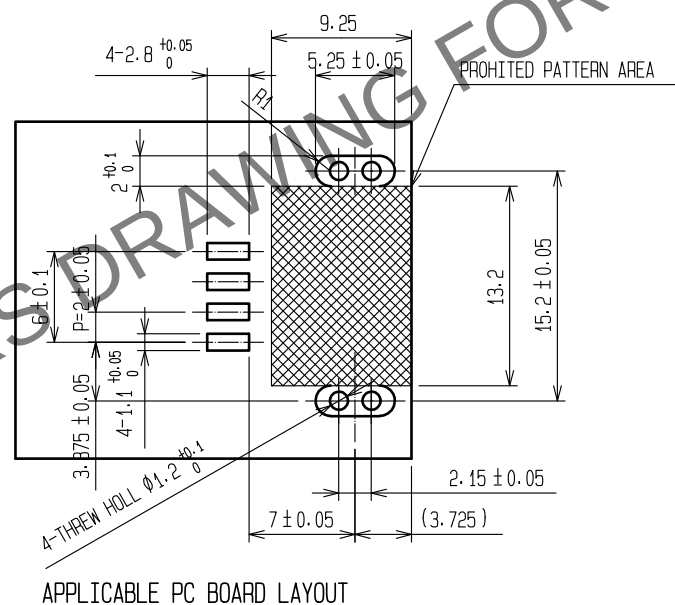

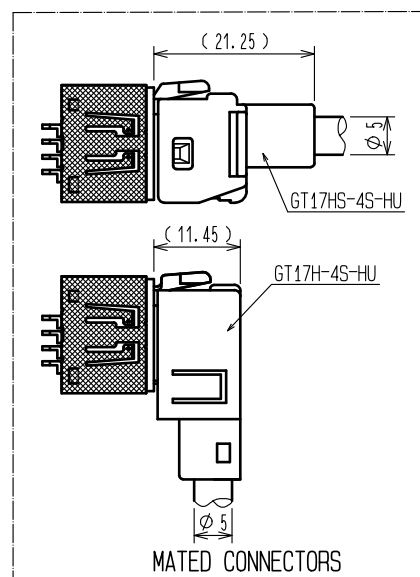


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


RoHS, ELV COMPLIANT

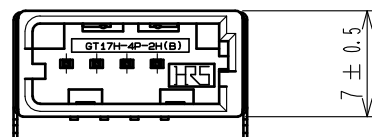

Material indication

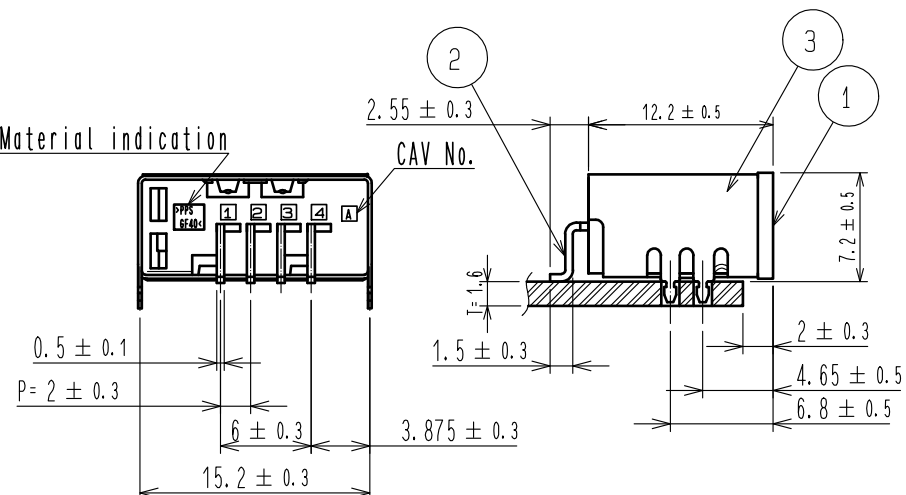


RECOMMENDED REFLOW PROFILE

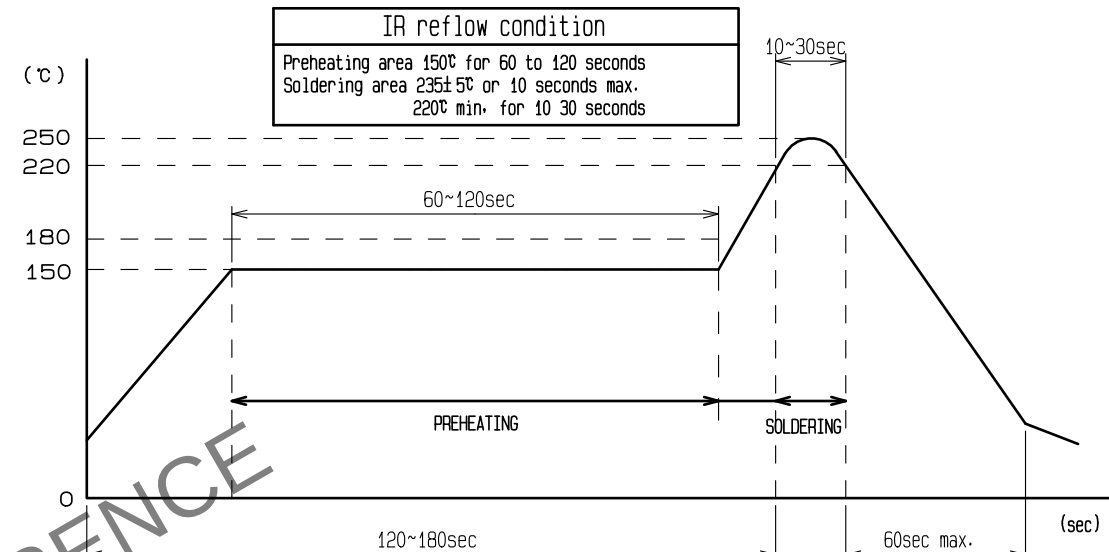

Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

PACKAGEING STYLE

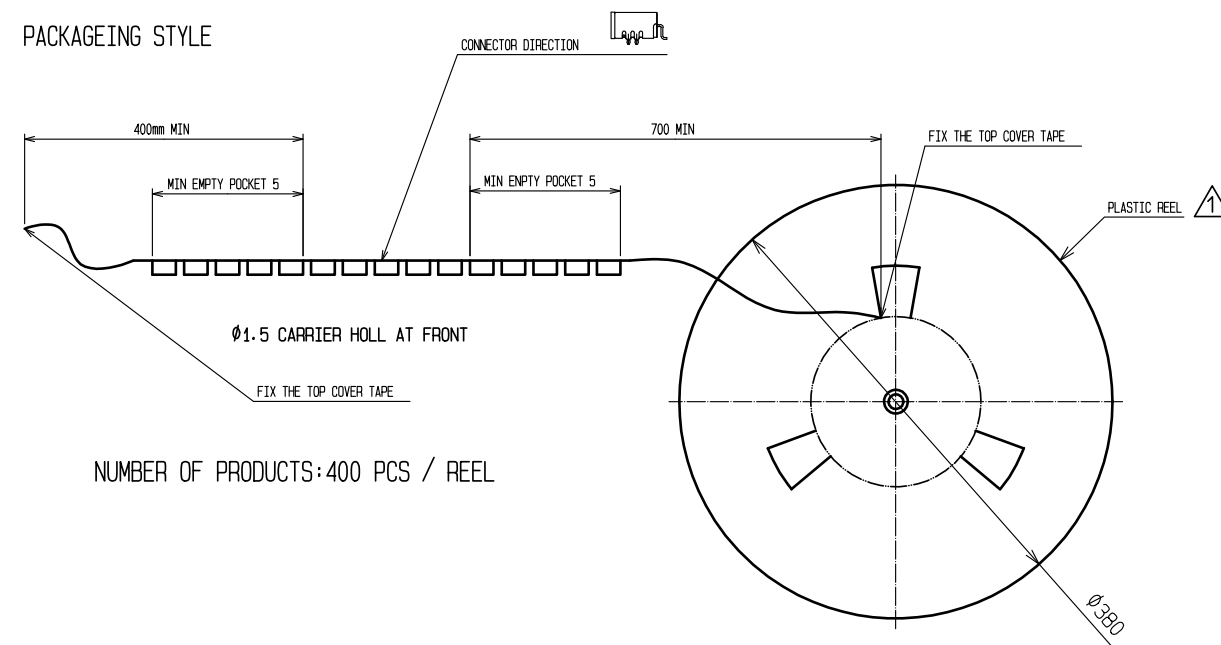

NUMBER OF PRODUCTS:400 PCS / REEL

CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	Ni 1μm + Sn PLATING 2μm	4		
1	PPS	GREEN	3	COPPER ALLOY	Sn PLATING 1μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006678	DESIGNED TS. KUBOTA
				CHECKED EJ. WAKATSUKI	DATE 20200909
				APPROVED : KI. HIROKAWA 20200326	DRAWING NO. EDC-166943-55-00
				CHECKED : EJ. WAKATSUKI 20200325	PART NO. GT17H-4P-2H(B)(55)
				DESIGNED : TS. KUBOTA 20200325	CODE NO. CL767-0171-9-55
				DRAWN : YK. MITSUISHI 20200219	