

## 1. Scope 2

This document specifies the cable assembly procedures of crimping the crimp contact to the cable (AWG#26 to 34) and inserting the contact to the crimp socket for DF57 Series.

## 2. Part Number 2

Part No.	Description
DF57-%SCF(##)	Crimp contact
DF57-%SCFA(##)	
DF57H-*S-1.2C(##)	Crimp socket
DF57AH-*S-1.2C(##)	

\*: Number of position

(##): Peculiar specification number

%;Applicable wire size

## 3. Cable Assembly Procedure

### 3.1. Cable Stripping


Follow the Crimping Quality Standard (ATAD-H0404), and strip the cable jacket. Make sure that there is no damage on the center conductor of the cable.

### 3.2. Crimping Process 2

Crimp the contact by using the applicator(AP105-DF57-2628S,AP105-DF57-2830S, AP105-DF57-3234S,AP105-DF57-2830SA). Confirm that the crimp height and configuration meet the crimp condition and Crimping Quality Standard (ATAD-H0404).

### 3.3. Crimped Contact Insertion to Crimp Socket

Hold the cable of crimped contact and insert to each contact cavity of the crimp socket. (Insertion direction is as shown below.)

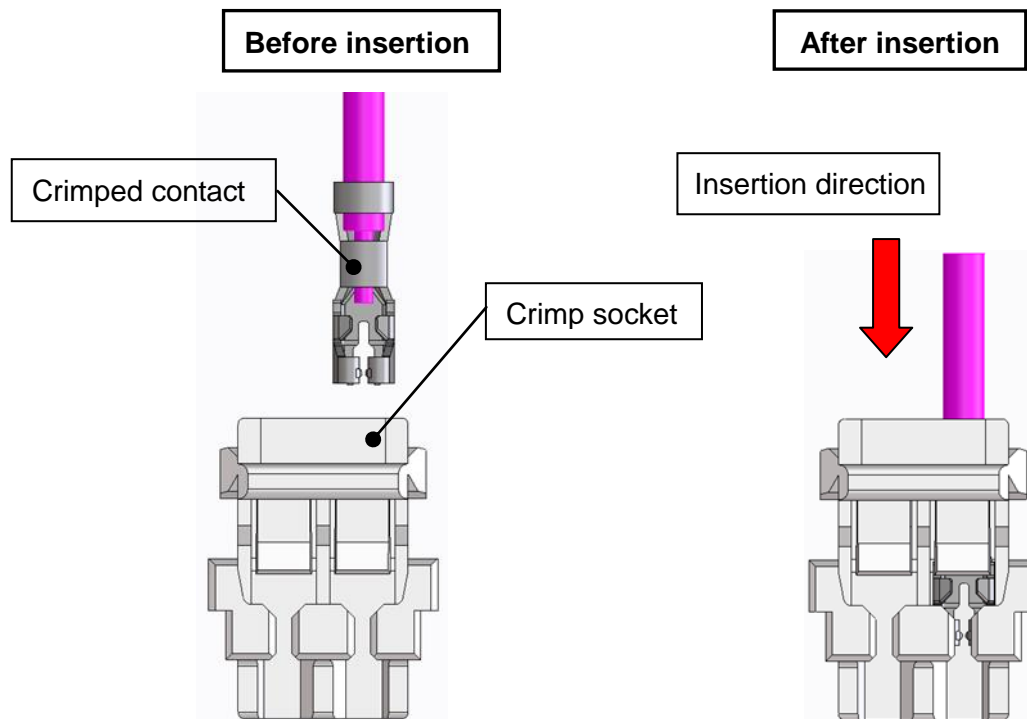


	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
<div><div></div><div>A</div></div>	5	DIS-H-00002257	TS.MIYAKI	HS.OKAWA	16.11.01	
TITLE  DF57 Series Cable Assembly Procedure				<div><div><div></div><div>HRS</div></div><div>HIROSE ELECTRIC CO., LTD.</div></div>		
				APPROVED	TS.SAKATA	10.03.18
				CHECKED	TS.FUKUSHIMA	10.03.18
				DESIGNED	TS.KUMAZAWA	10.03.18
				WRITTEN	TS.KUMAZAWA	10.03.18
TECHICAL SPECIFICATION				ETAD-H0421	<div><div></div><div>A</div></div> 1 / 3	


2

- Do not insert the crimped contact (DF57-%SCF(A)(##)) at an angle to the socket in order to avoid unexpected damage.  
Also, there is some deformation risk of crimped contact lance in case contact is wrenched at “not fully inserted” (to crimp socket) state.


#### Straight insertion (Correct)

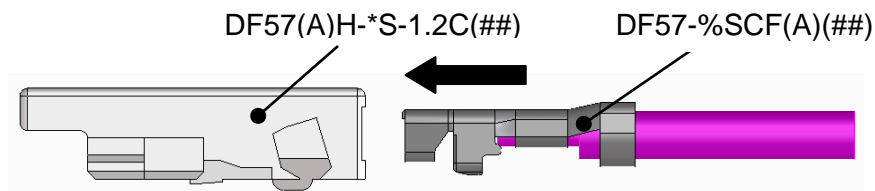

#### Angled insertion (Incorrect)

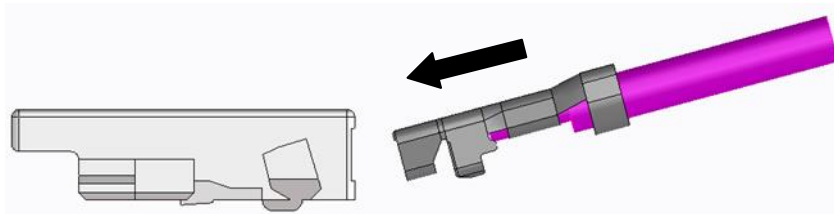


#### Scoop insertion (Incorrect)

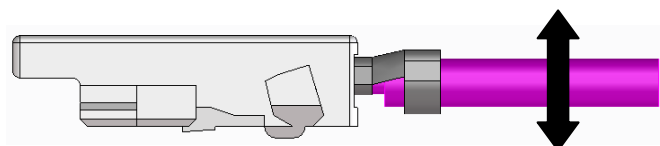


- After crimped contact insertion, please don't twist a cable excessively.

#### Twisted (Incorrect)

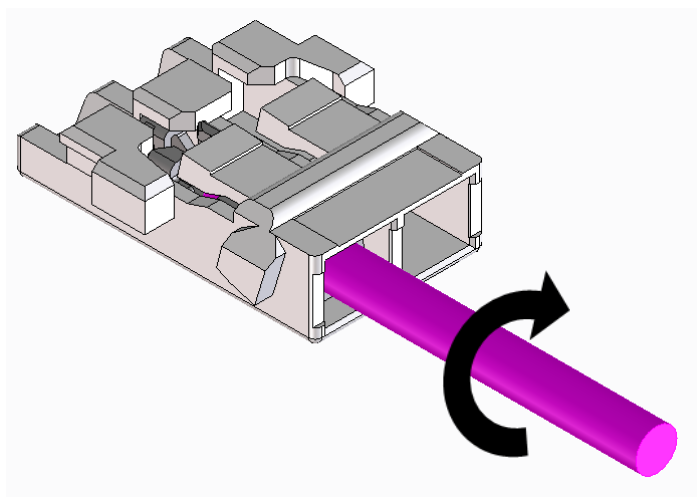

## Confirmation of instead contact conditions

Make sure that the contact lance is caught by the housing lance of the crimp socket.

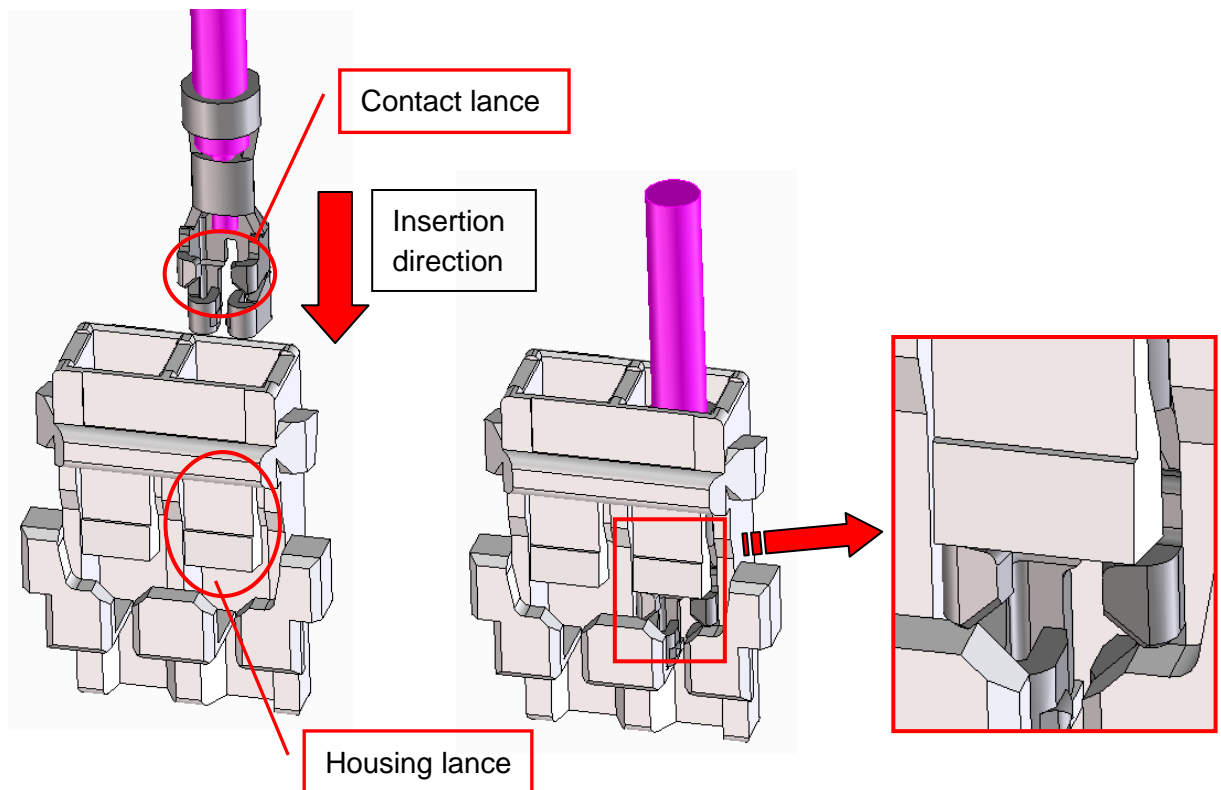

### 2 NOTE: Repairing the crimp contact

For removing the inserted contact form socket, lift up the housing lance by using DF-C-PO(B) or a pointed needle, and pull out the cable simultaneously. The repair operation could make the lance strength lower, therefore, please do not reuse the repaired crimp socket and replace it to a new one.

