

NOTE 1 We indicate the length of the harness on the last of product name, 'L' part.


2 Tolerance for [L]

L (mm)	STANDARD TOLERANCE
35 ≤ L ≤ 200	± 4 mm
200 < L ≤ 500	± 8 mm
500 < L ≤ 1000	± 12 mm
1000 < L	± 1.5% mm

3 Connector rotation angle is within ±45 degree from the above image.
For long length in the case of L>500, the angle is optional.


4. Specifications are subject to change without notice.

[DIMENSIONS OF CONNECTOR]

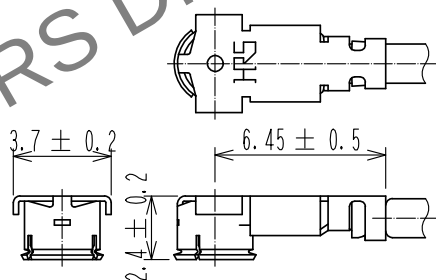

[PRECAUTIONS FOR HANDLING]

- ◆ Connector insertion and extraction
 - a. Connector shall be extracted vertically by specialised extraction JIG.
Part No.: H.FL-LP-NCCL Code: CL331-0551-7>
Never hold the cable when extracting the cable because it damages the connector.
 - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.



2	H.FL-LP CONTACT	CL331-0511-2		
1	H.FL-LP-DFS111-A(C01)	CL331-0507-5-01	3	1.5Dia. coaxial cable
NO.	PART NO.	CODE NO.	NO.	PART NO.

UNITS mm		SCALE FREE	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
APPROVED : NK. NINOMIYA 16.11.08				DRAWING NO. EDC-373621-00-00			
CHECKED : NK. NINOMIYA 16.11.08				PART NO. H.FL-2LP(A)-FHSB-A-L 1			
DESIGNED : KS. TAKAHASHI 16.11.08				CODE NO. CL321-5111-4-00 0 1/1			
DRAWN : KS. TAKAHASHI 16.11.08							