


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

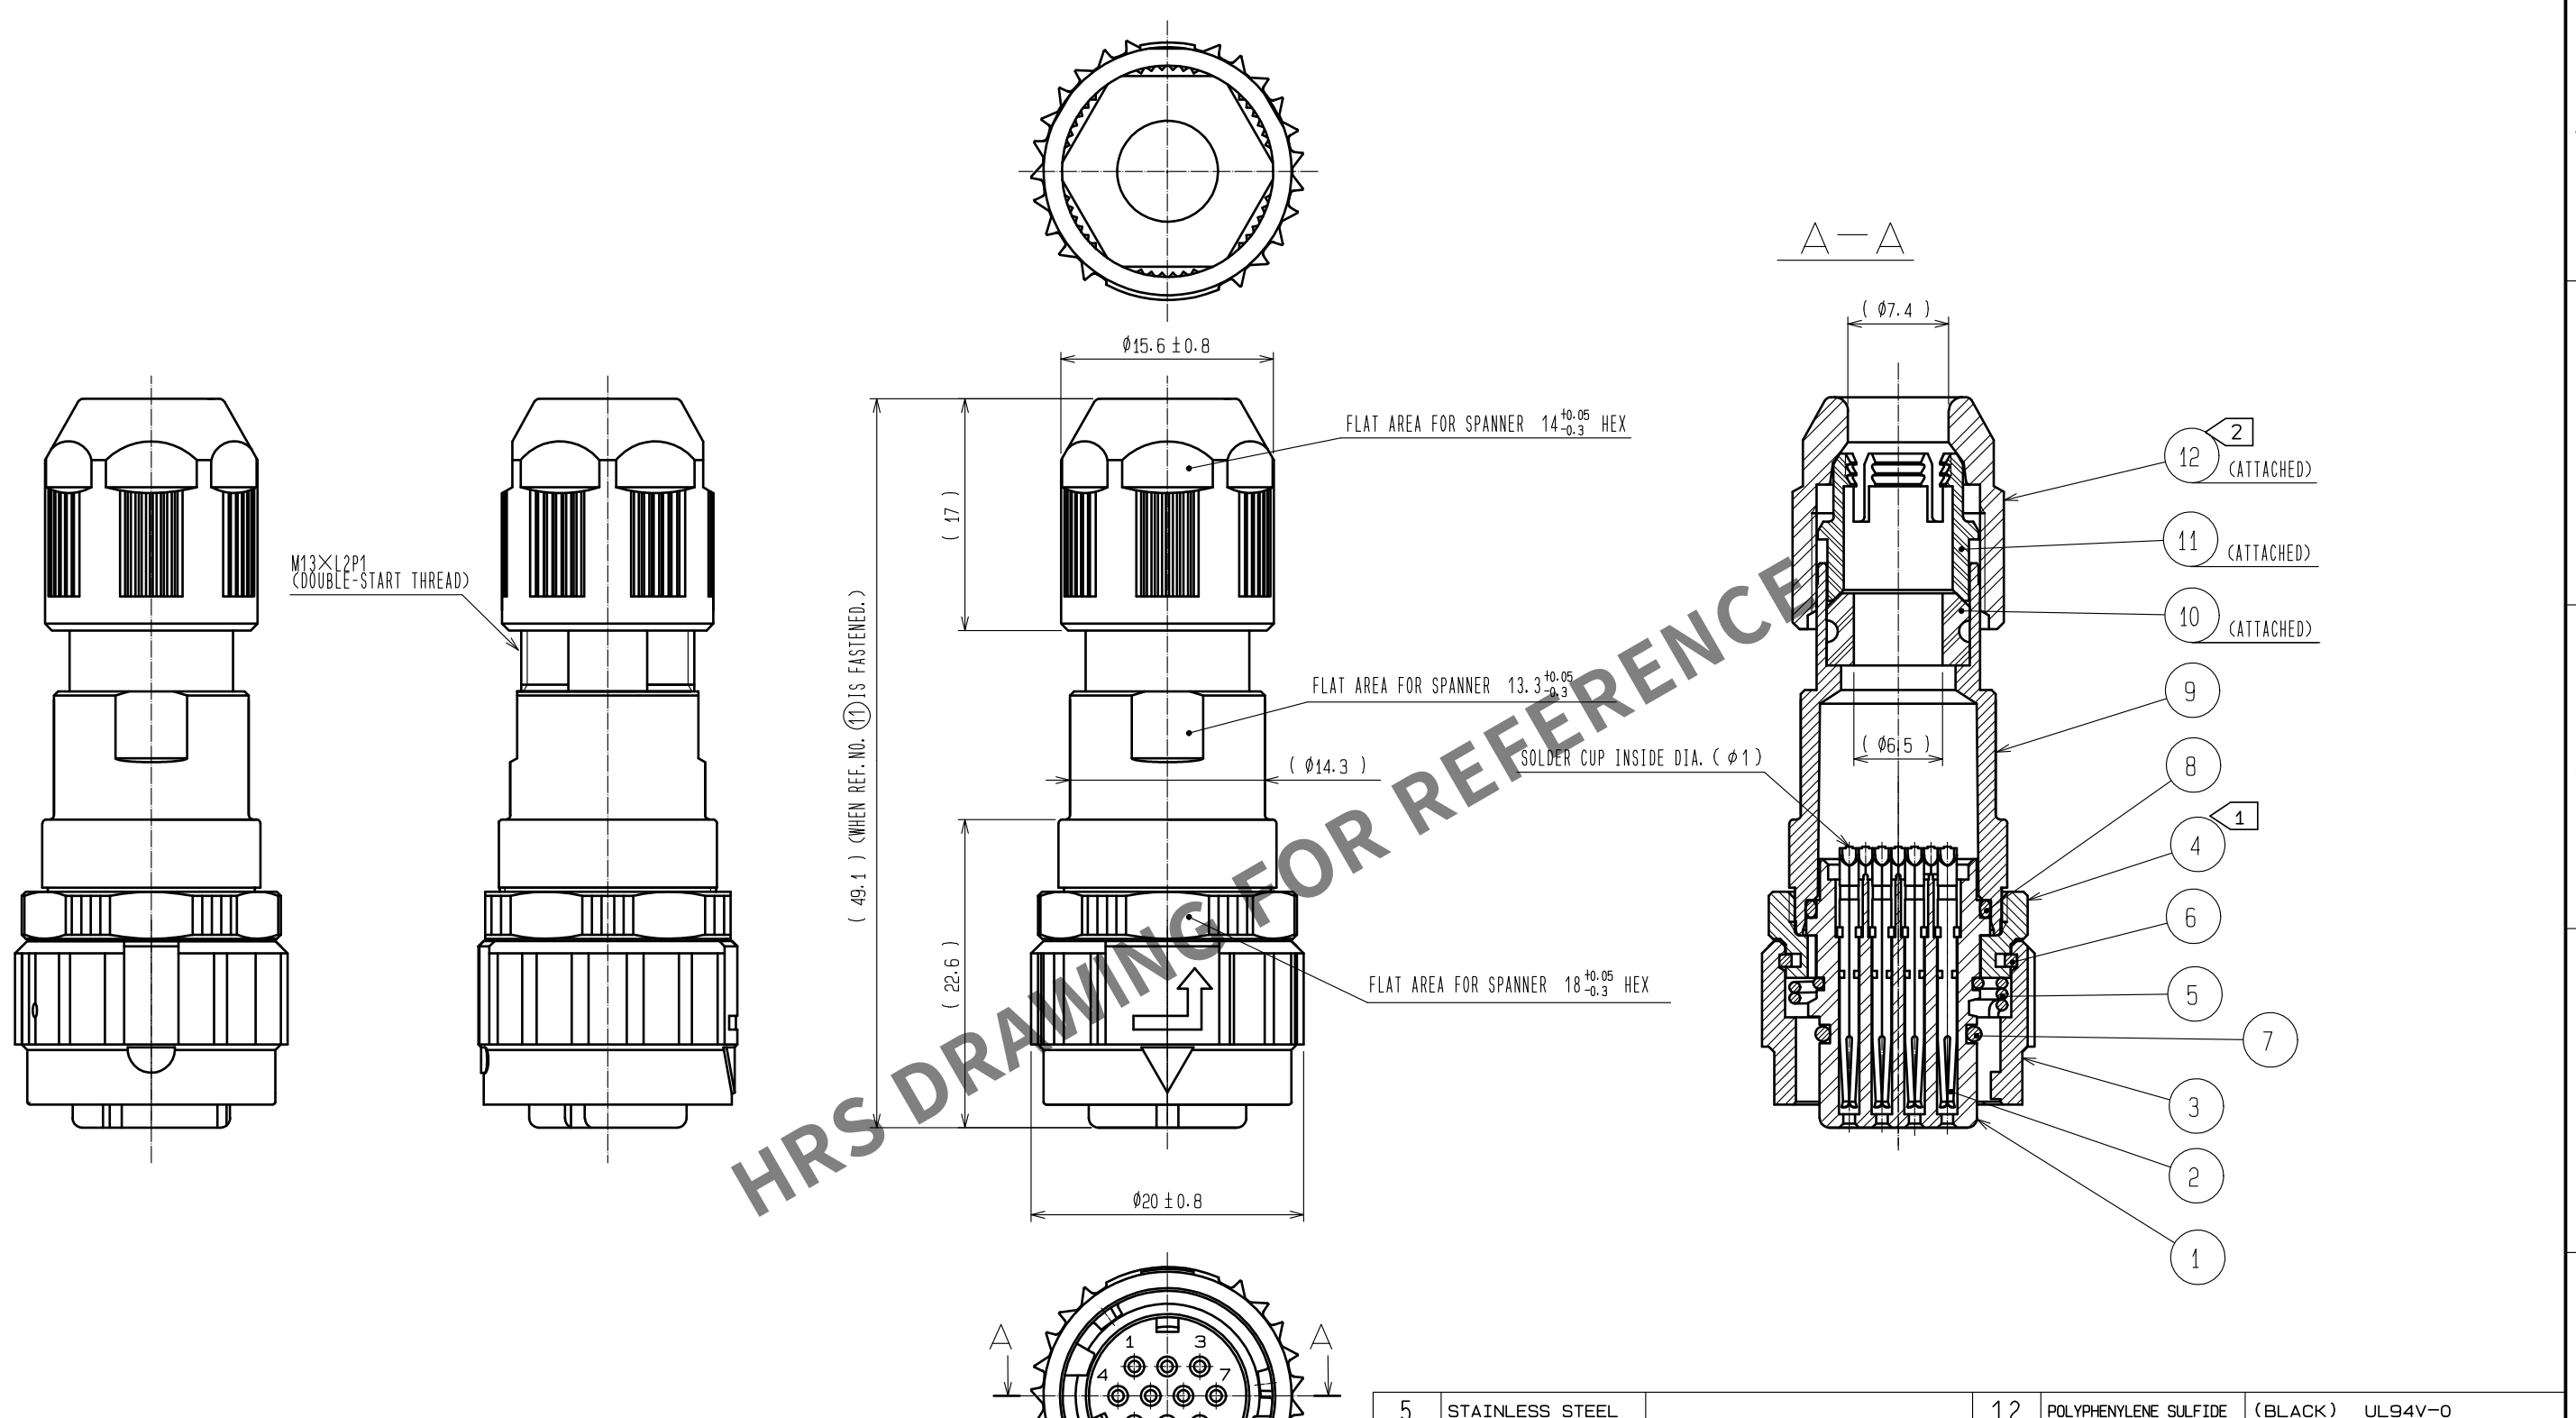

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ④: 0.9 TO 1 N·m.
THE RECOMMENDED ADHESIVE OF REF. NO. ④: LOCTITE 243 MADE BY HENKEL JAPAN LTD.

② THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. ⑫: 0.9 TO 1 N·m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF. NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.

③ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE	(WHITE)	UL94V-0
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
2	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.2μm min. TERMINAL AREA:GOLD FLASH. UNDER PLATING:NICKEL 2μm min.	9	ALUMINIUM ALLOY	NICKEL PLATING	
			8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
			7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
1	POLYPHENYLENE SULFIDE	(BLACK)	6	PHOSPHOR BRONZE	NICKEL PLATING	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	: HY. KOBAYASHI	18. 02. 26	DRAWING NO.	EDC-115624-31-00		
		CHECKED	: HY. KOBAYASHI	18. 02. 26	PART NO.	HR08D-12WPA-10S(31)		
		DESIGNED	: DS. MATSUNE	18. 02. 24	CODE NO.	CL108-0219-7-31		
		DRAWN	: AI. NISHIYAMA	18. 02. 16				