
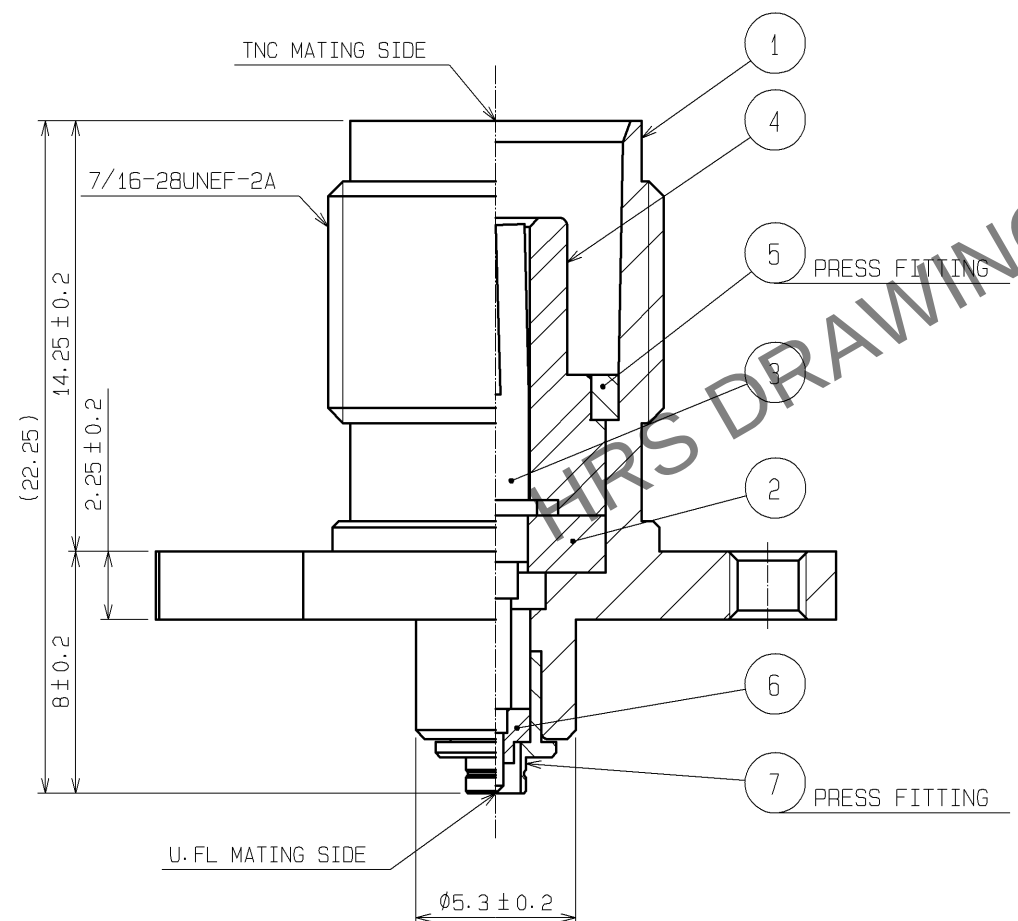
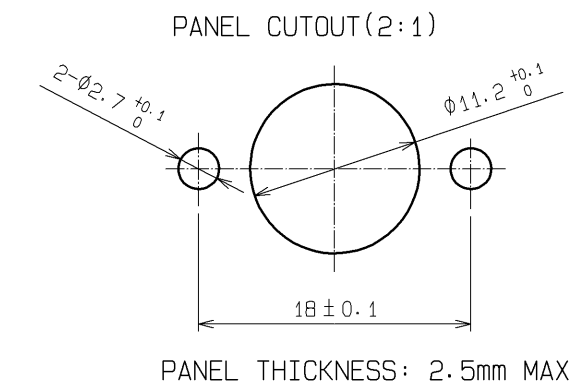


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

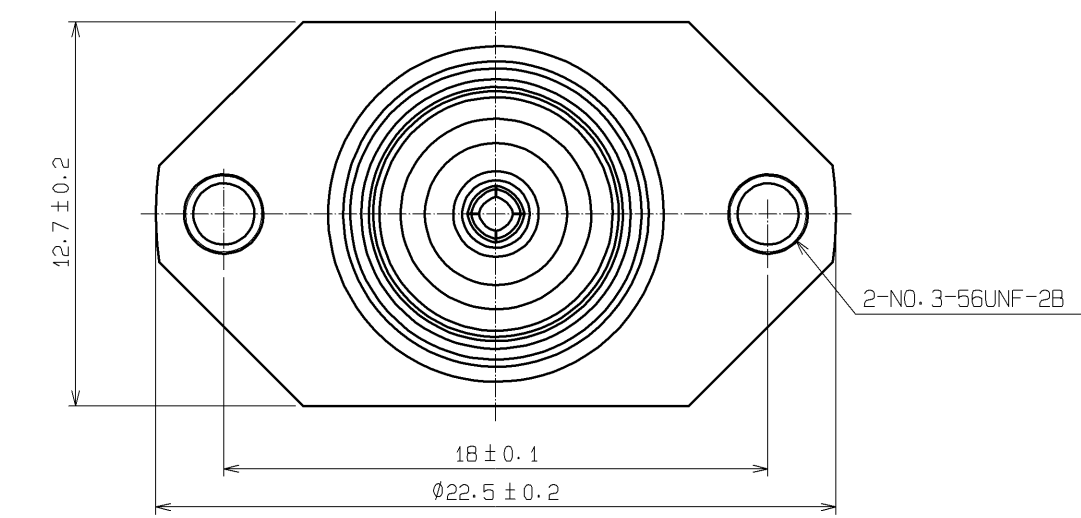

[PRECAUTIONS FOR HANDLING]

- ◆Connector insertion and extraction
a. Connector shall be extracted vertically by specialised extraction JIG.
Part No. : U.FL-LP-N-2 (CL Code: CL331-0494-5)
Never hold the cable when extracting the cable because it damages the connector.
b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.
- ◆Allowable loads on the cable after the connectors are mated.
The figures below show the maximum allowable loads(*1) on the cable. Do not apply loads exceeding these values to the cable.

Diagram showing allowable loads on the cable. The cable is labeled U.FL-LP-N-2 and U.FL-LP-066. The maximum load is 3.9N MAX. The cable length is 9.3MAX. The connector height is 2.5MAX.

4	PTFE		7	BRASS	NICKEL PLATING
3	BERYLLIUM COPPER	GOLD PLATING	6	PTFE	
2	PTFE		5	BRASS	NICKEL PLATING
1	BRASS	NICKEL PLATING			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		APPROVED : MH. YAMANE	08.12.01	DRAWING NO. EDC3-308069-40			
		CHECKED : NK. NINOMIYA	08.11.29	PART NO. TNCJ-U. FLJ-PAC(40)			
		DESIGNED : TM. YOSHIDA	08.11.28	CODE NO. CL311-0400-7-40			
		DRAWN : TM. YOSHIDA	08.11.28	1/1			