


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

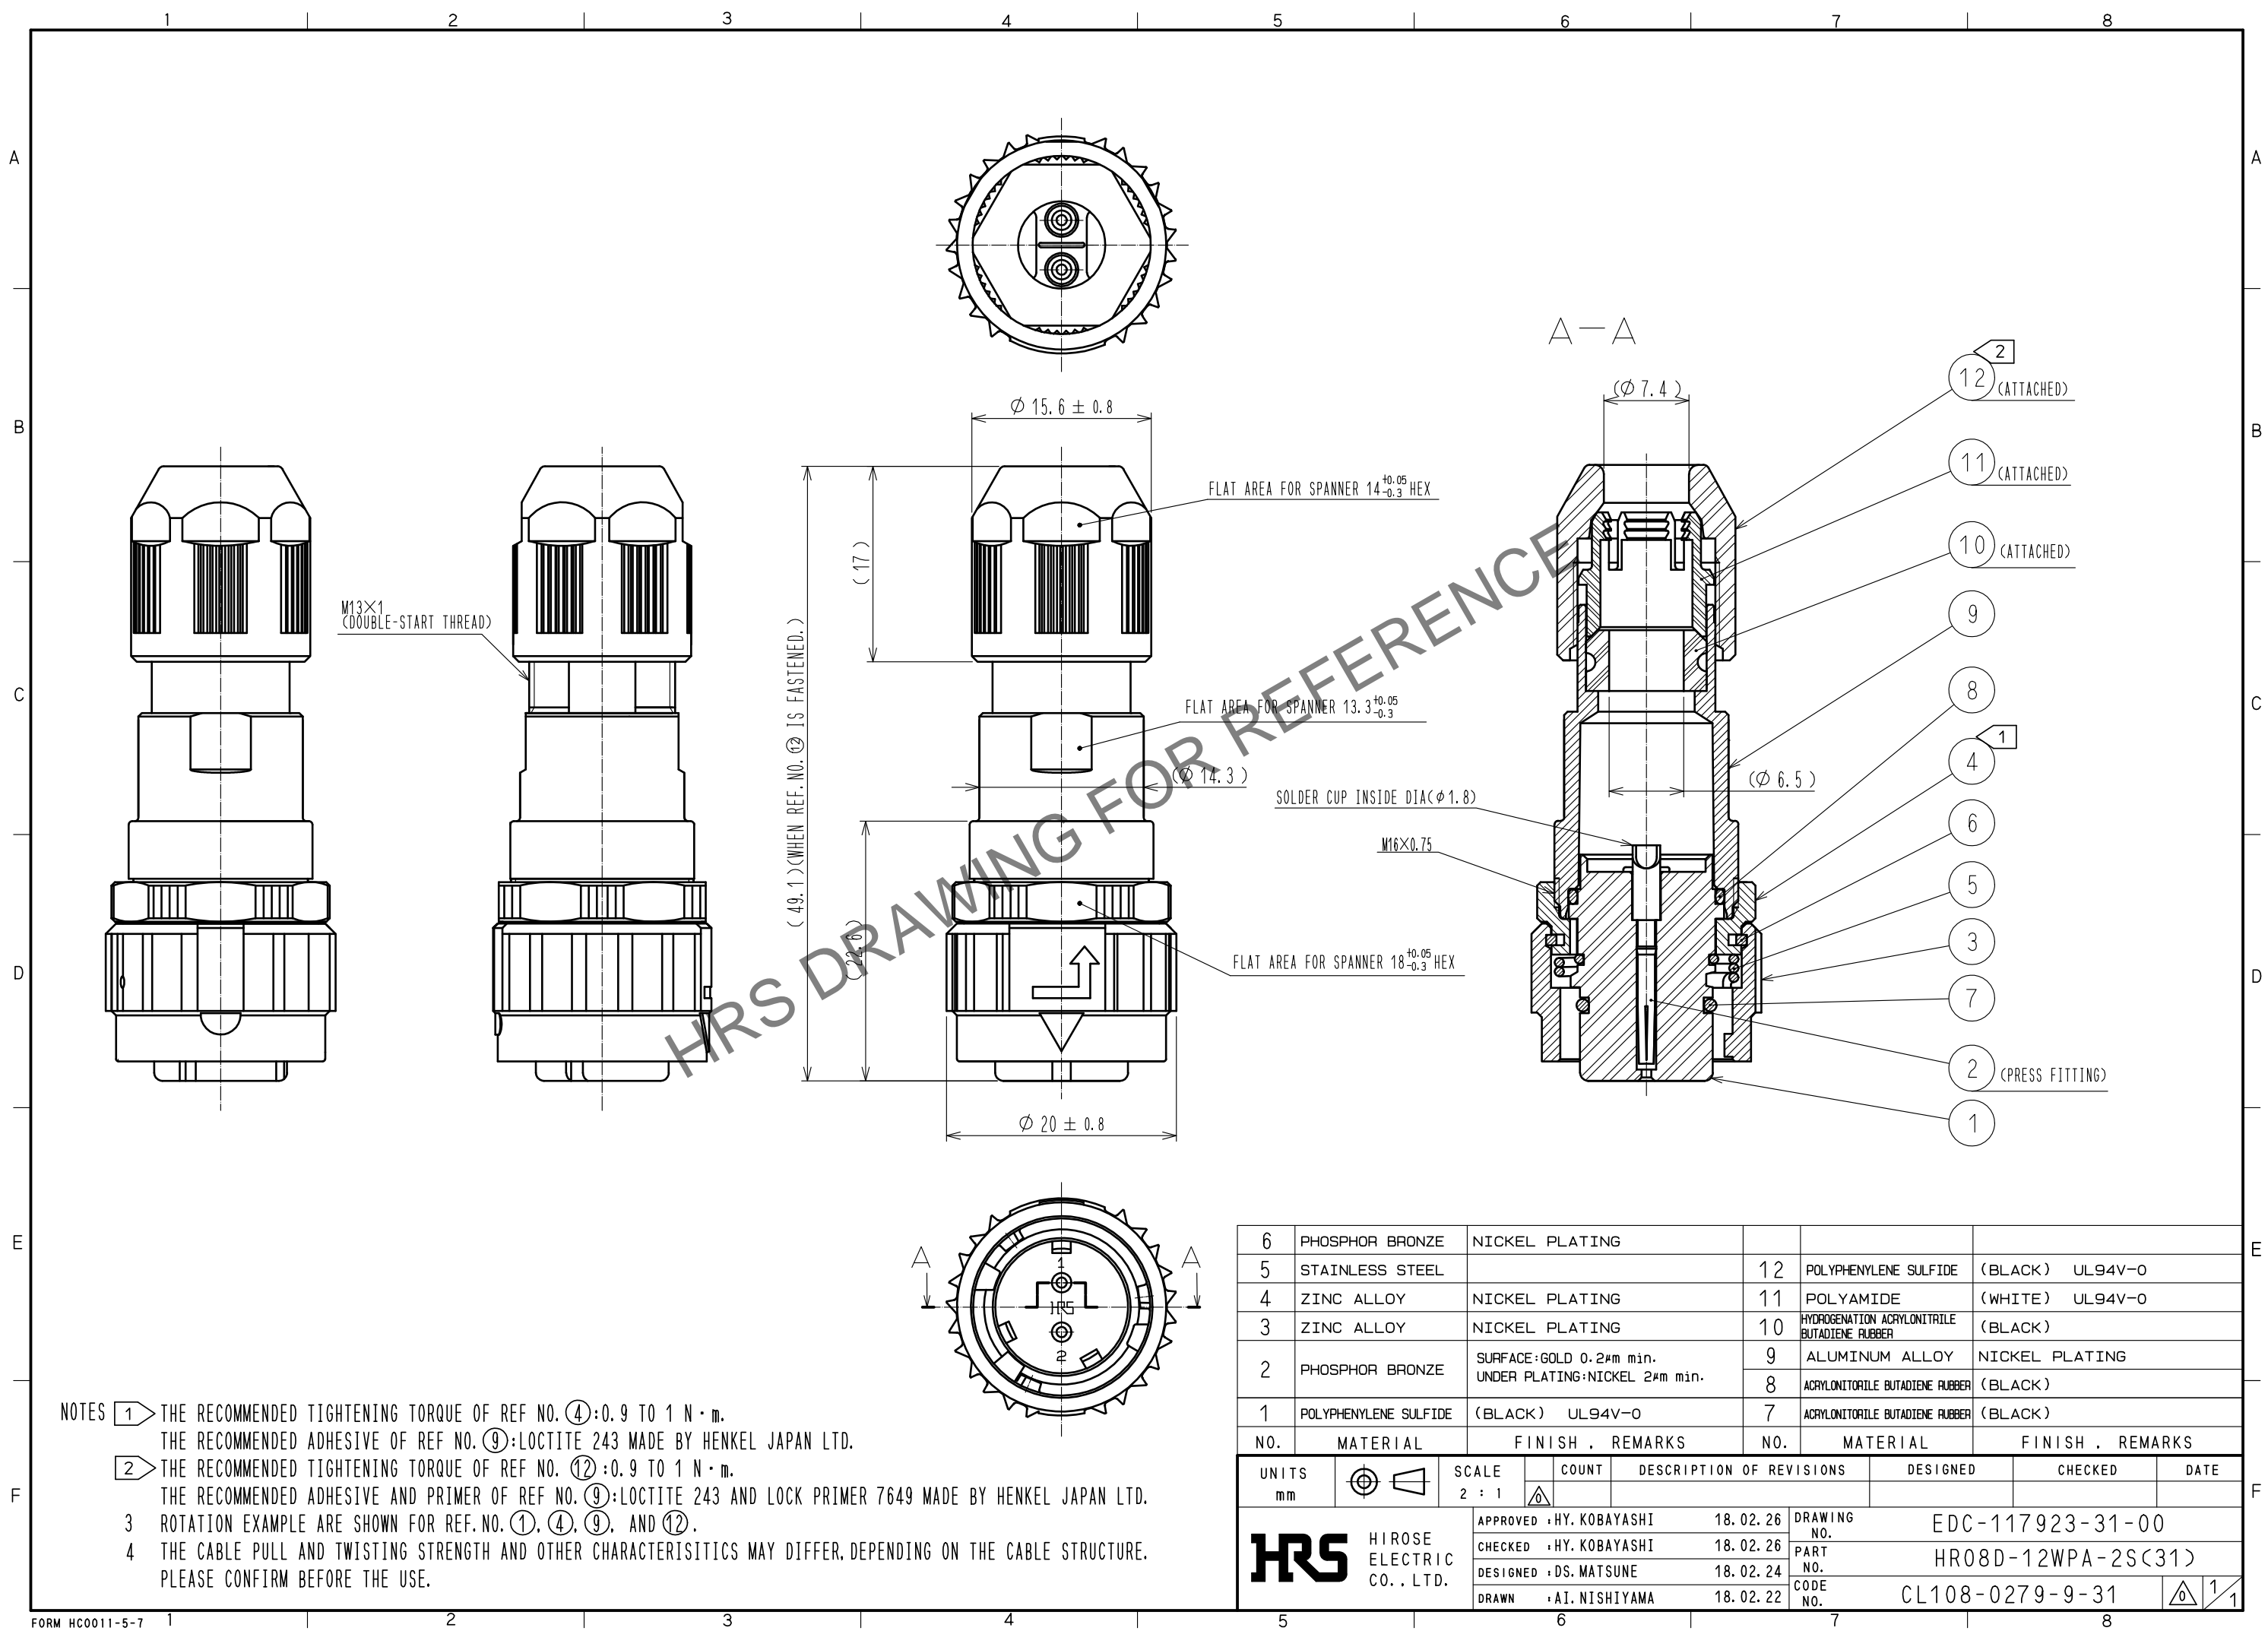

- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ④: 0.9 TO 1 N · m.  
THE RECOMMENDED ADHESIVE OF REF NO. ⑨: LOCTITE 243 MADE BY HENKEL JAPAN LTD.
  - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑫: 0.9 TO 1 N · m.  
THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ⑨: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
  - 3 ROTATION EXAMPLE ARE SHOWN FOR REF.NO. ①, ④, ⑨, AND ⑫.
  - 4 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISITICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

6	PHOSPHOR BRONZE	NICKEL PLATING			
5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE	(WHITE) UL94V-0
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	PHOSPHOR BRONZE	SURFACE: GOLD 0.2μm min. UNDER PLATING: NICKEL 2μm min.	9	ALUMINUM ALLOY	NICKEL PLATING
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
			7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-117923-31-00
		CHECKED : HY. KOBAYASHI	18.02.26	PART NO.	HR08D-12WPA-2S(31)
		DESIGNED : DS. MATSUNE	18.02.24	CODE NO.	CL108-0279-9-31
		DRAWN : AI. NISHIYAMA	18.02.22		