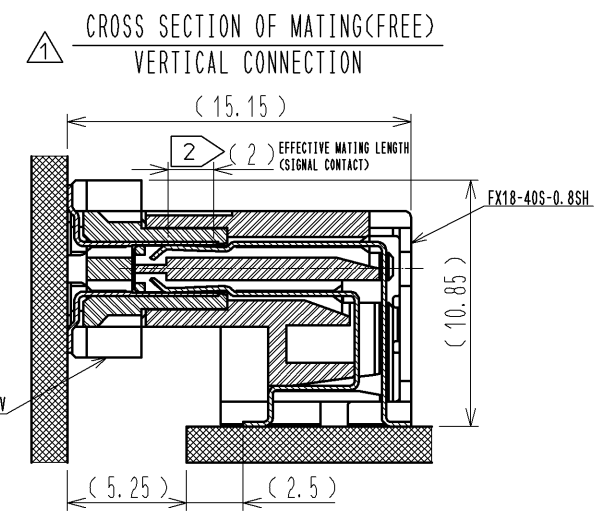
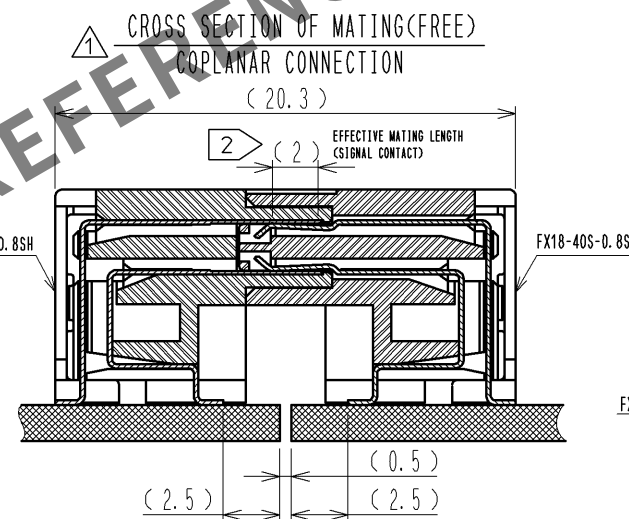
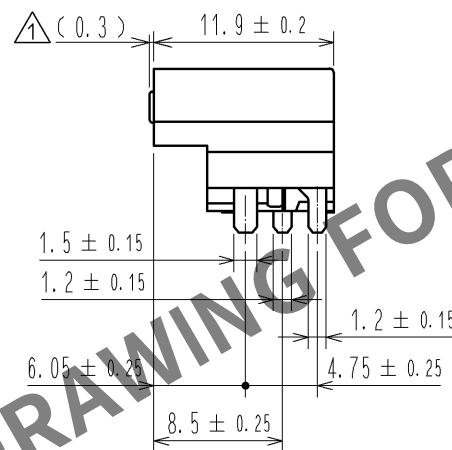
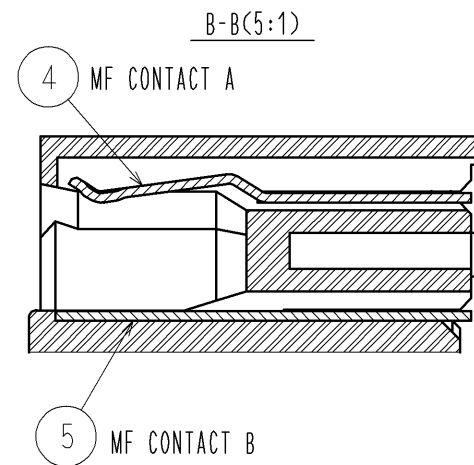
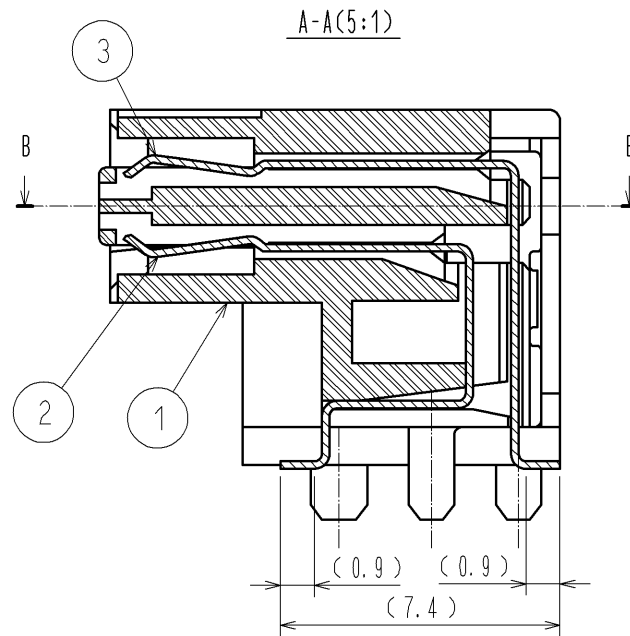
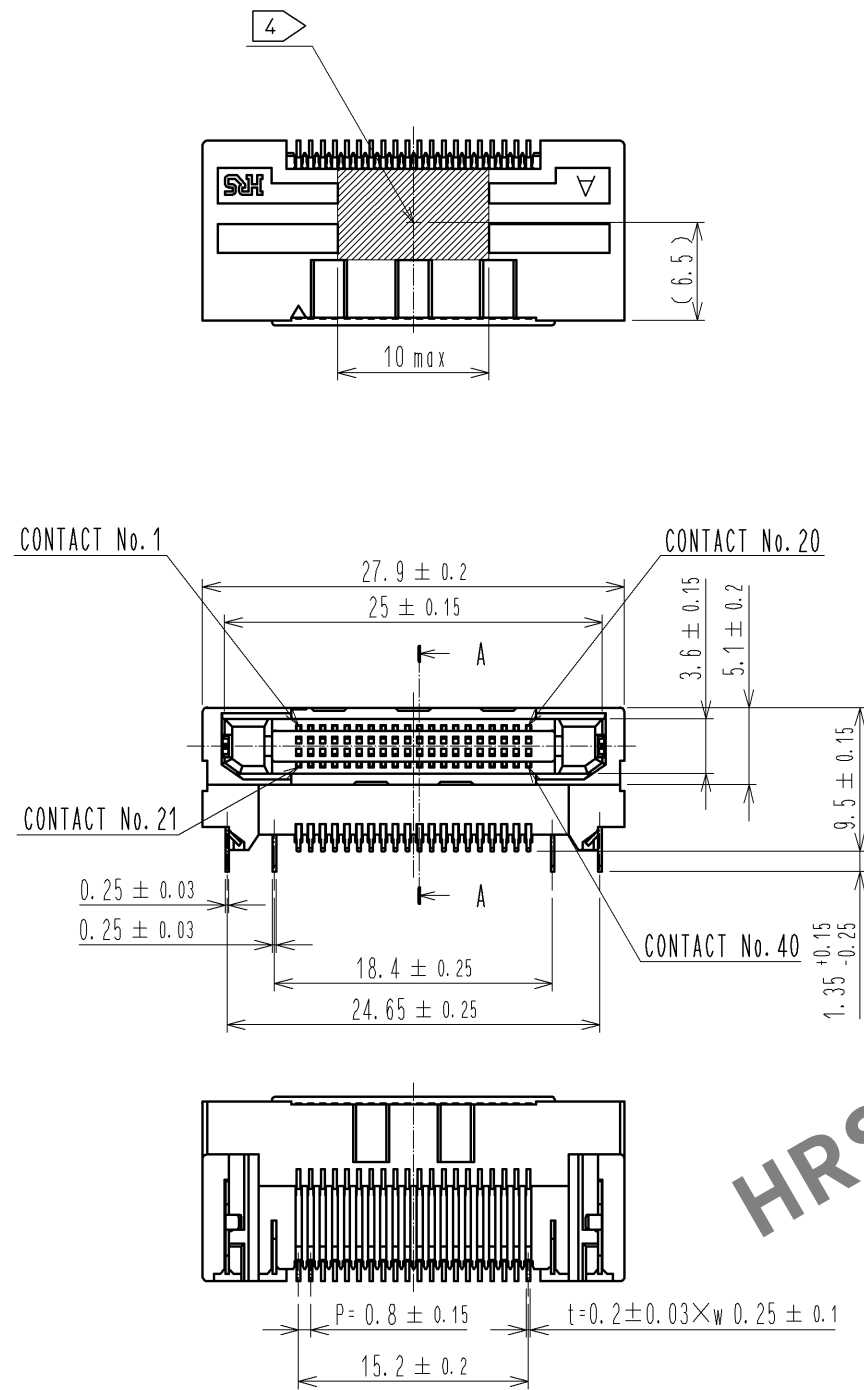


NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.

2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.

3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)

4 IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.

5 THIS IS PACKAGED IN TRAY. (70psc/TRAY)

6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL.

7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm	6	POLYSTYRENE	
		LEAD AREA:GOLD 0.03μm	5	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm
		UNDER PLATING:NICKEL 1.3μm			LEAD AREA:TIN-PLATING 1μm
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm	4	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm
		LEAD AREA:GOLD 0.03μm			LEAD AREA:TIN-PLATING 1μm
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3μm
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 7	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO
		APPROVED : HS. OKAWA	09.10.09	DRAWING NO.	EDC3-159081-00
		CHECED : KI. HIROKAWA	09.10.09	PART NO.	FX18-40S-0.8SH
		DESIGNED : TH. SANO	09.10.09	CODE NO.	CL579-0009-4-00
		DRAWN : TH. SANO	09.10.09		

