


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

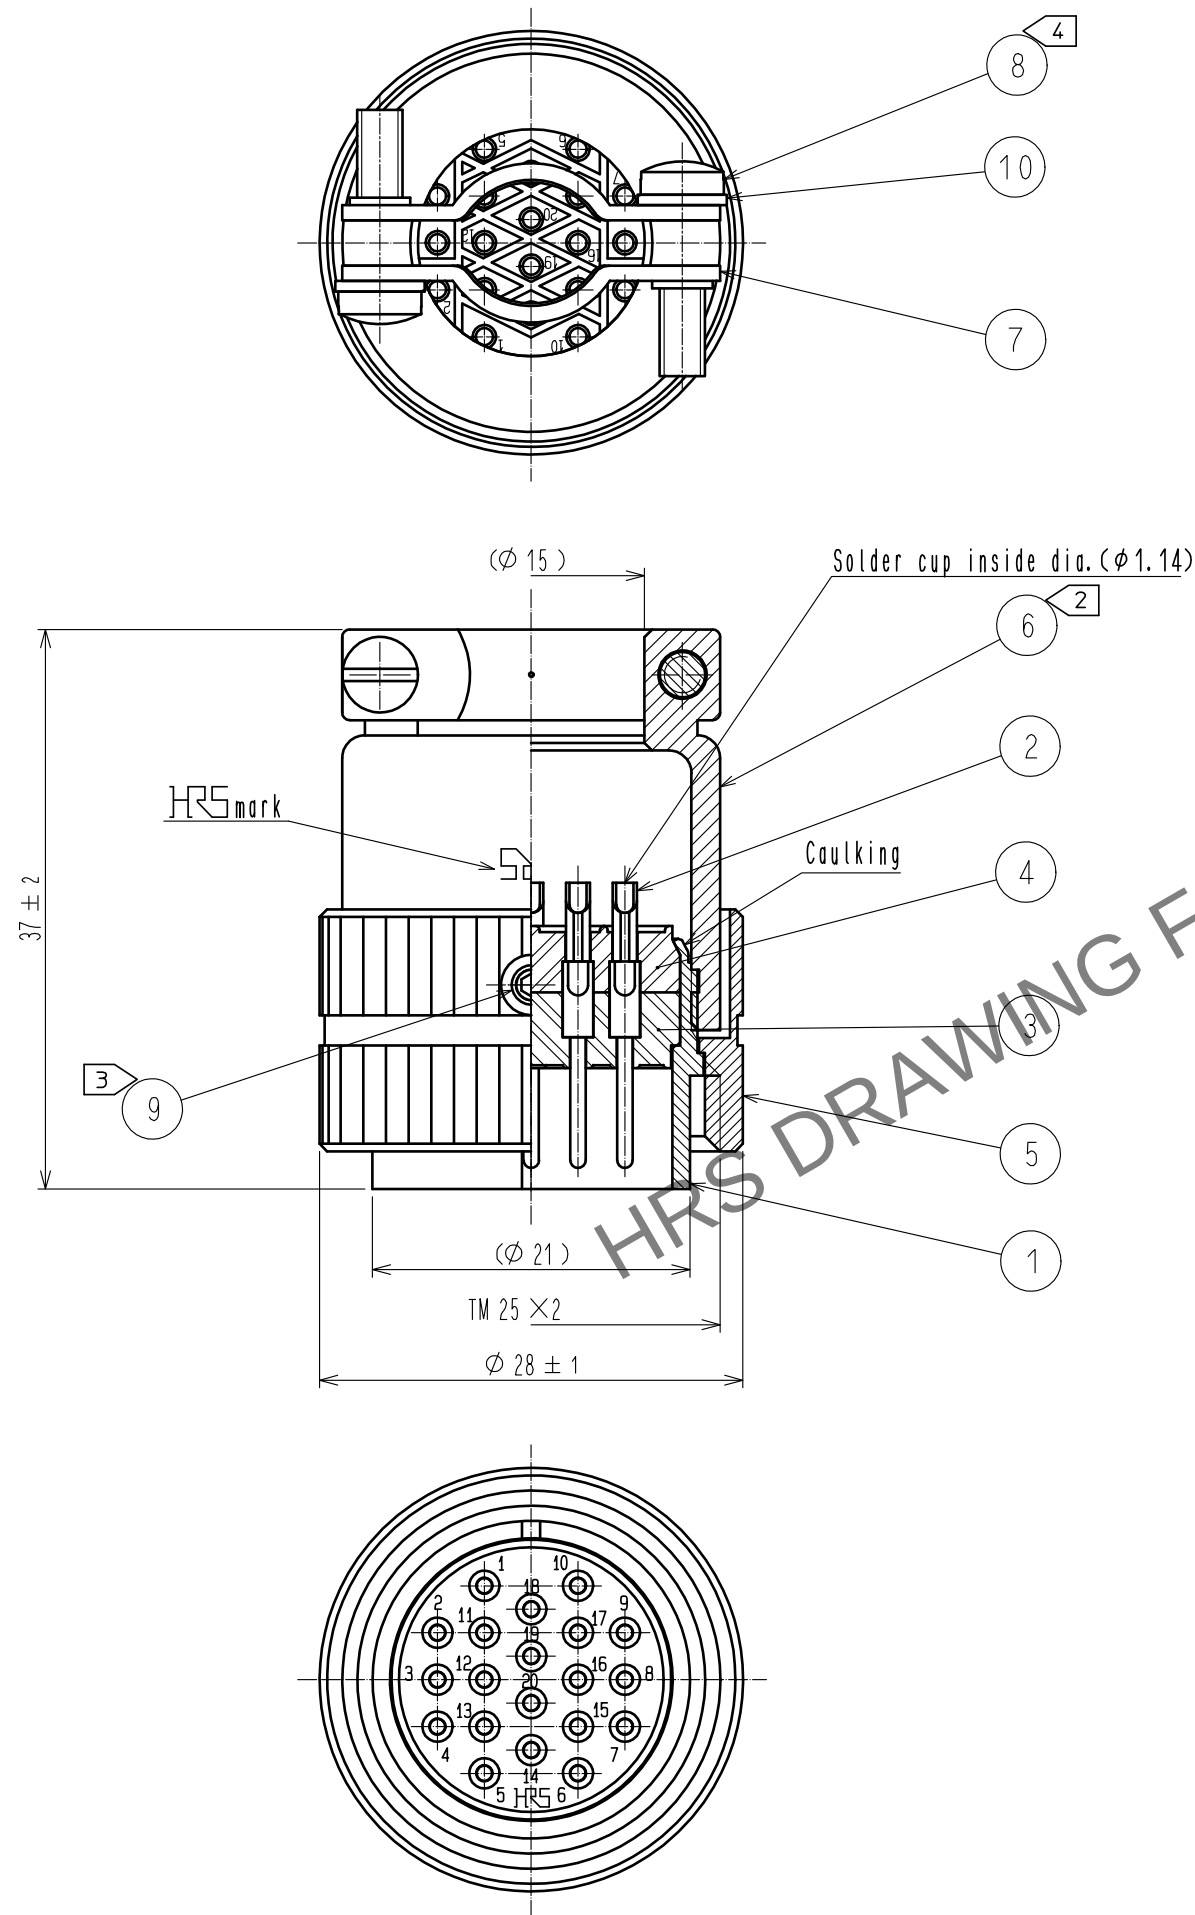

- Notes 1 Rotation example of Ref. No. ① and ⑥ are shown.
2 The tightening torque of Ref. No. ⑥: 2 to 3 N · m.
3 The tightening torque of Ref. No. ⑨: 0.2 to 0.3 N · m.
Across flats hexagon head of Ref. No. ⑨: 1.27
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑨
in order to prevent loosening.
4 The tightening torque of Ref. No. ⑧: 0.6 to 0.7 N · m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑧
in order to prevent loosening.
5 The cable pull and twisting strength and other characteristics may differ,
depending on the cable structure, please confirm before the use.

5	Brass	Nickel plating	10	Phosphor bronze	Nickel plating	Spring lock washers No. 2 3mm
4	Polyphenylene sulfide	(Black)	9	Steel	Nickel plating	Hexagon socket set screws M2.6×0.45×2
3	Polyphenylene sulfide	(Black)	8	Brass	Nickel plating	Slotted head screw M3×0.5×12
2	Brass	Silver plating 4μm min.	7	Brass	Nickel plating	
1	Brass	Nickel plating	6	Brass	Nickel plating	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : TP. KOMATSU 20230616			DRAWING NO. EDC-003428-81-00			
	CHECKED : HY. KOBAYASHI 20230616			PART NO. RM21TP-20P(81)			
	DESIGNED : HT. ZENBA 20230616			CODE NO. CL0109-0324-8-81			
	DRAWN : KR. SUZUKI 20230614						