
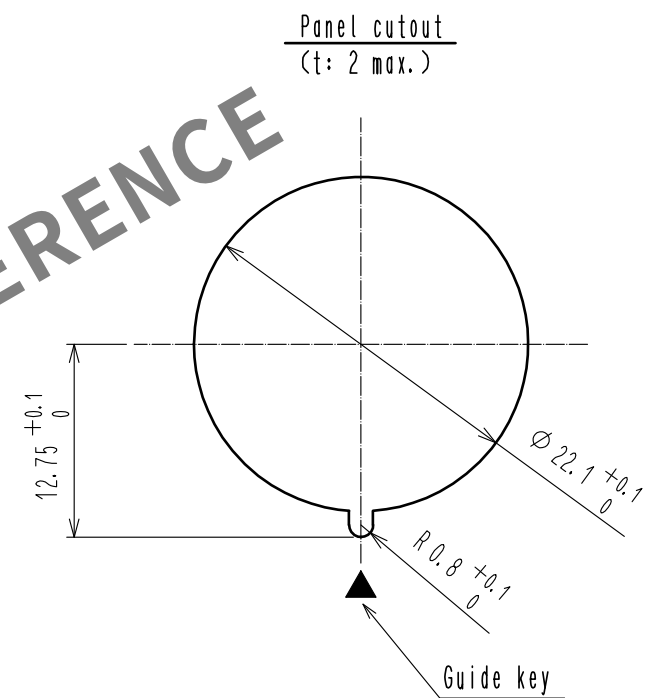


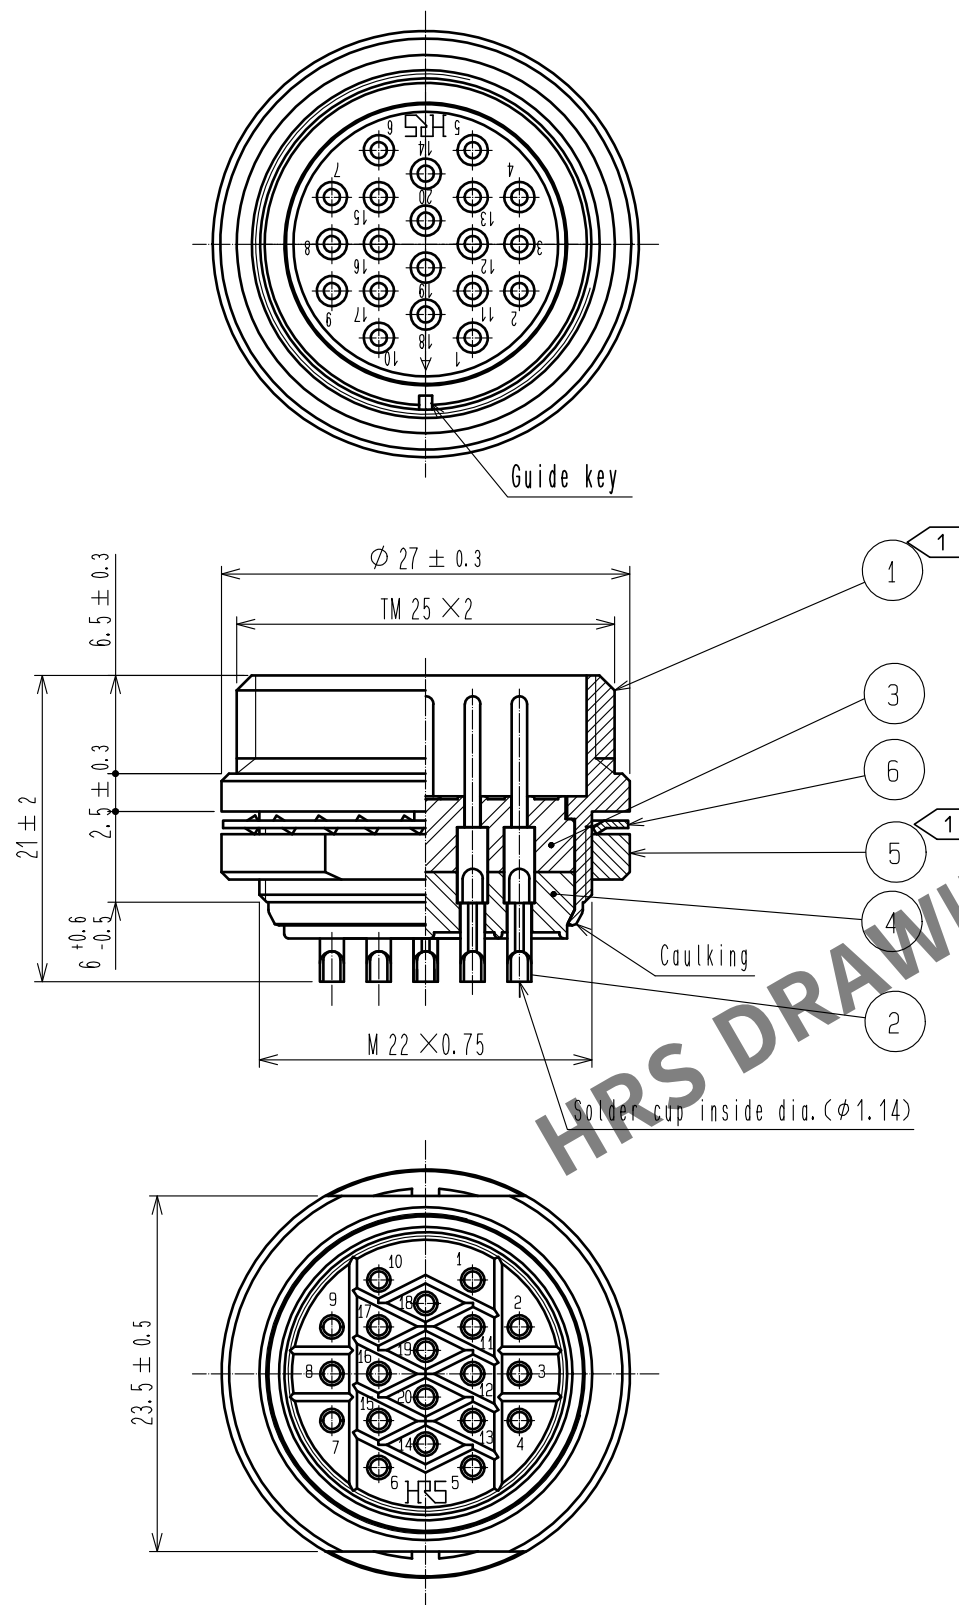

Note 1 The tightening torque of Ref. No. ⑤: 3 to 4 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M22×0.75) of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Brass	Silver plating 4 μm min.	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
	HIROSE ELECTRIC CO., LTD.	APPROVED : TP. KOMATSU	20230616	DRAWING NO.	EDC-003429-81-00
		CHECKED : HY. KOBAYASHI	20230616	PART NO.	RM21TR-20P(81)
		DESIGNED : HT. ZENBA	20230616	CODE NO.	CL0109-0326-3-81
		DRAWN : KR. SUZUKI	20230614		