
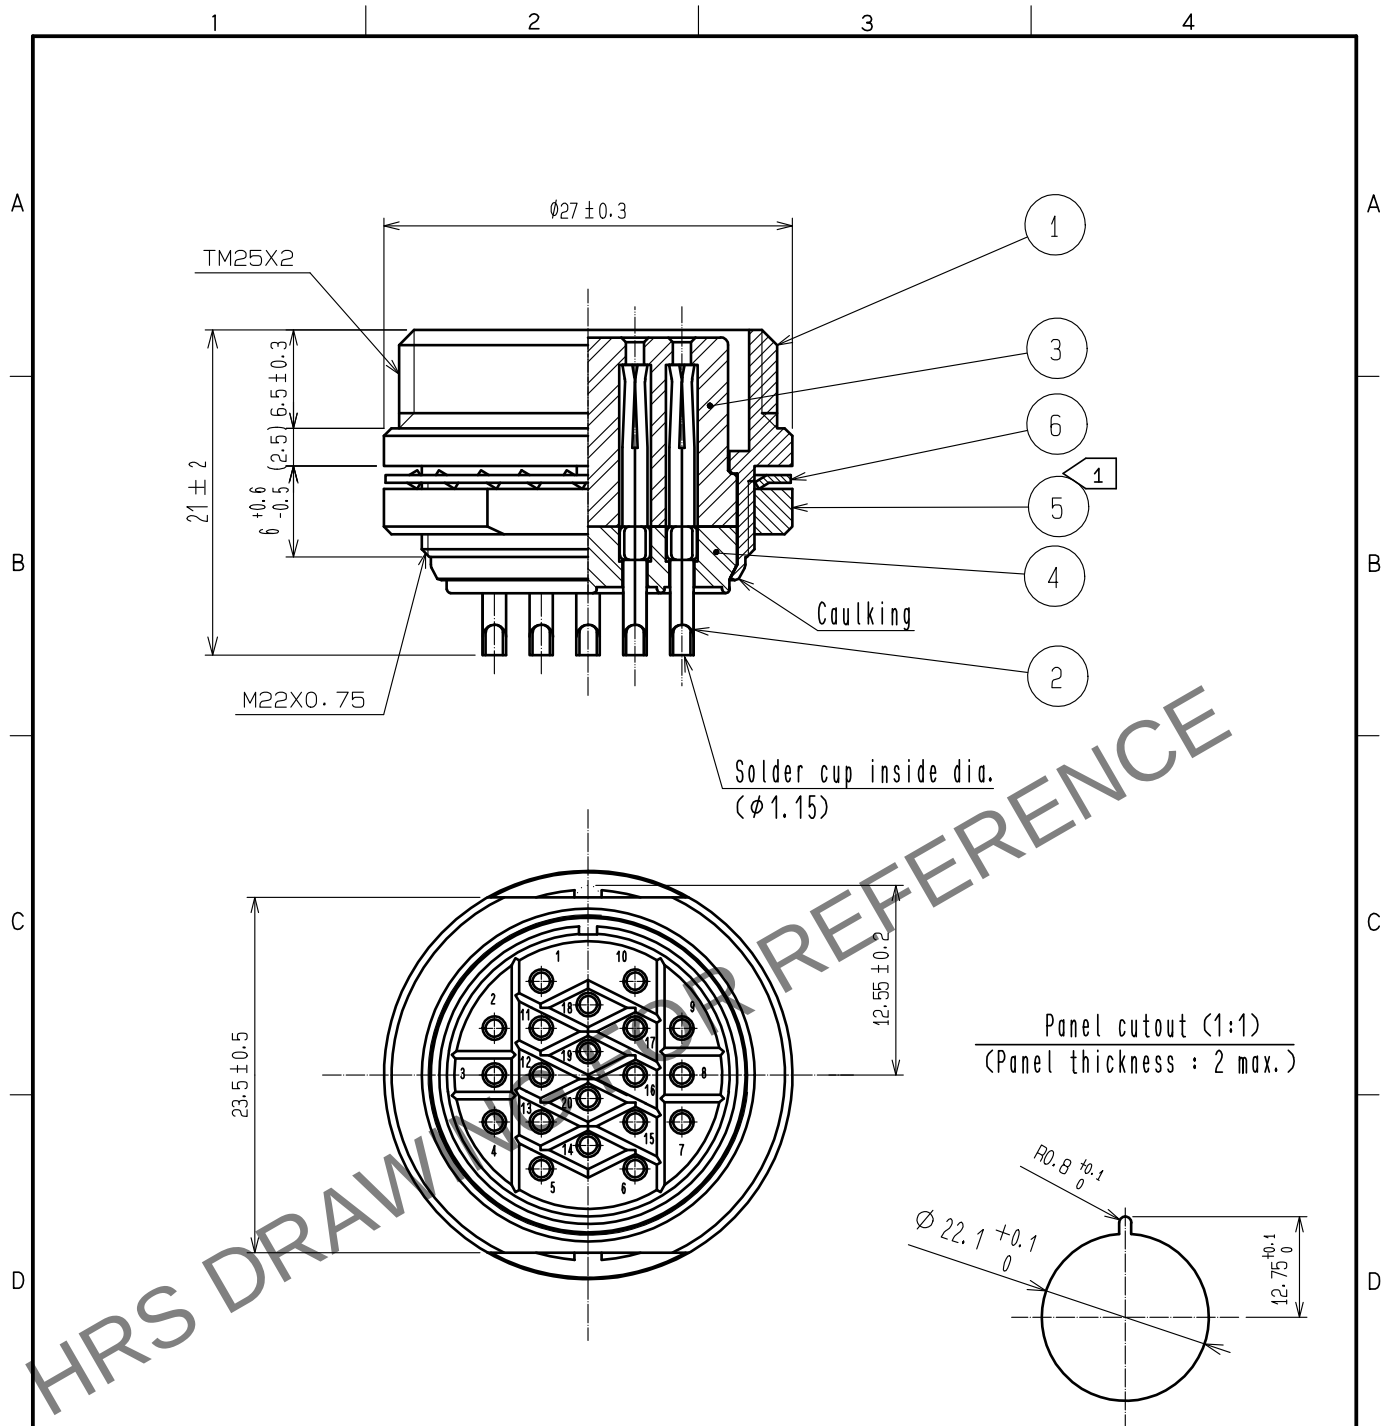


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Note 1 The recommended tightening torque of ref. No. 5 : 4 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. 5 from loosening.

3	PPS	(Black) UL94V-0	6	Phosphor bronze	Nickel plating					
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating					
1	Brass	Nickel plating	4	PPS	(Black) UL94V-0					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED		HY. KOBAYASHI	15.12.17	DRAWING NO. EDC-003430-81-00		
				CHECKED		HY. KOBAYASHI	15.12.17	PART NO. RM21TR-20S(81)		
				DESIGNED		KN. IKEHARA	15.12.17	CODE NO. CL109-0328-9-81		
				DRAWN		KN. IKEHARA	15.12.17			