


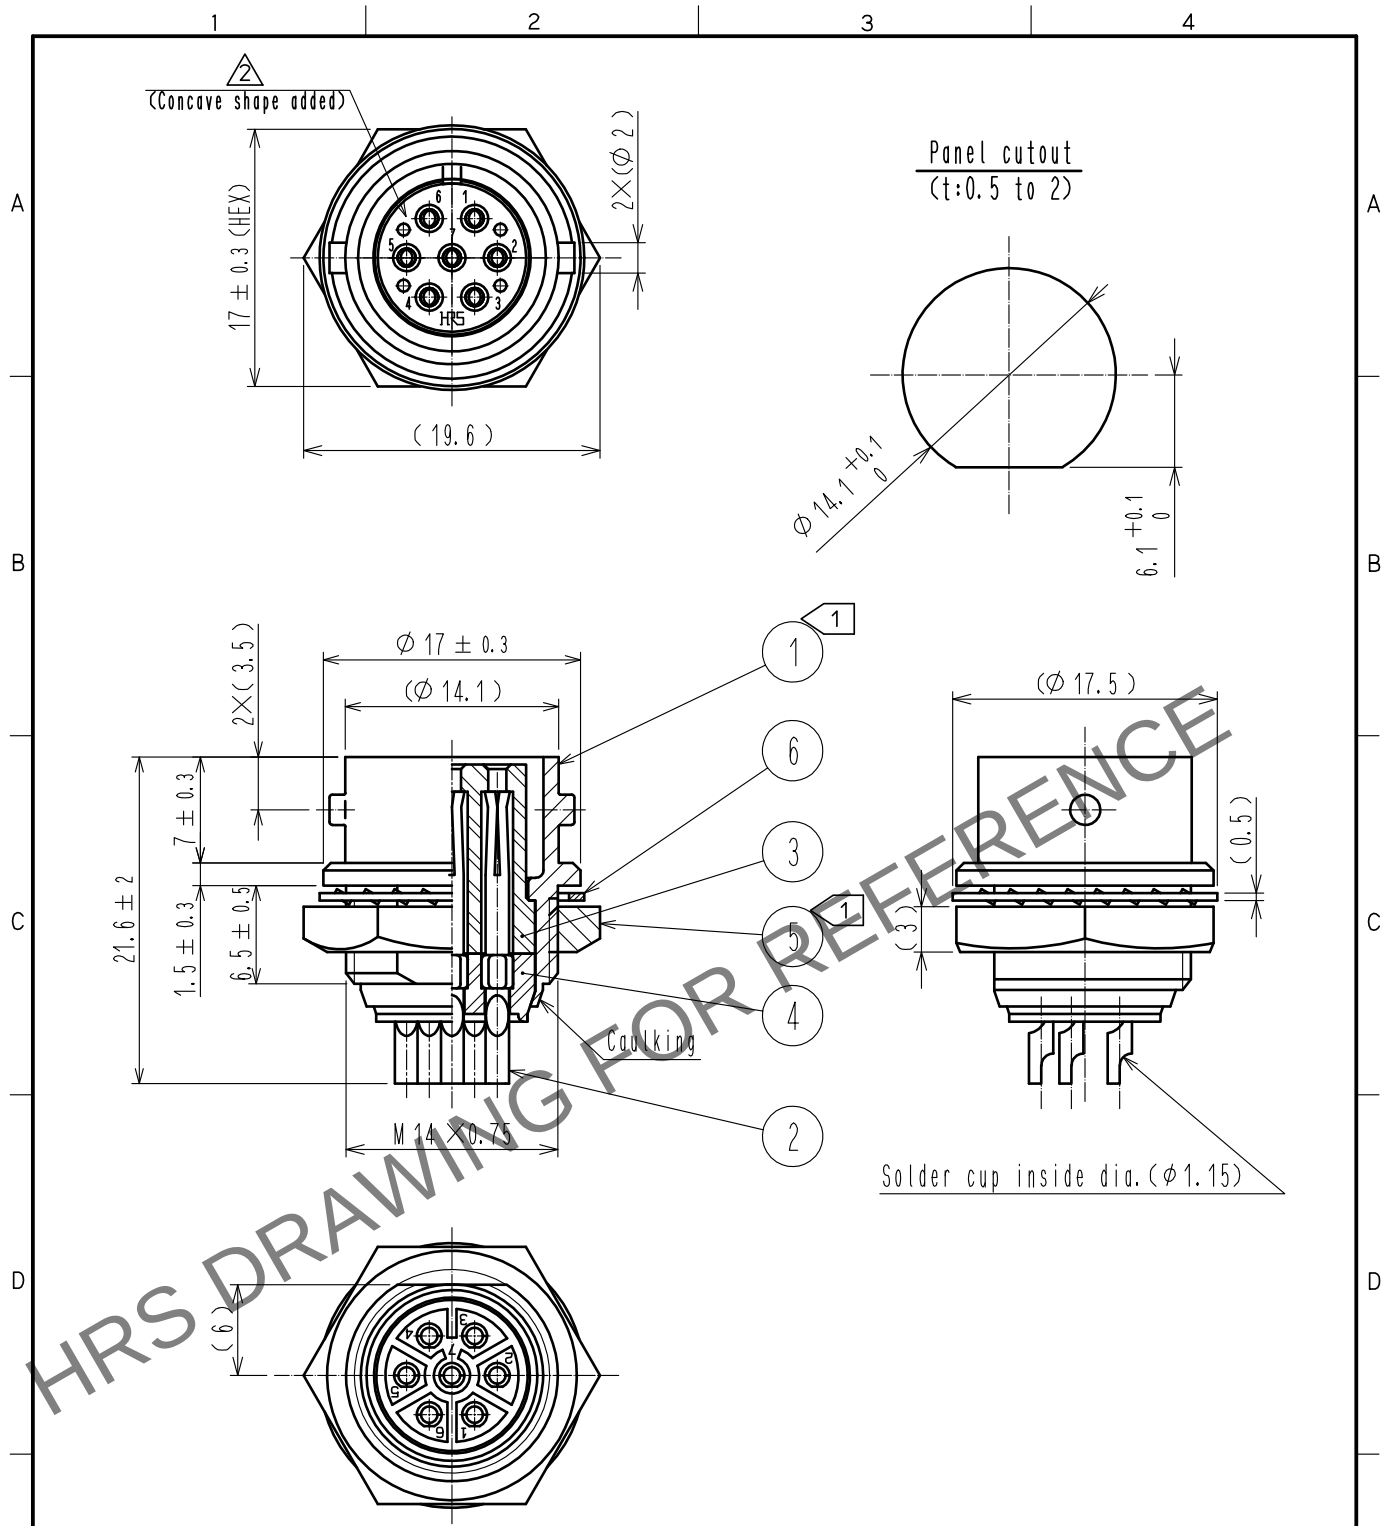

Note 1 The tightening torque of Ref. No. ⑤: 2 to 2.5 N · m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion(M14×0.75) of
Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)	6	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 5μm min.	5	Brass	Nickel plating
1	Zinc alloy	Matte finish nickel plated	4	Polyphenylene sulfide	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00016538	DESIGNED TY. SUZUKI
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	TP. KOMATSU	20230612	DRAWING NO. EDC-006792-81-00
		CHECKED	HY. KOBAYASHI	20230612	PART NO. RM12BRD-7S(81)
		DESIGNED	HT. ZENBA	20230609	CODE NO. CL0109-0619-1-81
		DRAWN	KR. SUZUKI	20230607	
					1/1