
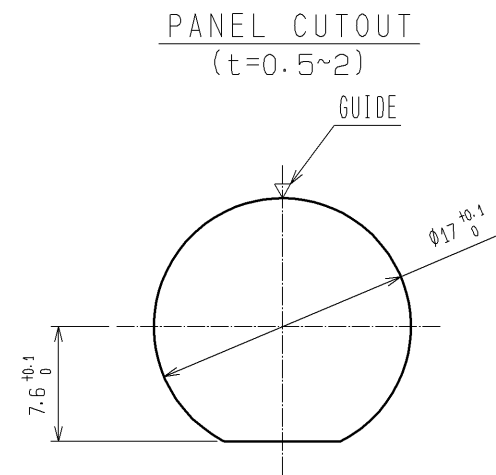
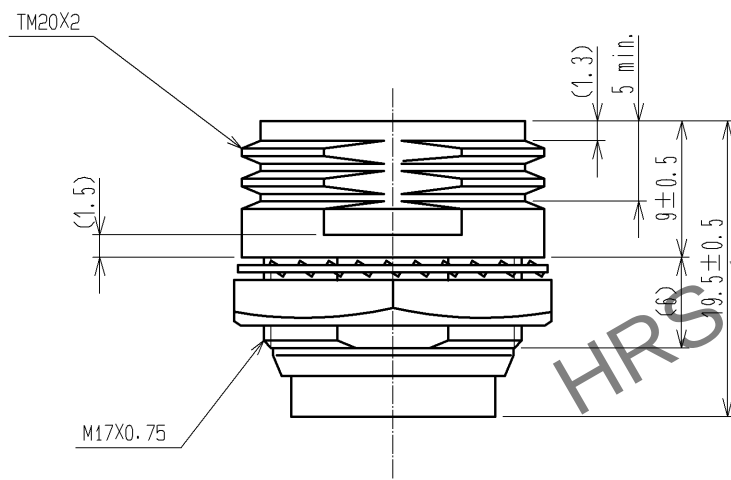
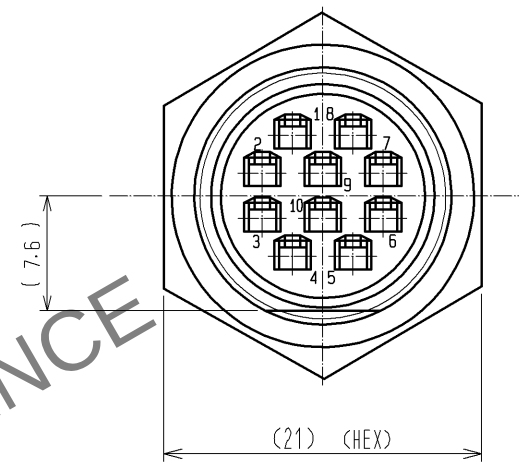
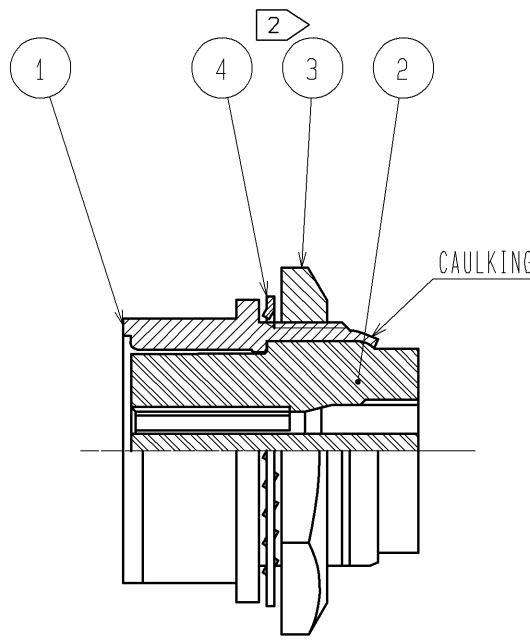


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

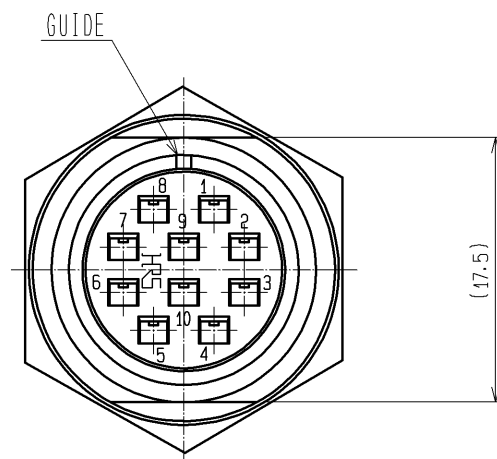

- NOTES 1 APPLICABLE CONTACT : RM-SC-212 OR 112 (AWG#24~#20) AND RM-SC-222 OR 122(AWD #28~#24)
APPLICABLE CONTACT EXTRACTION TOOL : RM-TP
2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ③ TO BE 3~4N·m. LOCTITE 242,
HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ③ FROM LOOSENING.

2	POLYCARBONATE	BLACK	4	PHOSPHOR BRONZE	NICKEL PLATING					
1	ZINC ALLOY	MATTE FINISH CHROME PLATED	3	BRASS	NICKEL PLATING					
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH		09. 04. 15	DRAWING NO.		EDC3-007617-71			
		CHECKED : SI. MATSUZAKI		09. 04. 15	PART NO.		RM15TRD-10SC(71)			
		DESIGNED : HK. NAMAI		09. 04. 13	CODE NO.		CL109-0676-5-71			
		DRAWN : HK. NAMAI		09. 04. 13						
										1/1