
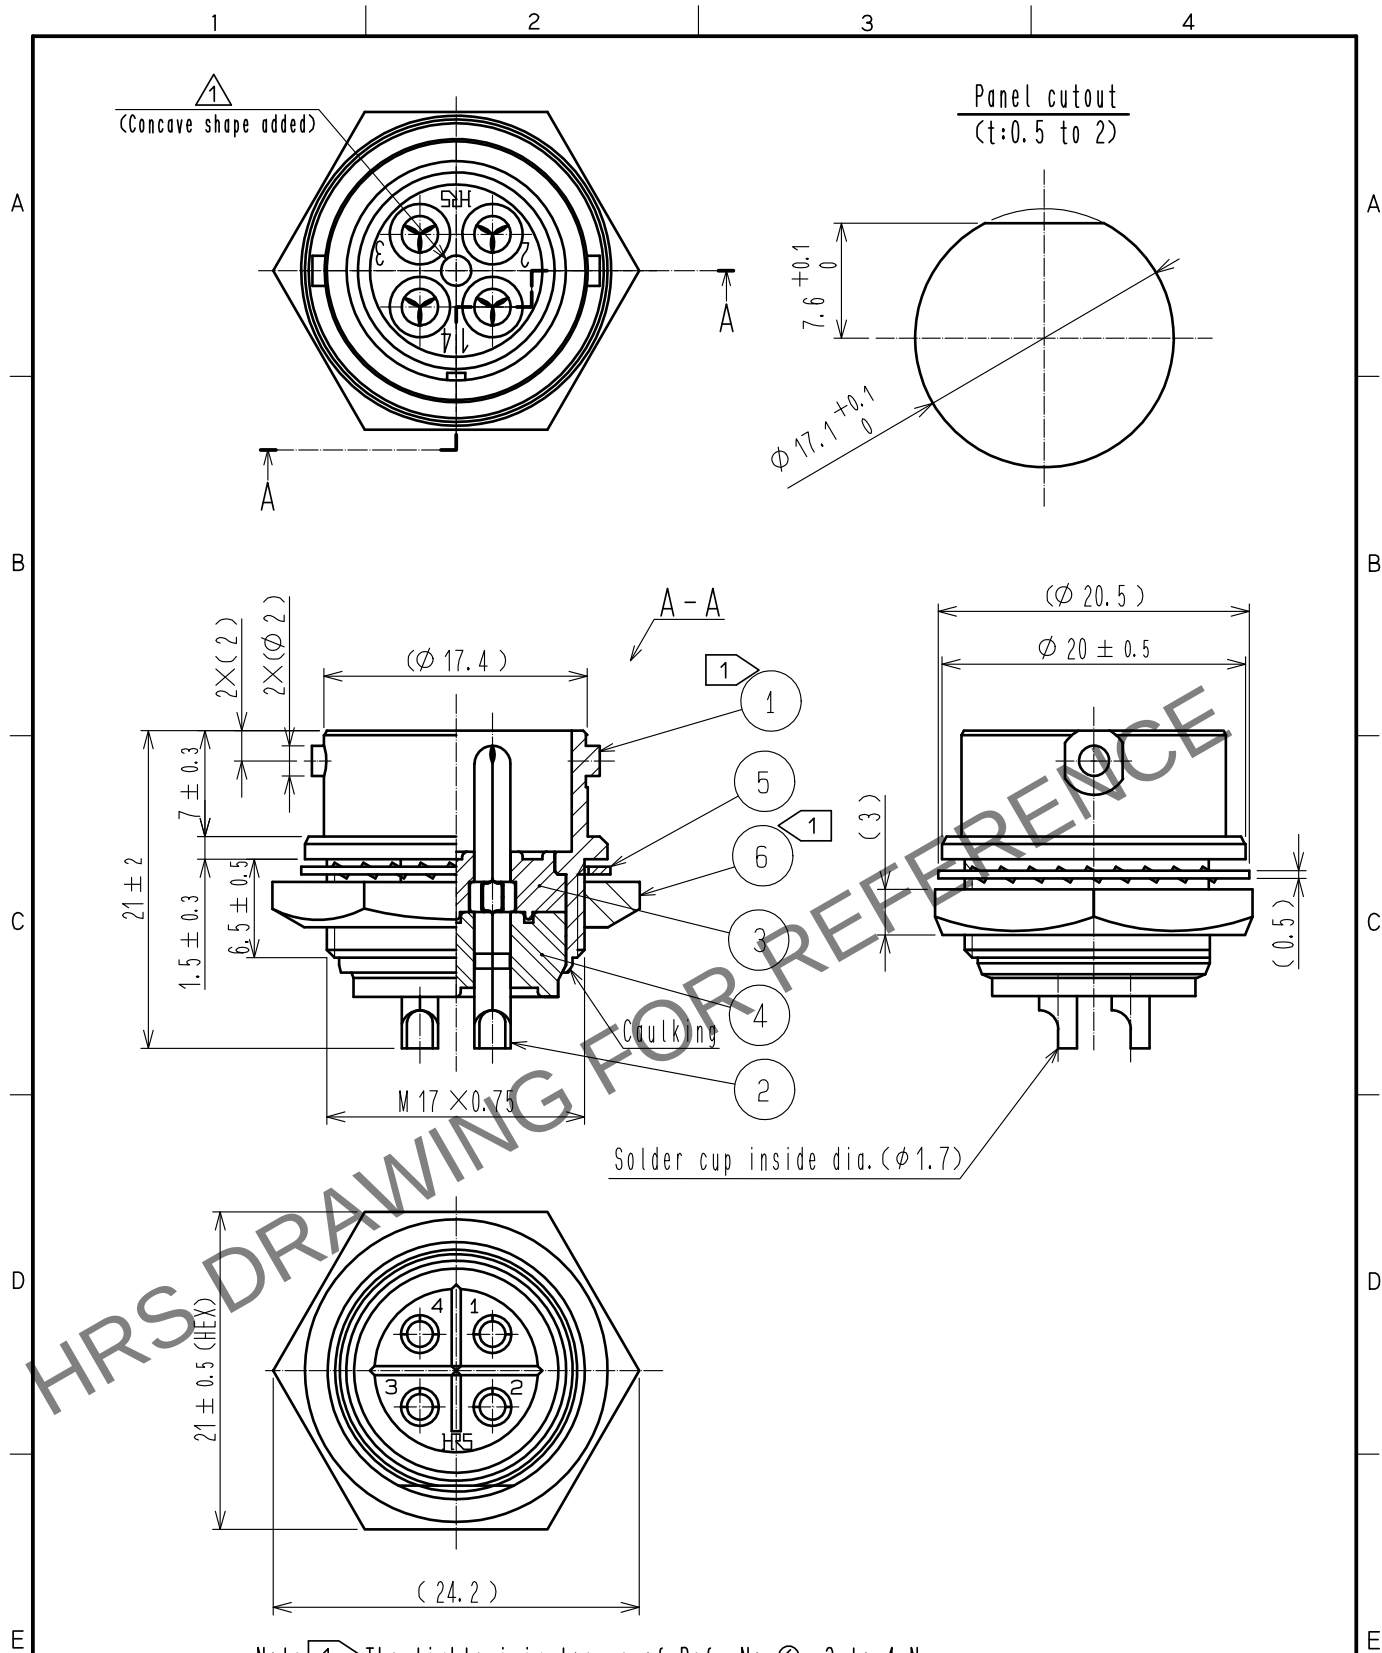




Note ① The tightening torque of Ref. No. ⑥ : 3 to 4 N・m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75)
of Ref. No. ① in order to prevent loosening.

3	Polyphenylene sulfide	(Black)		6	Brass	Nickel plating		
2	Brass	Silver plating 2μm min.		5	Phosphor bronze	Nickel plating		
1	Brass	Nickel plating		4	Polyphenylene sulfide	(Black)		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00016536	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20231208
 HIROSE ELECTRIC CO., LTD.		APPROVED : TP. KOMATSU		20230613	DRAWING NO. EDC-040351-81-00			
		CHECKED : HY. KOBAYASHI		20230613	PART NO. RM15QRD-4PA(81)			
		DESIGNED : HT. ZENBA		20230613	CODE NO. CL0109-0881-4-81			
		DRAWN : KR. SUZUKI		20230613	 1/1			