


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

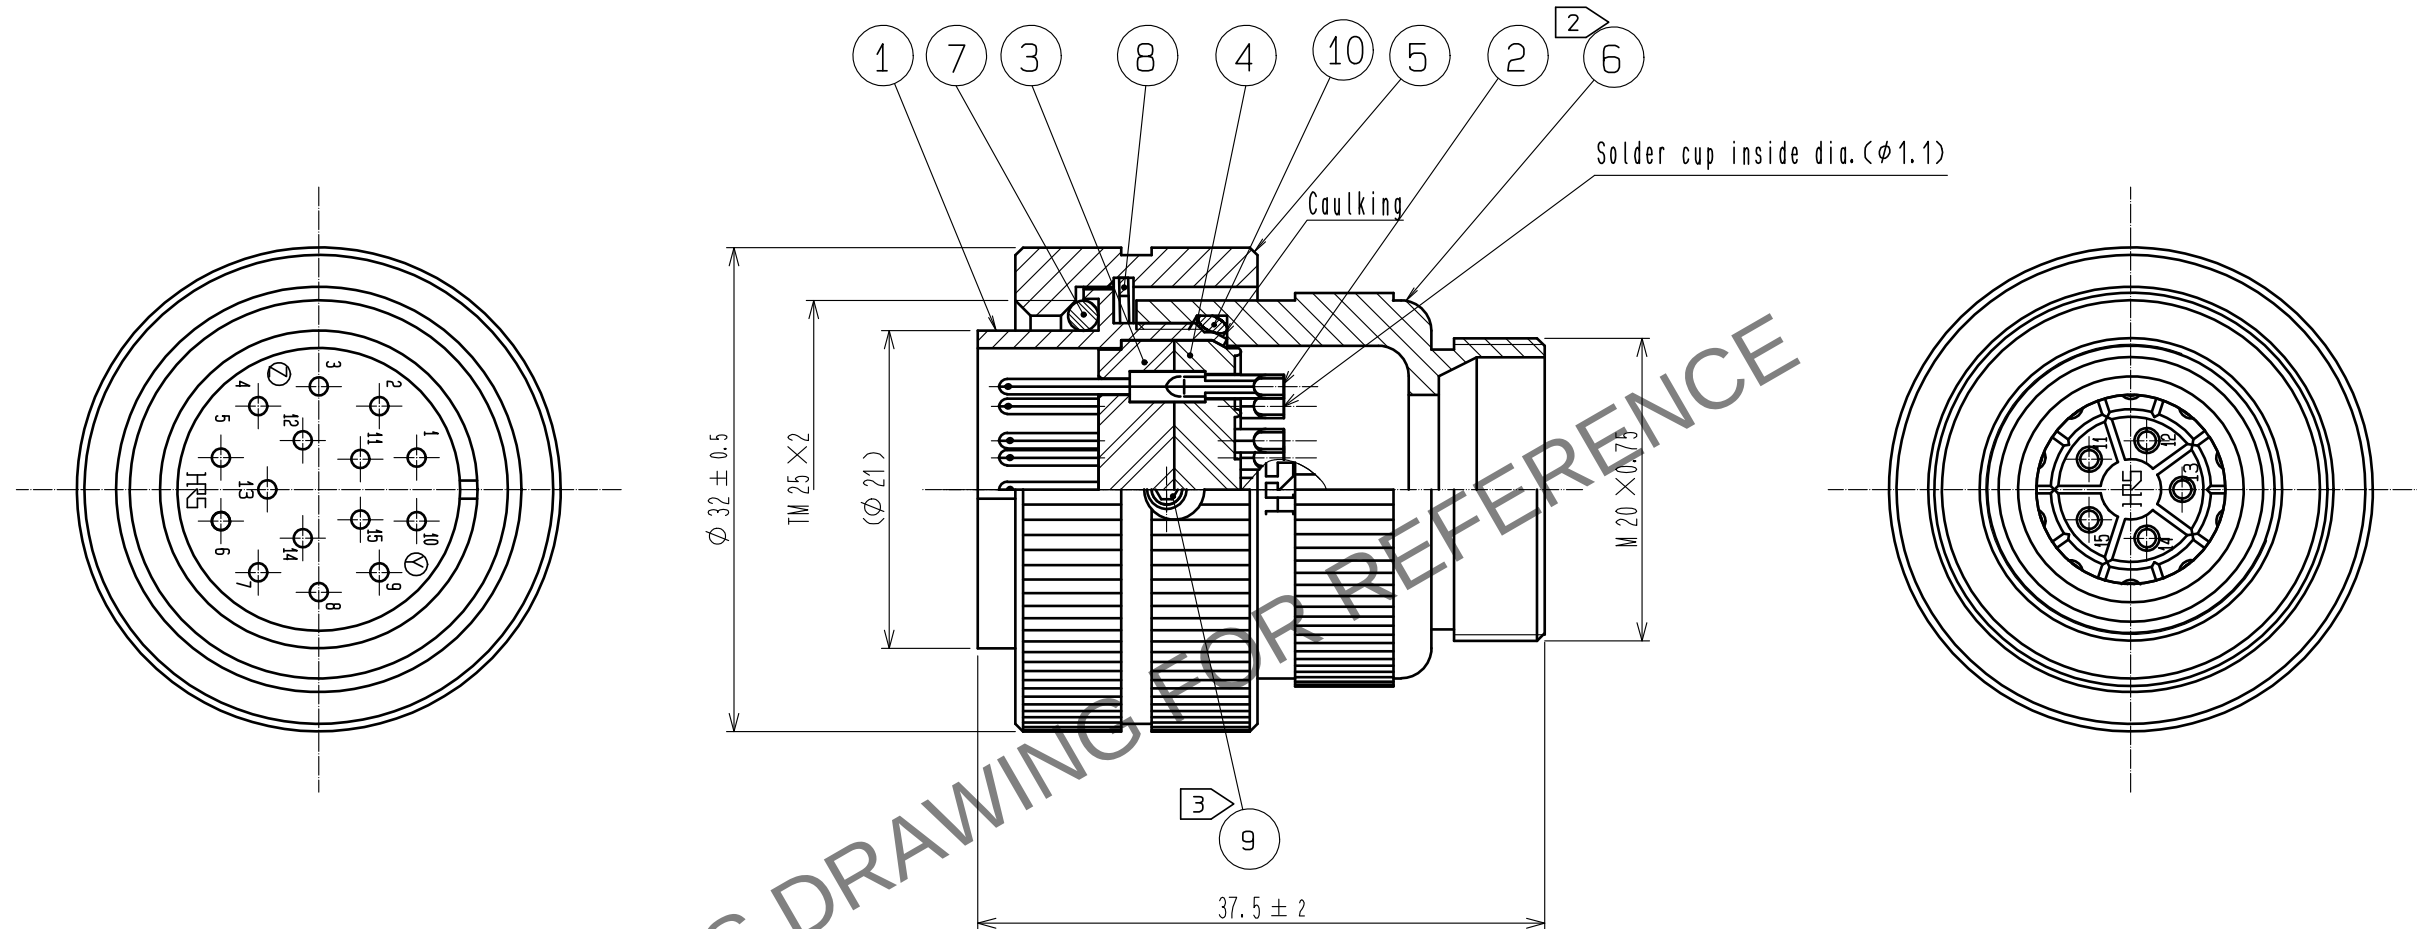

- Notes 1 Rotation example of Ref. No. ① and ⑥ are shown.
2 The tightening torque of Ref. No. ⑥: 2 to 3 N·m.
3 The tightening torque of Ref. No. ⑨: 0.2 to 0.3 N·m.
Across flats hexagon head of Ref. No. ⑨: 1.27
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑨
in order to prevent loosening.
4 This product to be used with cable clamp, RM21WTP-CP(※)(71).
※ designate diameter of applicable cable.
5 The cable pull and twisting strength and other characteristics may differ,
depending on the cable structure, please confirm before the use.

5	Brass	Nickel plating	10	Chloroprene rubber	(Black)
4	Polyphenylene sulfide	(Black)	9	Steel	Nickel plating
3	Polyphenylene sulfide	(Black)	8	Phosphor bronze	Nickel plating
2	Copper alloy	Silver plating 2 μm min.	7	Chloroprene rubber	(Black)
1	Brass	Nickel plating	6	Brass	Nickel plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
HRS		APPROVED : TP. KOMATSU	20230616	DRAWING NO.	EDC-110104-81-00
HIROSE ELECTRIC CO., LTD.		CHECKED : HY. KOBAYASHI	20230616	PART NO.	RM21WTP-15P(81)
		DESIGNED : HT. ZENBA	20230616	CODE NO.	CL0109-1403-8-81
		DRAWN : KR. SUZUKI	20230614		