


May.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
△					△					

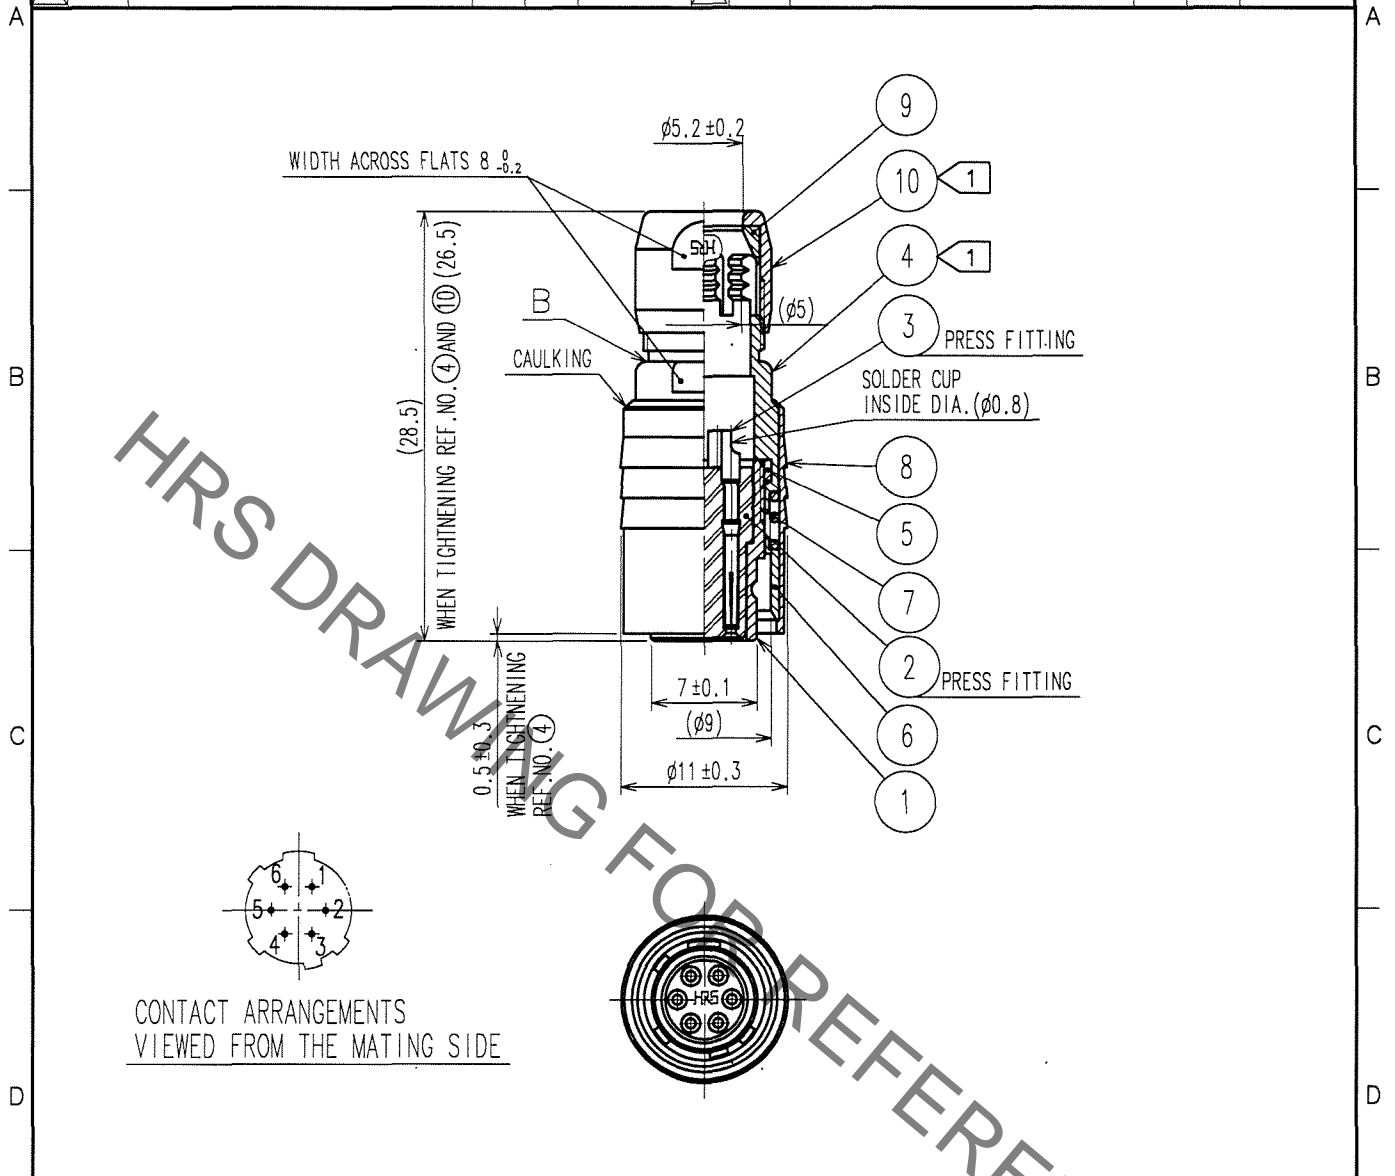

HRS DRAWING FOR REFERENCE

CONTACT ARRANGEMENTS
VIEWED FROM THE MATING SIDE

- NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. 4 AND 10 : 1.5 N · m.
REF. NO. 10 SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. 1, 4 AND 10 ARE SHOWN.

5	POLYAMIDE		10	BRASS	MATTE FINISH NICKEL PLATED
4	BRASS	MATTE FINISH NICKEL PLATED	9	POLYAMIDE	
3	BERYLLIUM COPPER	GOLD PLATING 0.2μ m min. NICKEL UNDER PLATING 2μ m min.	8	BRASS	MATTE FINISH NICKEL PLATED
2	POLYAMIDE	(BLUE)	7	STEEL	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN <i>D. Matsune</i> 05.11.19	DESIGNED <i>D. Matsune</i> 05.11.19	CHECKED <i>E. Kurii</i> 05.11.22	APPROVED <i>M. Sato</i> 05.11.24	RELEASED
DRAWING NO. EDC4-007759-73		PART NO. HR10-7P-6S(73)				
SACLE 2 : 1		CODE NO. CL110-0024-4-73				1/1
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.				

TO
R