


May.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
△					△						
△					△						
△					△						

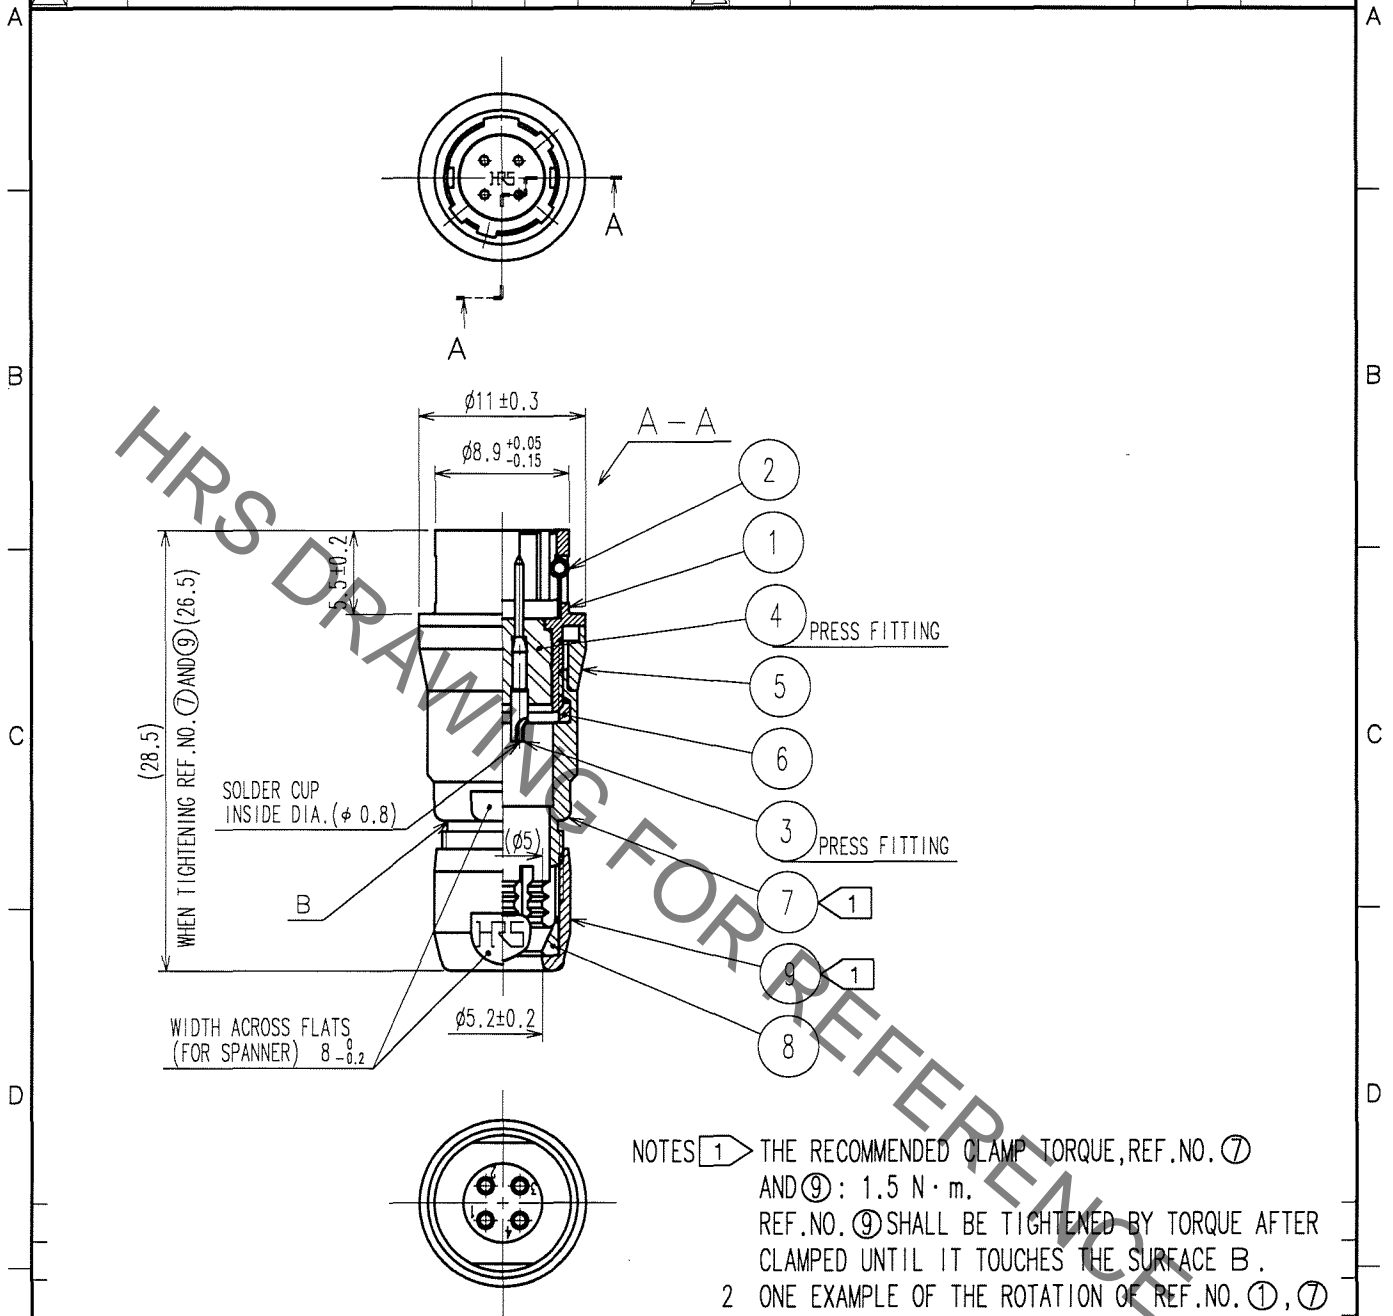

NOTES ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ AND ⑨: 1.5 N·m.
REF. NO. ⑨ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑦ AND ⑨ ARE SHOWN.

4	POLYAMIDE	(BLUE)	9	BRASS	MATTE FINISH NICKEL PLATED
3	BRASS	GOLD PLATING 0.2μm min. NICKEL UNDER PLATING 2μm min.	8	POLYAMIDE	
2	STAINLESS STEEL		7	BRASS	MATTE FINISH NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	POLYAMIDE	
			5	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		<i>D. Matsume</i>	<i>D. Matsume</i>	<i>E. Kurii</i>	<i>M. Saito</i>	
		05.11.19	05.11.19	05.11.22	05.11.24	
DRAWING NO. EDC4-007763-73			PART NO. HR10-7J-4P(73)			
UNITS mm			CODE NO. CL110-0028-5-73			1/1

TO
R