


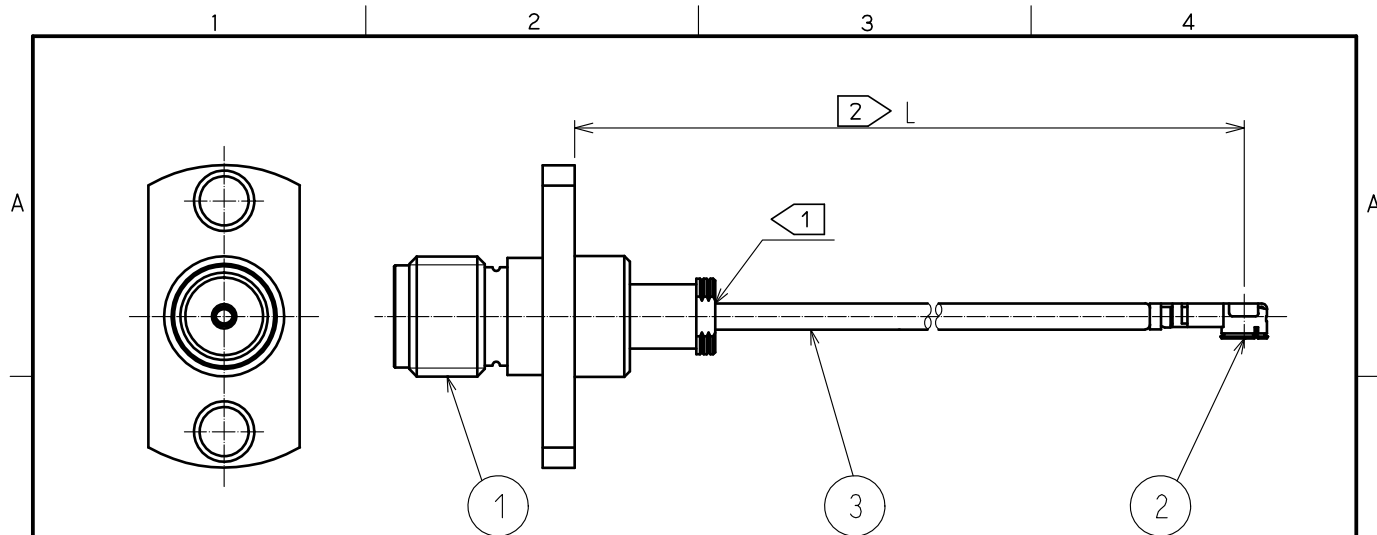

NOTE 1 Do not apply any excessive stress to the cable assembly position.

2 We indicate the length of the harness on the last of product name, 'L' part.

Tolerance for [L]

Length L [mm]	Tolerance [mm]
$\Delta 50 \leq L \leq 200$	± 4
$200 < L \leq 500$	± 8
$500 < L \leq 1000$	± 12
$1000 < L$	$\pm 1.5\%$


Part No.	Cable color
~088N1T~	GRAY
~088N2T~	BLACK
~088N3T~	WHITE

3. Connector rotation angle is within ± 45 degree from the above image.
For long length in the case of $L > 500$, the angle is optional.


4. Specifications are subject to change without notice.

PRECAUTIONS FOR HANDLING

- ◆ Connector insertion and extraction
 - a. Connector shall be extracted vertically by specialised extraction JIG.
Part No.: U.FL-LP-N-2 (CL Code: CL331-0494-5)
Never hold the cable when extracting the cable because it damages the connector.
 - b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting.
- ◆ Allowable loads on the cable after the connectors are mated.
The figures below show the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable.

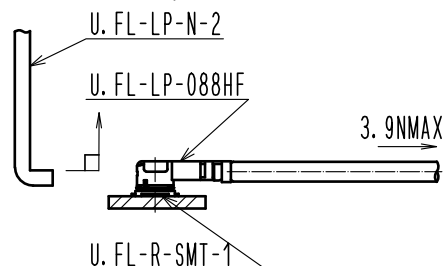

DIMENSIONS OF CONNECTOR

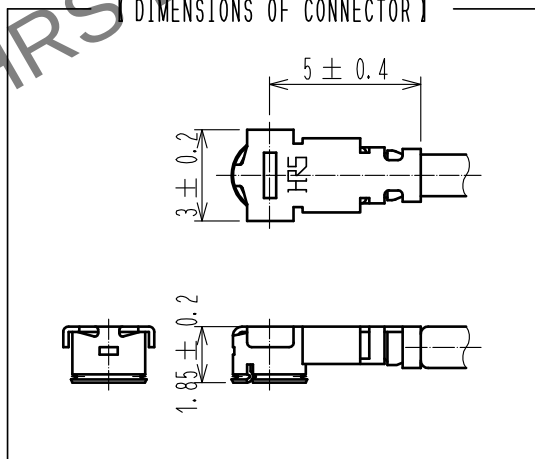

2	U.FL-LP-088HF(06)	CL331-0560-8-06	3	RF-MF50141	NISSEI ELECTRIC CO., LTD.
1	HRM-200-088PJ2BN(40)	CL323-0802-0-40			
N o.	PART NO.	CODE NO.	N o.	PART NO.	MANUFACTURER
UNITS mm		SCALE FREE	COUNT 1	DESCRIPTION OF REVISIONS DIS-D-00003732	DESIGNED NK. OOSAWA
					CHECKED TO. KATAYAMA
					DATE 20181206
APPROVED : TO. KATAYAMA 20180705			DRAWING NO.		
CHECKED : TO. KATAYAMA 20180705			PART NO.		
DESIGNED : YI. FUNADA 20180705			CODE NO.		
DRAWN : YI. FUNADA 20180705			HPJ2-UFLHF6-088N*T-ALRS		