


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△						△					
△						△					
△						△					

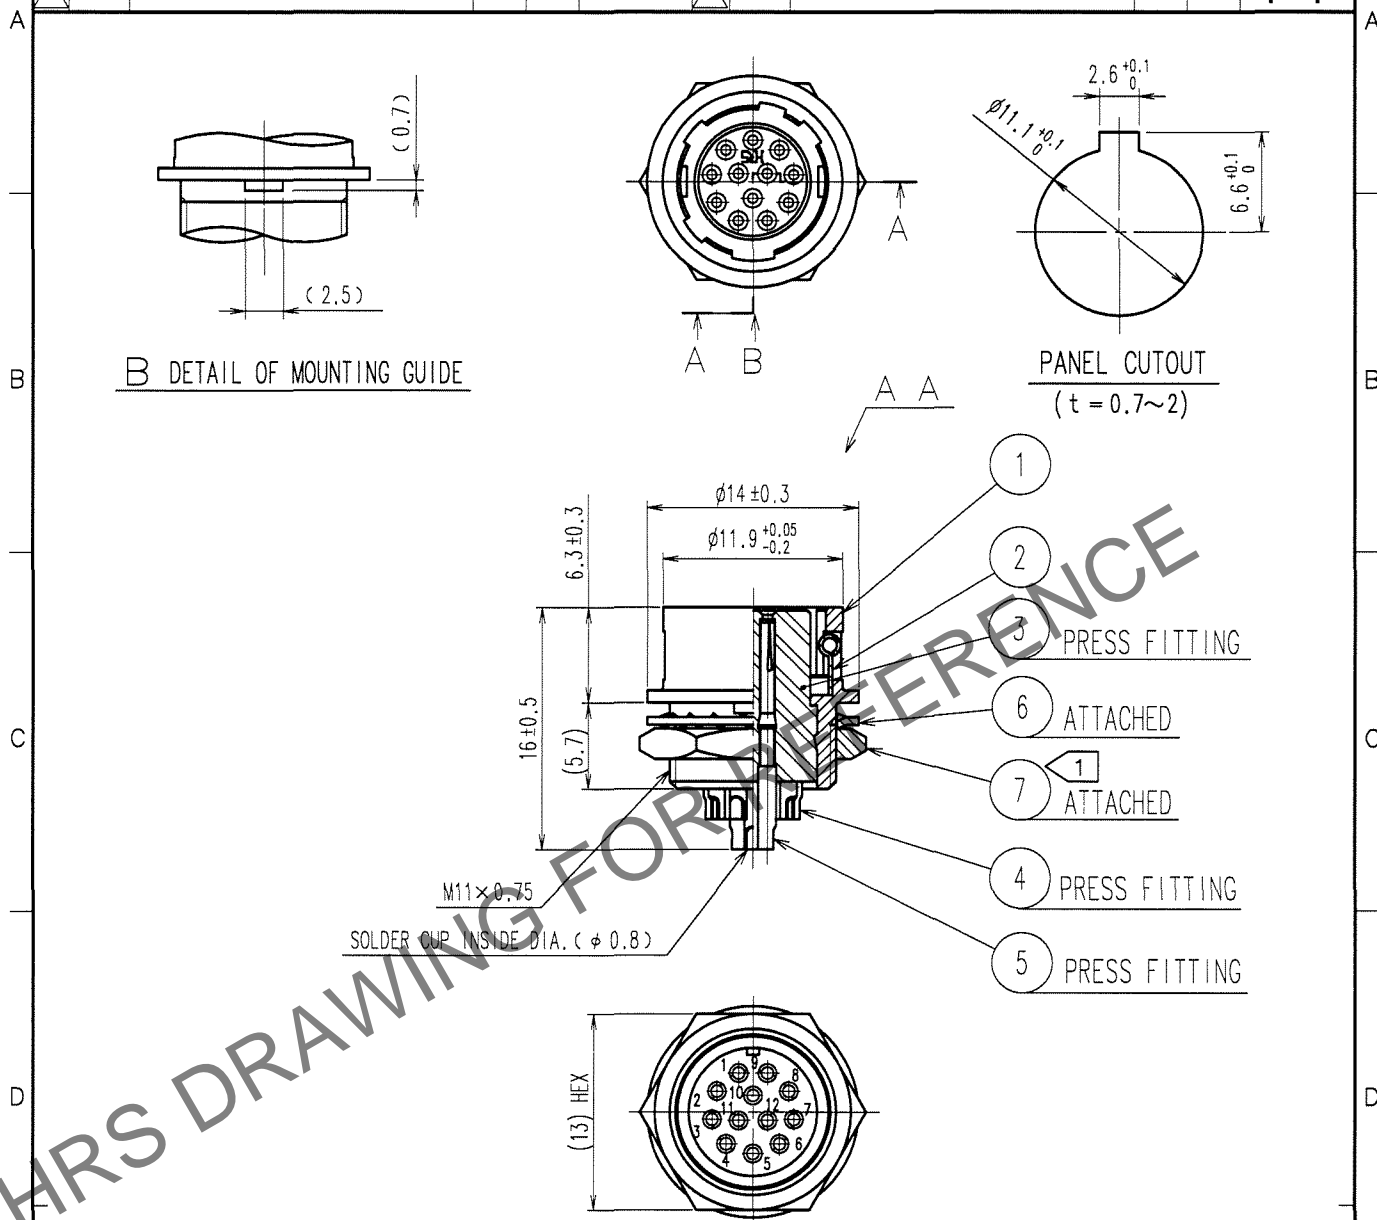

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. 7 TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. 7 FROM LOOSENING.

3	POLYAMIDE	(BLUE)	7	BRASS	NICKEL PLATING
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BERYLLIUM COPPER	GOLD PLATING 0.2μm min. NICKEL UNDER PLATING 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN T. Komatsu 05.11.30	DESIGNED D. Matsume 05.11.30	CHECKED E. Kunii 05.11.30	APPROVED M. Sato 05.11.30	RELEASED
----------------------	---------------------------------	------------------------------------	---------------------------------	---------------------------------	----------

DRAWING NO. EDC4-007770-73	PART NO. HR10-10R-12S(73)
CODE NO. CL110-0035-0-73	1/1