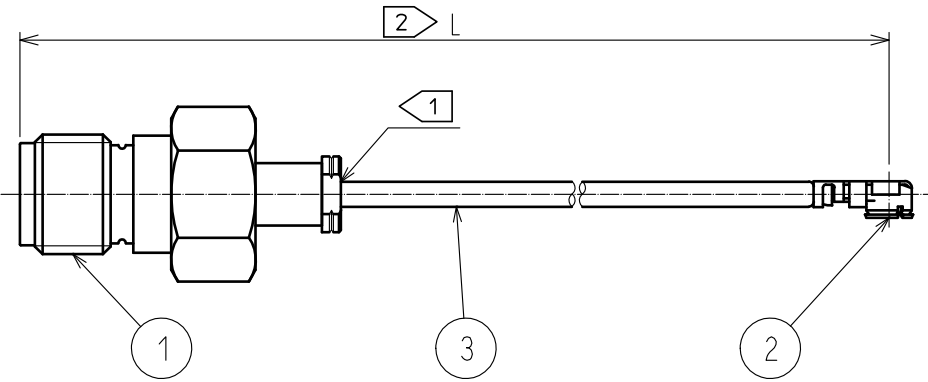
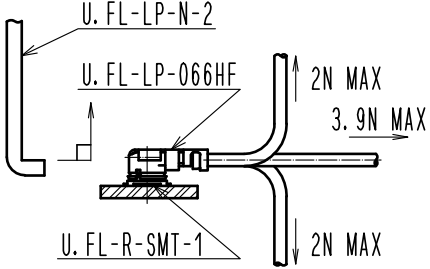
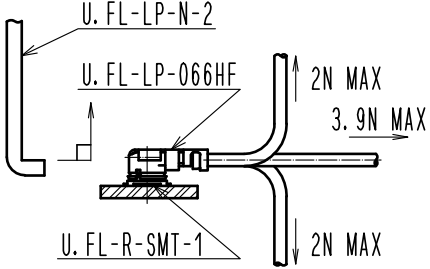
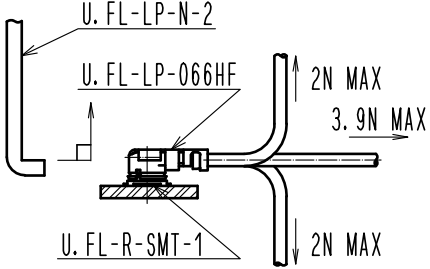
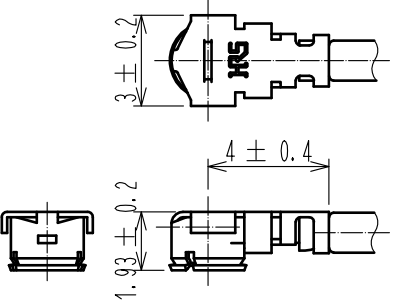


1	2	3	4																																						
A				A																																					
B	NOTE 1 Do not apply any excessive stress to the cable assembly position. 2 We indicate the length of the harness on the last of product name. 'L' part. <table><tr><th colspan="2">Tolerance for [L]</th></tr><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr><tr><td>$\triangle 50 \leq L \leq 200$</td><td>$\pm 4$</td></tr><tr><td>$200 < L \leq 500$</td><td>$\pm 8$</td></tr><tr><td>$500 < L \leq 1000$</td><td>$\pm 12$</td></tr><tr><td>$1000 < L$</td><td>$\pm 1.5\%$</td></tr></table> <table><tr><th>Part No.</th><th>Cable color</th></tr><tr><td>~066N1~</td><td>GRAY</td></tr><tr><td>~066N2~</td><td>BLACK</td></tr><tr><td>~066N3~</td><td>WHITE</td></tr></table>			Tolerance for [L]		Length L [mm]	Tolerance [mm]	$\triangle 50 \leq L \leq 200$	± 4	$200 < L \leq 500$	± 8	$500 < L \leq 1000$	± 12	$1000 < L$	$\pm 1.5\%$	Part No.	Cable color	~066N1~	GRAY	~066N2~	BLACK	~066N3~	WHITE	B																	
Tolerance for [L]																																									
Length L [mm]	Tolerance [mm]																																								
$\triangle 50 \leq L \leq 200$	± 4																																								
$200 < L \leq 500$	± 8																																								
$500 < L \leq 1000$	± 12																																								
$1000 < L$	$\pm 1.5\%$																																								
Part No.	Cable color																																								
~066N1~	GRAY																																								
~066N2~	BLACK																																								
~066N3~	WHITE																																								
C	3. Specifications are subject to change without notice. <table><tr><th colspan="2">[PRECAUTIONS FOR HANDLING]</th></tr><tr><td colspan="2"> ◆ Connector insertion and extraction a. Connector shall be extracted vertically by specialised extraction JIG. Part No. :U.FL-LP-N-2CCL Code:CL331-0494-5) Never hold the cable when extracting the cable because it damages the connector. b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting. ◆ Allowable loads on the cable after the connectors are mated. The figures below shot the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable. </td></tr></table>			[PRECAUTIONS FOR HANDLING]		◆ Connector insertion and extraction a. Connector shall be extracted vertically by specialised extraction JIG. Part No. :U.FL-LP-N-2CCL Code:CL331-0494-5) Never hold the cable when extracting the cable because it damages the connector. b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting. ◆ Allowable loads on the cable after the connectors are mated. The figures below shot the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable. 		C																																	
[PRECAUTIONS FOR HANDLING]																																									
◆ Connector insertion and extraction a. Connector shall be extracted vertically by specialised extraction JIG. Part No. :U.FL-LP-N-2CCL Code:CL331-0494-5) Never hold the cable when extracting the cable because it damages the connector. b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting. ◆ Allowable loads on the cable after the connectors are mated. The figures below shot the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable. 																																									
D	[DIMENSIONS OF CONNECTOR] 			D																																					
E	<table><tr><td>2</td><td>U.FL-LP-066HF</td><td>CL331-0558-6-00</td><td>3</td><td>RF-MF5013</td><td>NISSEI ELECTRIC CO., LTD.</td></tr><tr><td>1</td><td>HRM-200-066JBN(40)</td><td>CL323-0793-1-40</td><td></td><td></td><td></td></tr><tr><td>No.</td><td>PART NO.</td><td>CODE NO.</td><td>No.</td><td>PART NO.</td><td>MANUFACTURER</td></tr></table> <table><tr><td>UNITS mm</td><td></td><td>SCALE FREE</td><td>COUNT $\triangle 1$</td><td>DESCRIPTION OF REVISIONS DIS-D-00003732</td><td>DESIGNED NK. OOSAWA</td><td>CHECKED TO. KATAYAMA</td><td>DATE 20181206</td></tr></table> <table><tr><td rowspan="4"></td><td>APPROVED :TO. KATAYAMA</td><td>20180705</td><td rowspan="4">DRAWING NO. PART NO. CODE NO.</td><td rowspan="4">HRMJ-UFLHF6-066N*-ALRS</td></tr><tr><td>CHECKED :TO. KATAYAMA</td><td>20180705</td></tr><tr><td>DESIGNED :YI. FUNADA</td><td>20180705</td></tr><tr><td>DRAWN :YI. FUNADA</td><td>20180705</td></tr></table>			2	U.FL-LP-066HF	CL331-0558-6-00	3	RF-MF5013	NISSEI ELECTRIC CO., LTD.	1	HRM-200-066JBN(40)	CL323-0793-1-40				No.	PART NO.	CODE NO.	No.	PART NO.	MANUFACTURER	UNITS mm		SCALE FREE	COUNT $\triangle 1$	DESCRIPTION OF REVISIONS DIS-D-00003732	DESIGNED NK. OOSAWA	CHECKED TO. KATAYAMA	DATE 20181206		APPROVED :TO. KATAYAMA	20180705	DRAWING NO. PART NO. CODE NO.	HRMJ-UFLHF6-066N*-ALRS	CHECKED :TO. KATAYAMA	20180705	DESIGNED :YI. FUNADA	20180705	DRAWN :YI. FUNADA	20180705	E
2	U.FL-LP-066HF	CL331-0558-6-00	3	RF-MF5013	NISSEI ELECTRIC CO., LTD.																																				
1	HRM-200-066JBN(40)	CL323-0793-1-40																																							
No.	PART NO.	CODE NO.	No.	PART NO.	MANUFACTURER																																				
UNITS mm		SCALE FREE	COUNT $\triangle 1$	DESCRIPTION OF REVISIONS DIS-D-00003732	DESIGNED NK. OOSAWA	CHECKED TO. KATAYAMA	DATE 20181206																																		
	APPROVED :TO. KATAYAMA	20180705	DRAWING NO. PART NO. CODE NO.	HRMJ-UFLHF6-066N*-ALRS																																					
	CHECKED :TO. KATAYAMA	20180705																																							
	DESIGNED :YI. FUNADA	20180705																																							
	DRAWN :YI. FUNADA	20180705																																							
F	<table><tr><td colspan="2">FORM HC0011-5-51</td><td>2</td><td>3</td><td>4</td></tr></table>			FORM HC0011-5-51		2	3	4	F																																
FORM HC0011-5-51		2	3	4																																					