


1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

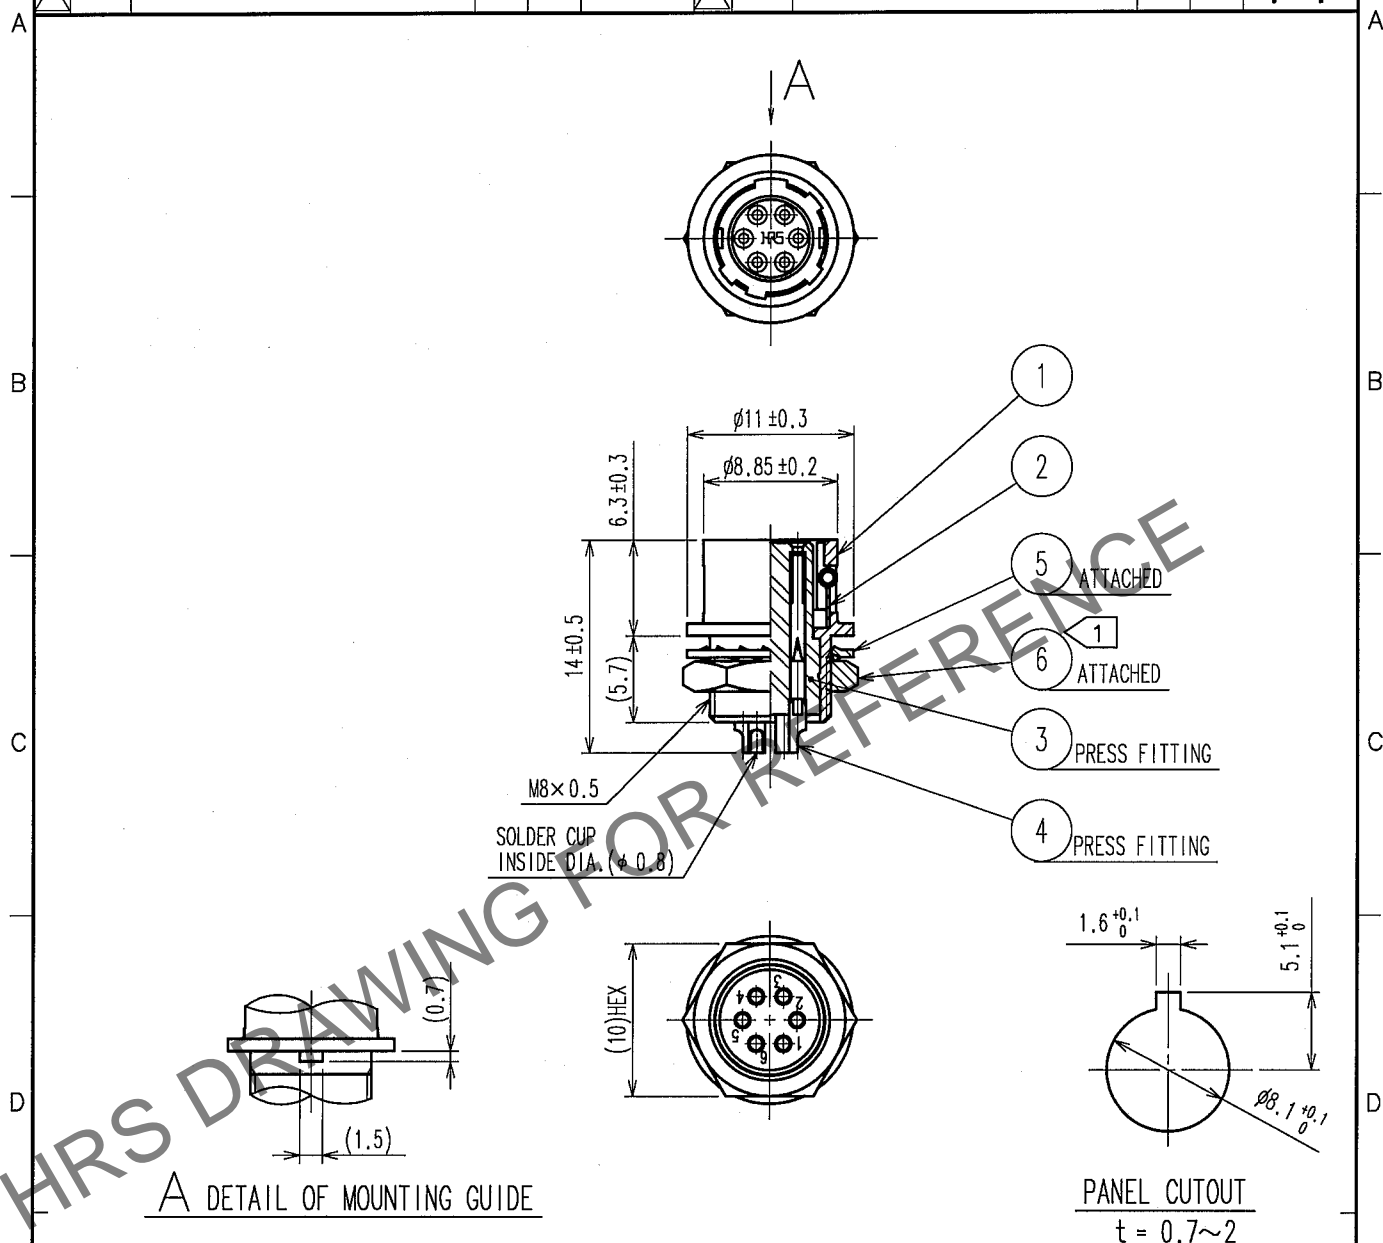

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 1.5 N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FROM LOOSENING.
② GOLD PLATING 0.2µ m min.
NICKEL UNDER PLATING 2µ m min.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	②
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL		S. Komatsu	D. Matsume	E. Kuroi	M. Sato	
		05.12.21	05.12.21	05.12.22	05.12.22	

SCALE	DRAWING NO.	PART NO.
2 : 1	EDC4-020540-74	HR10A-7R-6S(74)
UNITS	CODE NO.	
mm	CL110-0307-9-74	

HRS

HIROSE ELECTRIC CO., LTD.