


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△						△					
△						△					
△						△					

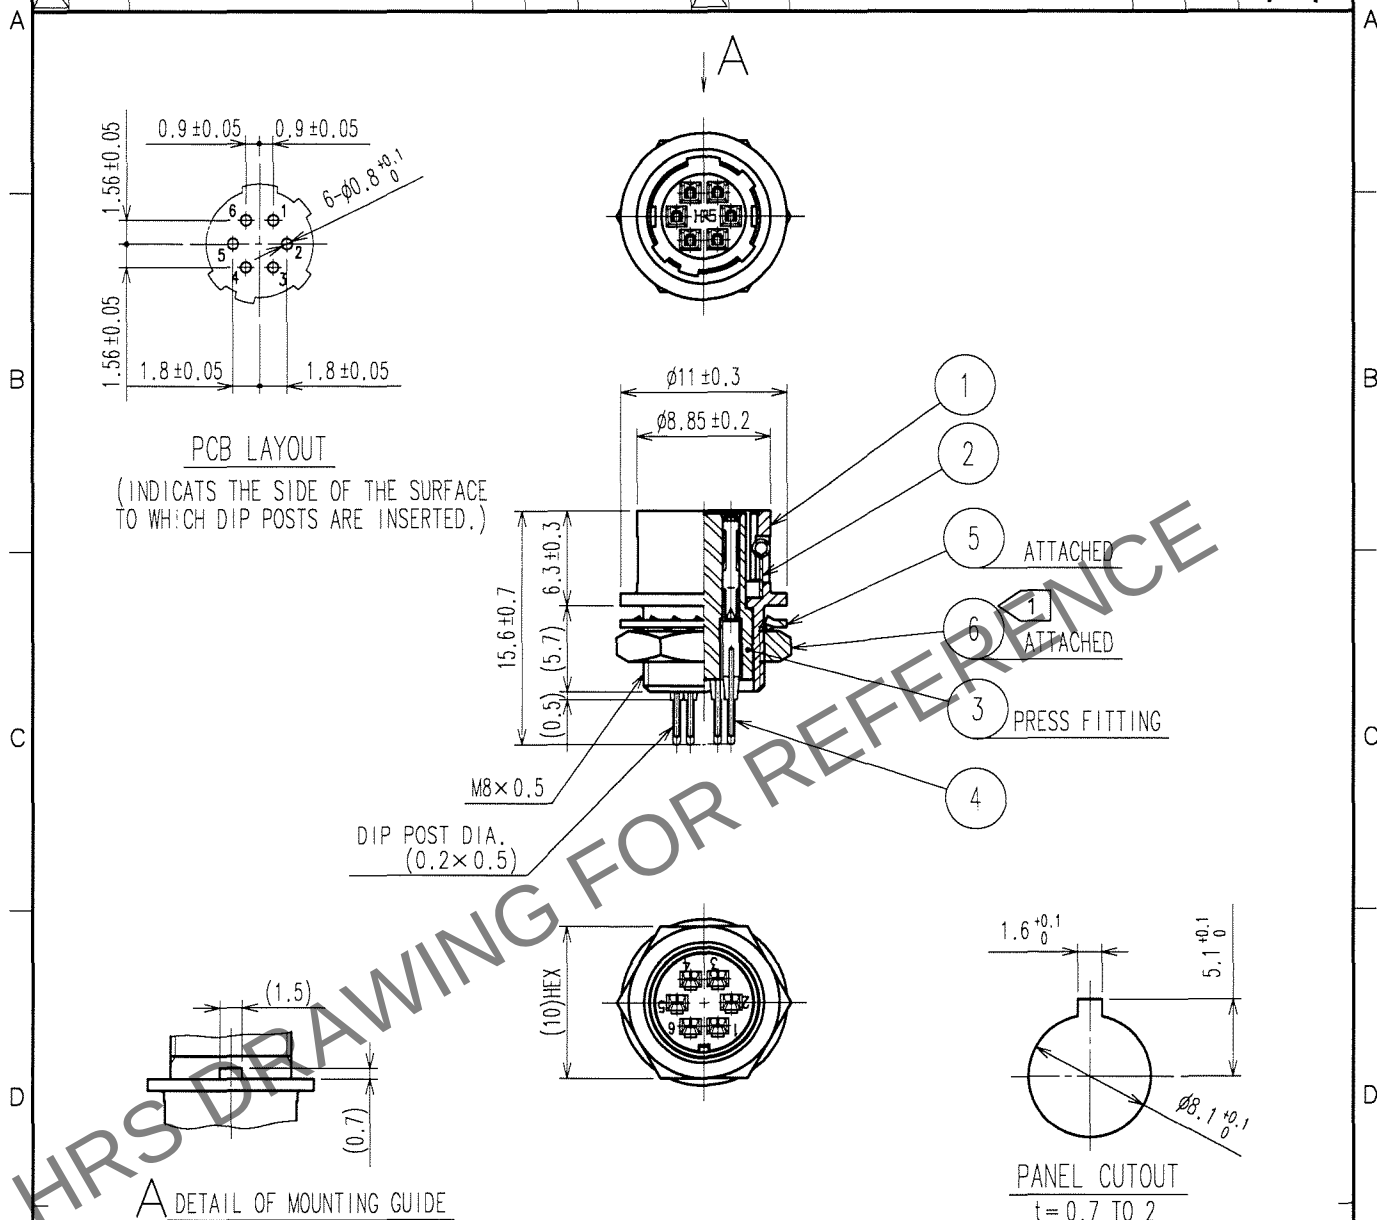

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑥ : $1.5\text{N} \cdot \text{m}$.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKLE PLATED	4	PHOSPHOR BRONZE	SILVER PLATING $2\mu\text{m min.}$
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN <i>M. Sato</i> 07.07.06	DESIGNED <i>T. Horie</i> 07.03.06	CHECKED <i>E. Kunii</i> 07.03.08	APPROVED <i>M. Sato</i> 07.03.08	RELEASED
----------------------	-------------------------------------	---	--	--	----------

SCALE 2 : 1	DRAWING NO. EDC4-022529-73	PART NO. HR10A-7R-6SB(73)
UNITS mm	HIROSE ELECTRIC CO., LTD.	CODE NO. CL110-0316-0-73