
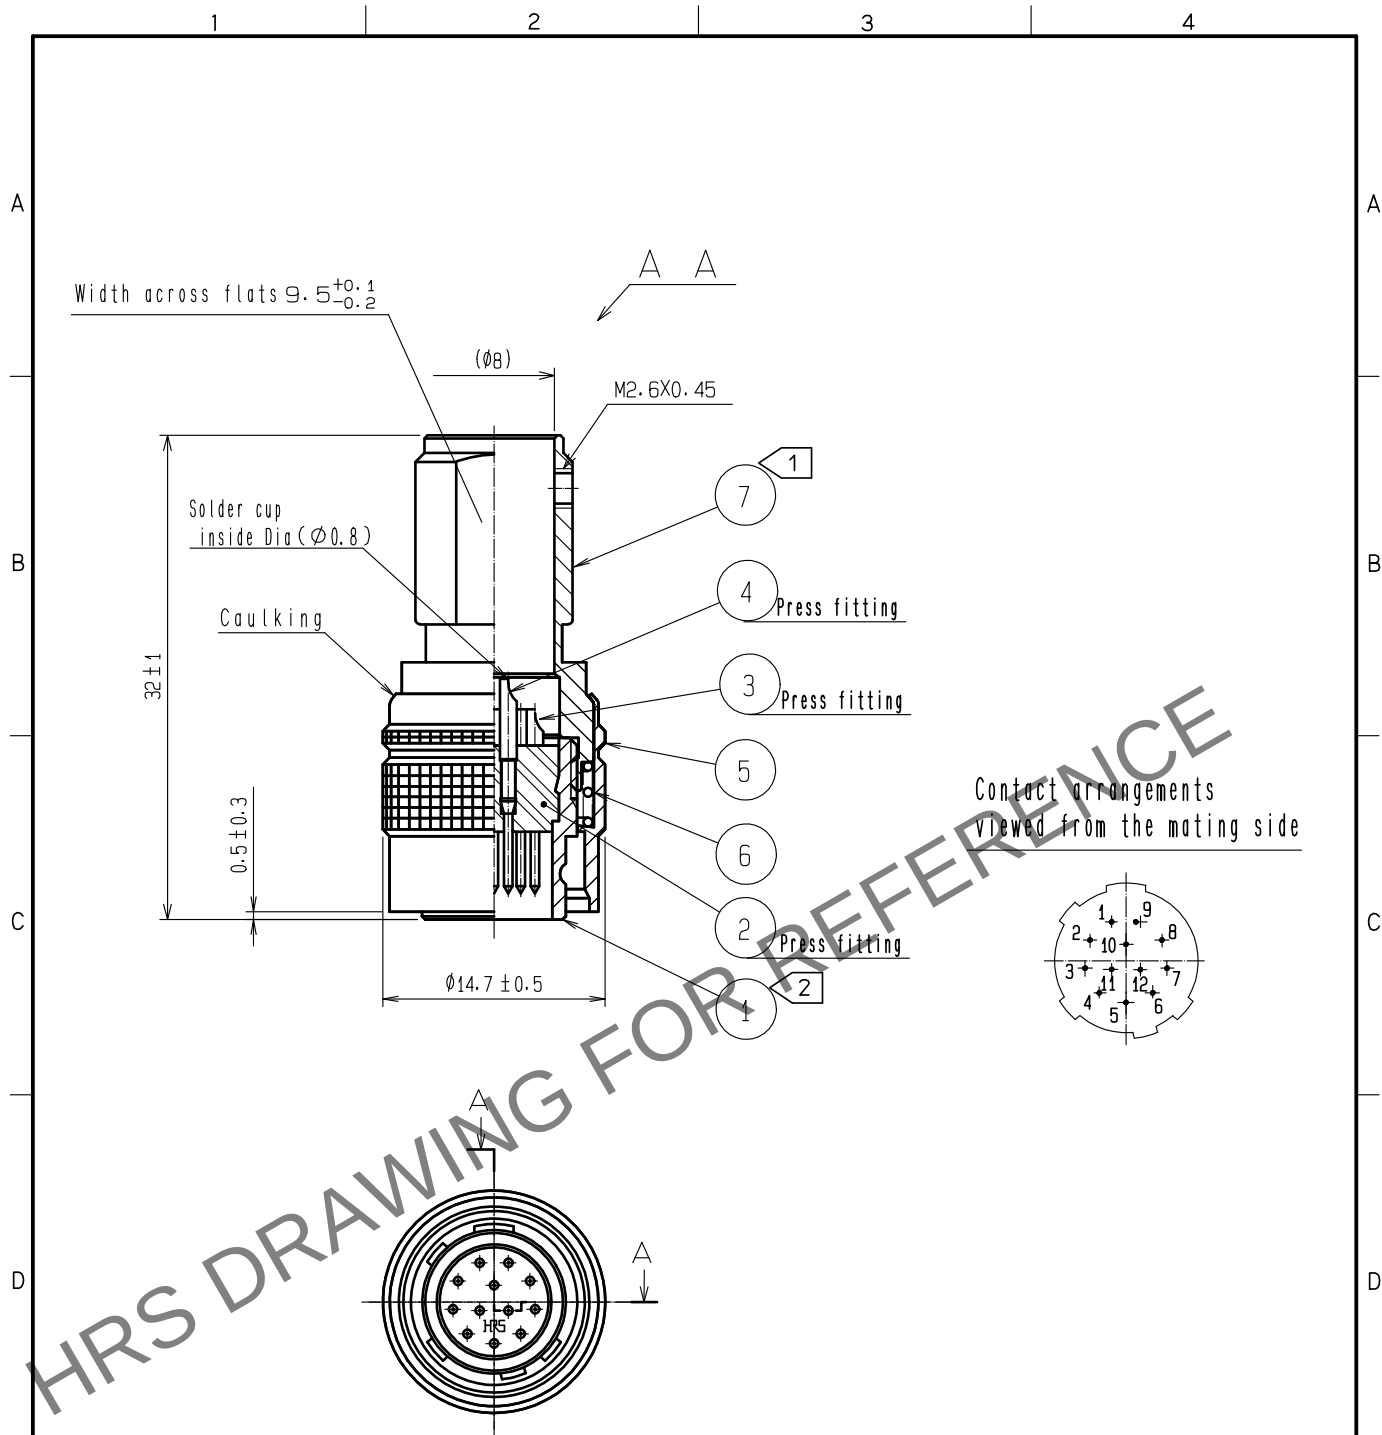




- Notes ① The recommended tightening torque, REF. NO. ⑦: 2 to 2.5 N·m.
② LOCTITE 263, HENKEL JAPAN or equivalent applies to prevent REF. NO. ① for loosening.
③ One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.
④ The assembly this product applies to the manual ETAD-C0354-00

4	Brass	Gold plating 0.2μ min.					
3	Brass	Nickel under plating 2μ min.	7	Brass	Nickel plating		
2	Polyamide	(Black) UL94V-0	6	Steel	Nickel plating		
1	Zinc alloy	Matte finish nickel plated	5	Brass	Black Chromate Treatment (Trivalent Chrome)		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT  2	DESCRIPTION OF REVISIONS DIS-C-00016953	DESIGNED HT. ZENBA	CHECKED EJ. KUNII	DATE 20240220
 HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	20150929	DRAWING NO.	EDC-010386-78-78		
		CHECKED : EJ. KUNII	20150929	PART NO.	HR10A-10P-12P<78>		
		DESIGNED : TP. KOMATSU	20150929	CODE NO.	CL0110-0401-7-78		
		DRAWN : TP. KOMATSU	20150929	 1			