


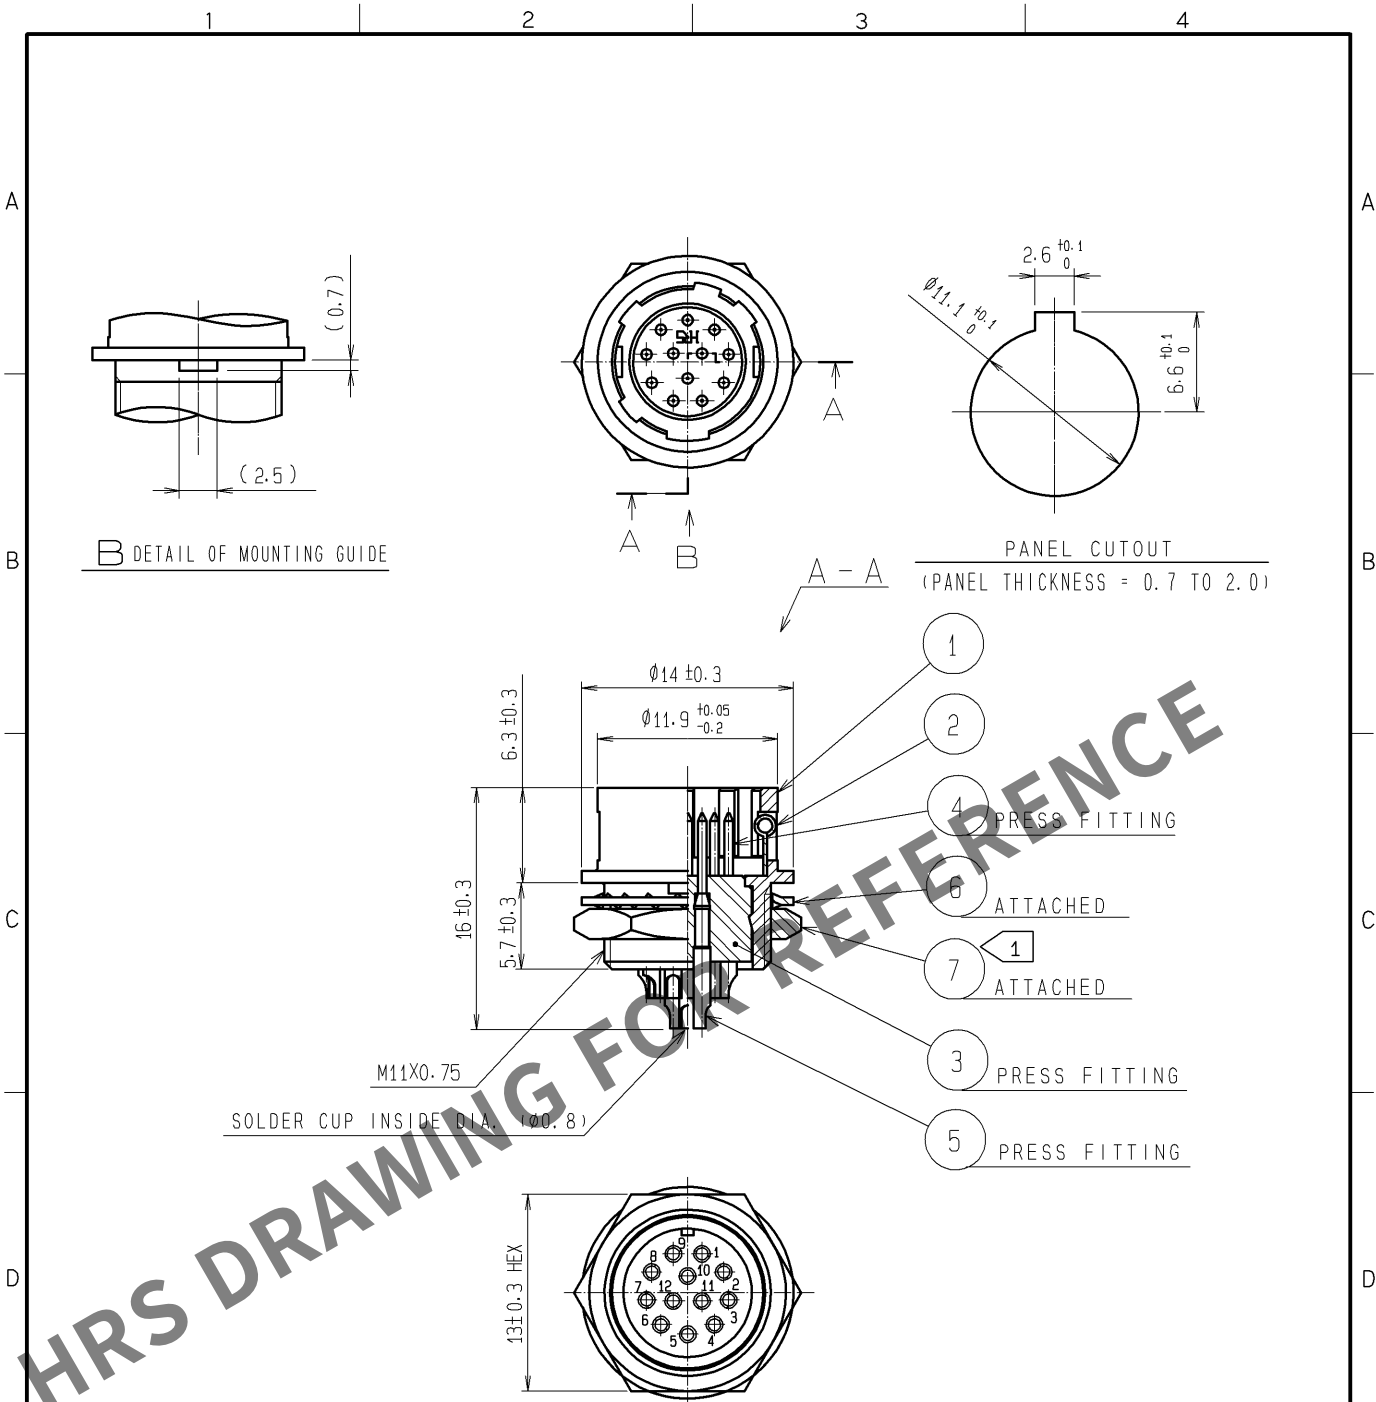

NOTE 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. NO. 7 TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. 7 FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATED							
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATED							
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	OVERPLATING : GOLD 0.2μm min UNDERPLATING : NICKEL 2.0 μm min							
			4	BRASS								
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS						
UNITS mm			SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-000585		DESIGNED TP. KOMATSU	CHECKED EJ. KUNII	DATE 07. 07. 27		
HIROSE ELECTRIC CO., LTD.			APPROVED : MO. SATOH			06. 09. 08		DRAWING NO.			EDC4-020553-74	
			CHECKED : KY. EZAWA			06. 09. 08		PART NO.			HR10A-10R-12P (74)	
			DESIGNED : YH. YAMADA			06. 09. 08		CODE NO.			CL110-0404-5-74	
			DRAWN : TY. SUZUKI			06. 09. 07					1 / 1	