


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
1	DIS-C-000585	T.K	E.K	07.07.27							

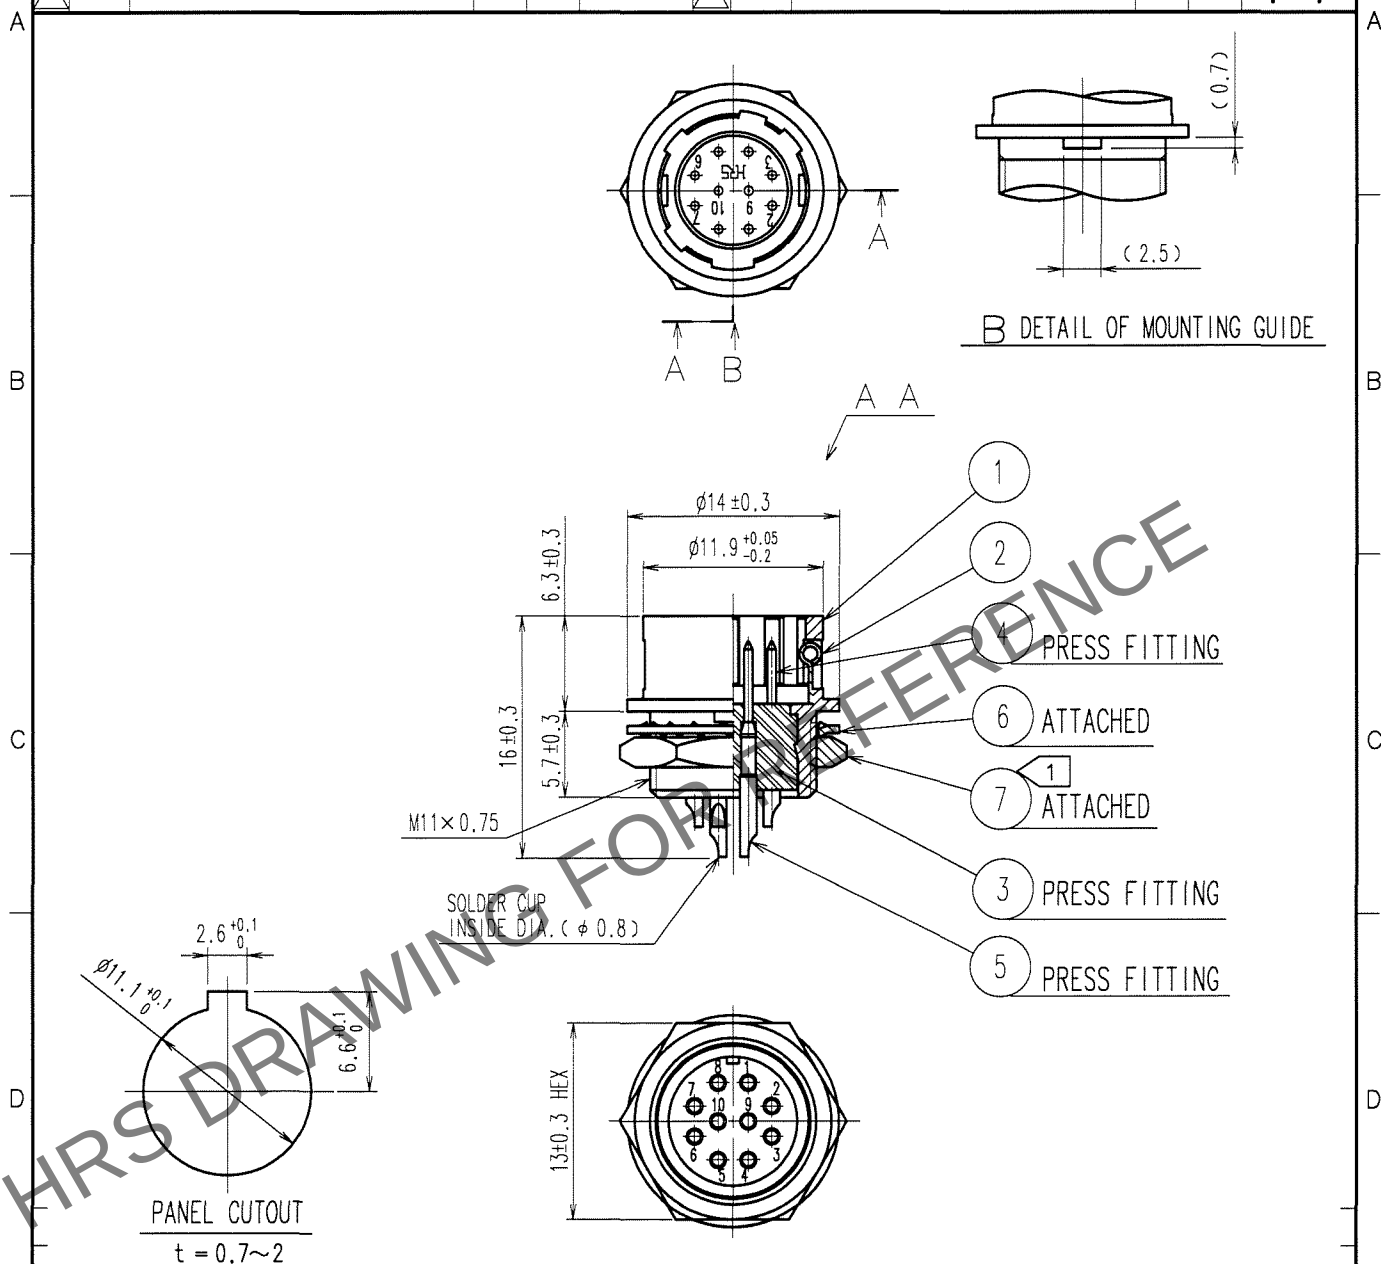

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. 7 TO BE 2 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. 7 FROM LOOSENING.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING
2	STAINLESS STEEL		6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	OVER PLATING:GOLD 0.2μ m min. UNDER PLATING:2μ m min.
4	BRASS				

CODE NO. (OLD) CL	DRAWN M.SATO '07 03 07	DESIGNED TO.HORII '07 03 07	CHECKED E.KUNII '07 03 08	APPROVED M.SATO '07 03 08	RELEASED
DRAWING NO. EDC4-021369-74		PART NO. HR10A-10R-10P(74)			
UNITS mm		CODE NO. CL110-0410-8-74			

TO
R